



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	ATTENTION

Machine Id  
**BAUER BG 39 4160363**

Component  
**Hydraulic System**

Fluid  
**CHEVRON CLARITY HYDRAULIC AW 68 (--- GAL)**

## RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

## WEAR

All component wear rates are normal.







## CONTAMINATION

Moderate concentration of visible dirt/debris present in the oil.

## FLUID CONDITION

Viscosity of sample indicates oil is within ISO 46 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0825165	---	---
Sample Date		Client Info		21 May 2024	---	---
Machine Age	hrs	Client Info		7105	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185m	>20	<1	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	<1	---	---
Lead	ppm	ASTM D5185m	>10	<1	---	---
Copper	ppm	ASTM D5185m	>75	2	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>20	5	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	▲ MODER	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m		3	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		14	---	---
Calcium	ppm	ASTM D5185m		181	---	---
Phosphorus	ppm	ASTM D5185m		217	---	---
Zinc	ppm	ASTM D5185m		132	---	---
Sulfur	ppm	ASTM D5185m		1524	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.17	---	---
Visc @ 40°C	cSt	ASTM D445	64.6	● 45.2	---	---

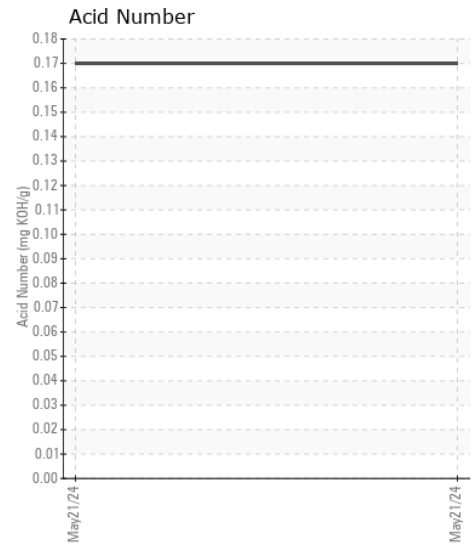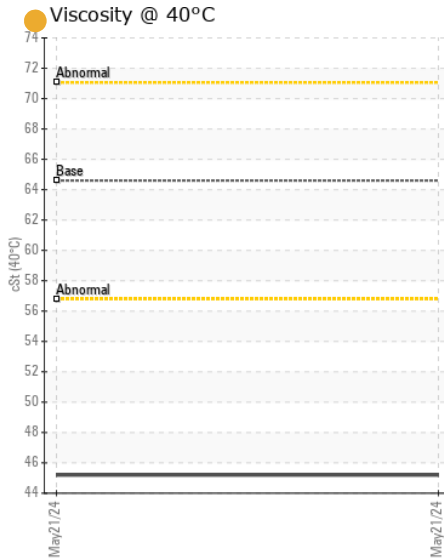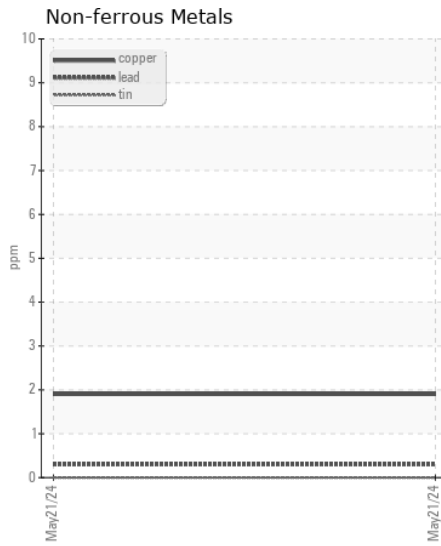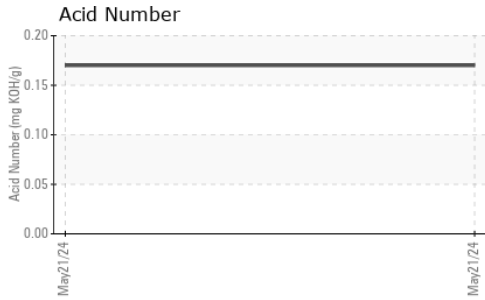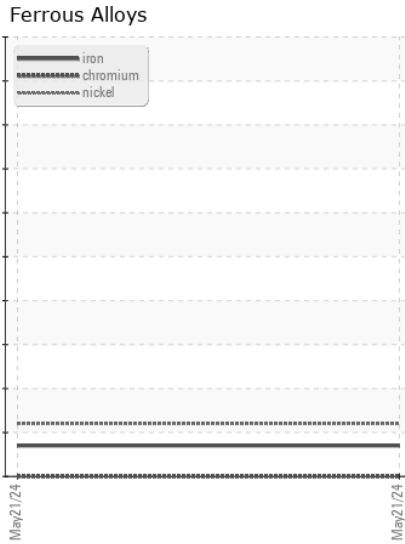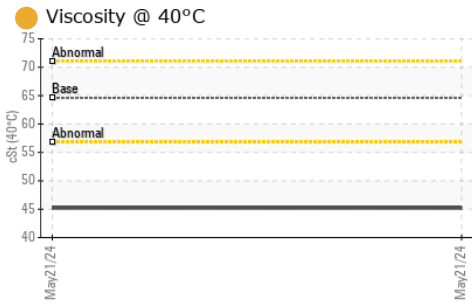

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0825165  
**Lab Number** : **06223987**  
**Unique Number** : 11102184  
**Test Package** : CONST

**Received** : 28 Jun 2024  
**Tested** : 03 Jul 2024  
**Diagnosed** : 03 Jul 2024 - Jonathan Hester

**KELLER - HOUSTON**  
 15410 HENRY RD  
 HOUSTON, TX  
 US 77060  
 Contact: CHARLIE JOHNS

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (281)931-4972