



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**198**  
 Component  
**Diesel Engine**  
 Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DE0000576</b>	PC0032537	---
Sample Date		Client Info		<b>03 May 2024</b>	08 Jun 2023	---
Machine Age	mls	Client Info		<b>0</b>	141375	---
Oil Age	mls	Client Info		<b>0</b>	1943	---
Filter Age	mls	Client Info		<b>0</b>	1943	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	Not Changed	---
Sample Status				<b>NORMAL</b>	SEVERE	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>63</b>	39	---
Chromium	ppm	ASTM D5185m	>20	<b>4</b>	3	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	0	---
Lead	ppm	ASTM D5185m	>40	<b>4</b>	1	---
Copper	ppm	ASTM D5185m	>330	<b>2</b>	<1	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>10</b>	7	---
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	1	---
Fuel	%	ASTM D3524	>5	<b>&lt;1.0</b>	▲ 39.5	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>2.9</b>	1.3	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>18.2</b>	16.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>31.5</b>	24.9	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	3	---
Boron	ppm	ASTM D5185m		<b>9</b>	<1	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>69</b>	40	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>1068</b>	624	---
Calcium	ppm	ASTM D5185m		<b>1160</b>	712	---
Phosphorus	ppm	ASTM D5185m		<b>1164</b>	680	---
Zinc	ppm	ASTM D5185m		<b>1355</b>	849	---
Sulfur	ppm	ASTM D5185m		<b>2923</b>	2254	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>30.6</b>	30.7	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.8</b>	7.0	---
Visc @ 100°C	cSt	ASTM D445		<b>15.3</b>	▲ 7.9	---

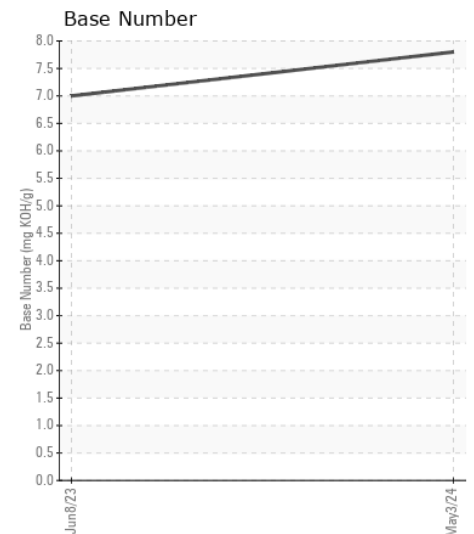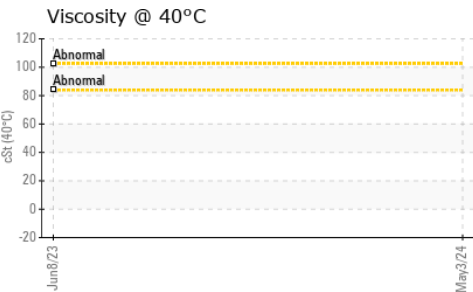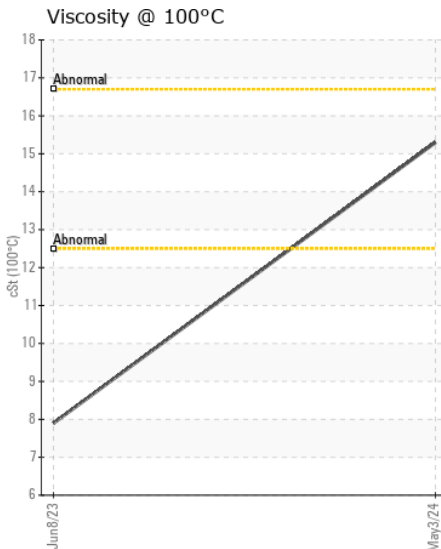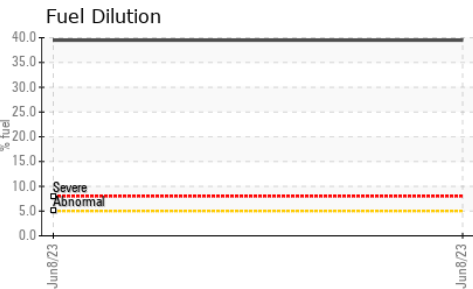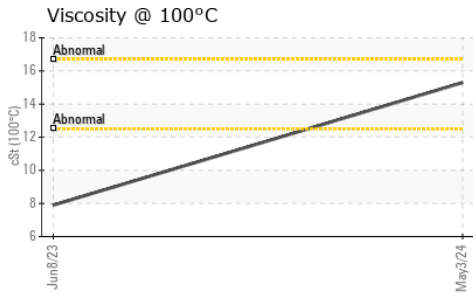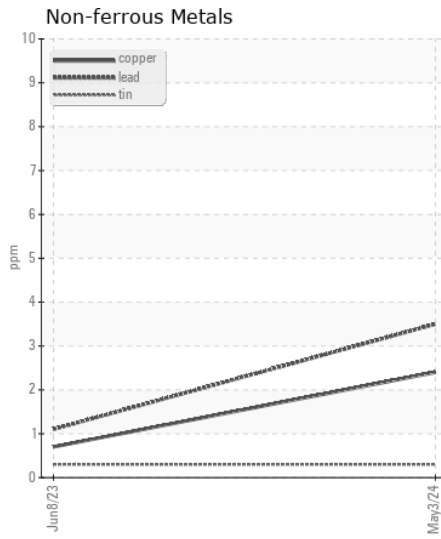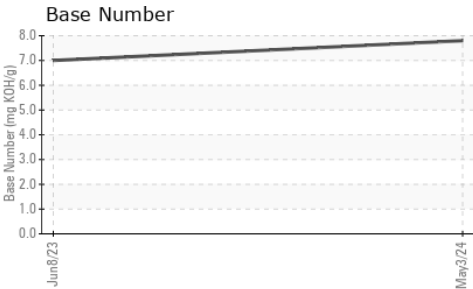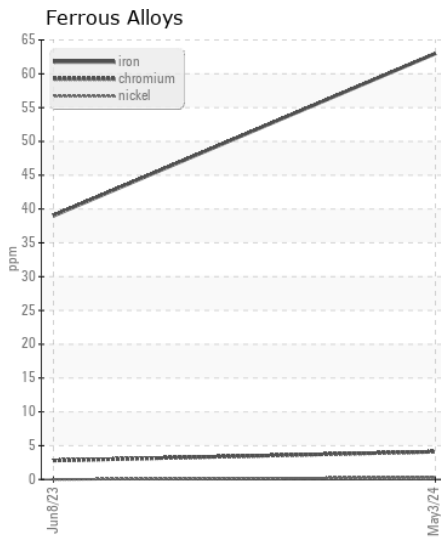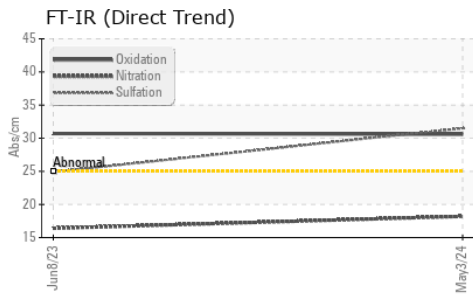

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DE0000576 **Received** : 28 Jun 2024  
**Lab Number** : 06224191 **Tested** : 01 Jul 2024  
**Unique Number** : 11102388 **Diagnosed** : 01 Jul 2024 - Angela Borella  
**Test Package** : FLEET ( Additional Tests: KV40, PercentFuel )

**Iroquois Bar Corp.**  
 155 Commerce Drive  
 Lacakwana, NY  
 US 14218  
 Contact: Denver Persinger  
 dpersinger@iroquoisbar.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: