



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
200
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON UHP 10W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DE0000488	PC0032522	---
Sample Date		Client Info		05 May 2024	30 Jun 2023	---
Machine Age	mls	Client Info		122226	111943	---
Oil Age	mls	Client Info		122226	7096	---
Filter Age	mls	Client Info		122226	7096	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	61	45	---
Chromium	ppm	ASTM D5185m	>20	3	2	---
Nickel	ppm	ASTM D5185m	>4	<1	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	4	4	---
Lead	ppm	ASTM D5185m	>40	1	<1	---
Copper	ppm	ASTM D5185m	>330	2	2	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	9	6	---
Potassium	ppm	ASTM D5185m	>20	8	8	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	1.8	1.2	---
Nitration	Abs/cm	*ASTM D7624	>20	15.6	13.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.8	24.9	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	4	---
Boron	ppm	ASTM D5185m	2	7	10	---
Barium	ppm	ASTM D5185m	0	<1	0	---
Molybdenum	ppm	ASTM D5185m	60	72	61	---
Manganese	ppm	ASTM D5185m	0	<1	<1	---
Magnesium	ppm	ASTM D5185m	1010	1098	1086	---
Calcium	ppm	ASTM D5185m	1070	1221	1308	---
Phosphorus	ppm	ASTM D5185m	1150	1269	1133	---
Zinc	ppm	ASTM D5185m	1270	1443	1459	---
Sulfur	ppm	ASTM D5185m	2060	3283	4056	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.3	22.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	6.9	6.8	---
Visc @ 100°C	cSt	ASTM D445	15.52	13.6	13.5	---

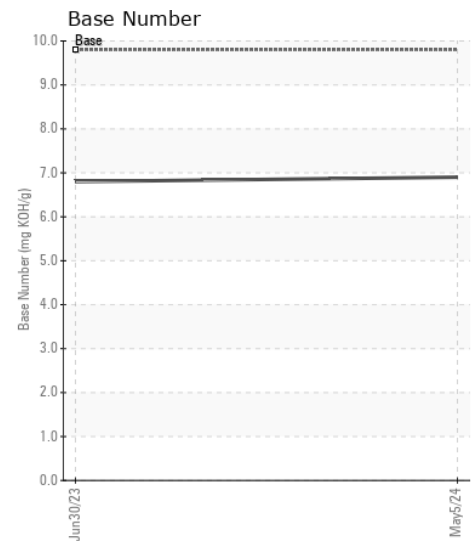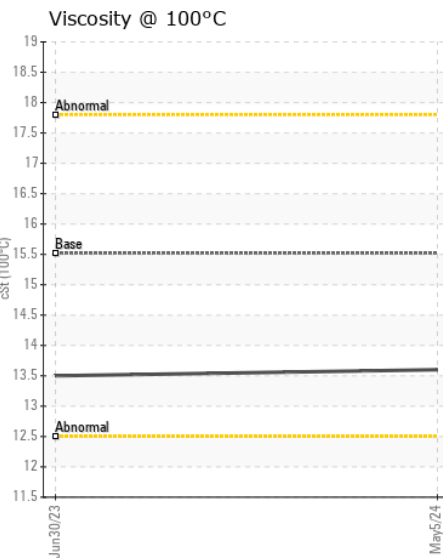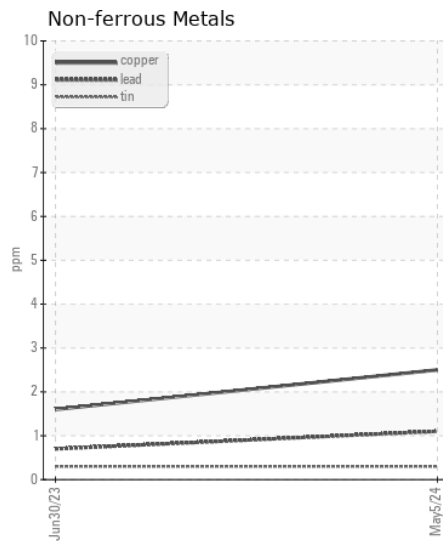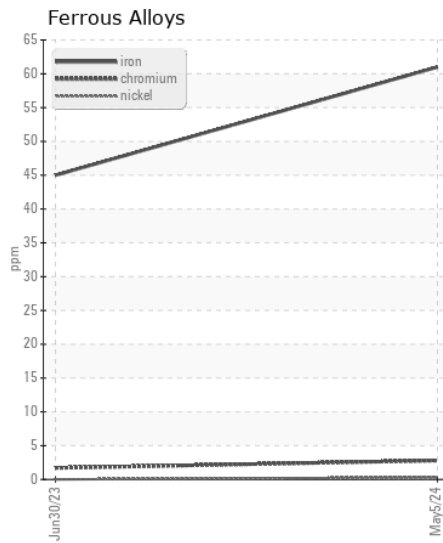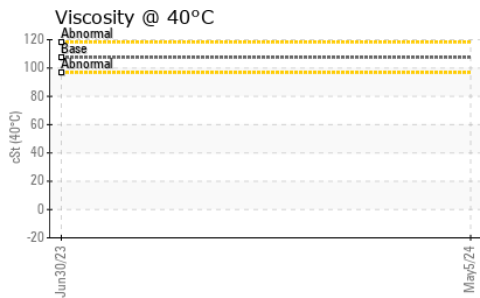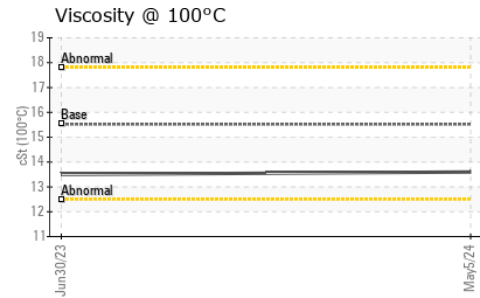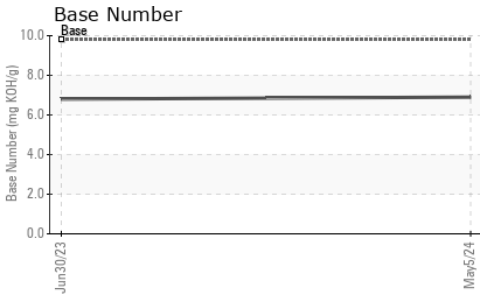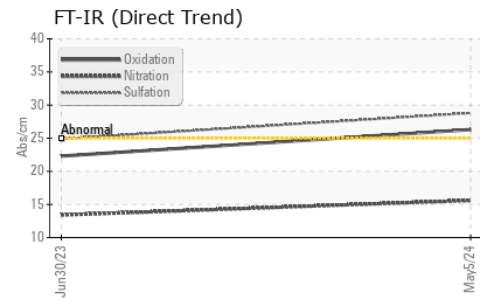

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DE0000488 **Received** : 28 Jun 2024
Lab Number : 06224198 **Tested** : 01 Jul 2024
Unique Number : 11102395 **Diagnosed** : 01 Jul 2024 - Angela Borella
Test Package : FLEET (Additional Tests: KV40)

Iroquois Bar Corp.
 155 Commerce Drive
 Lacakwana, NY
 US 14218
 Contact: Denver Persinger
 dpersinger@iroquoisbar.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: