



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>ATTENTION</b>

Machine Id  
**420009-1310**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (46 QTS)**

**RECOMMENDATION**

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0120901</b>	GFL0110340	GFL0110296
Sample Date		Client Info		<b>26 Jun 2024</b>	02 Apr 2024	05 Mar 2024
Machine Age	hrs	Client Info		<b>9552</b>	9018	8878
Oil Age	hrs	Client Info		<b>580</b>	580	436
Filter Age	hrs	Client Info		<b>580</b>	580	436
Oil Changed		Client Info		<b>Changed</b>	Changed	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Changed	Not Changd
Sample Status				<b>ATTENTION</b>	ATTENTION	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>17</b>	14	8
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>7</b>	4	3
Lead	ppm	ASTM D5185m	>40	<b>2</b>	1	<1
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	1	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>5</b>	4	3
Potassium	ppm	ASTM D5185m	>20	<b>14</b>	6	4
Fuel		WC Method	>2.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.6</b>	8.3	7.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	18.8	18.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		<b>5</b>	3	4
Boron	ppm	ASTM D5185m	0	<b>8</b>	7	4
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>71</b>	64	57
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	1010	<b>1048</b>	933	864
Calcium	ppm	ASTM D5185m	1070	<b>1247</b>	1140	1009
Phosphorus	ppm	ASTM D5185m	1150	<b>1260</b>	1088	917
Zinc	ppm	ASTM D5185m	1270	<b>1440</b>	1249	1149
Sulfur	ppm	ASTM D5185m	2060	<b>3447</b>	3186	2828
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.7</b>	14.7	14.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.1</b>	7.5	7.6
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.1</b>	12.2	12.6

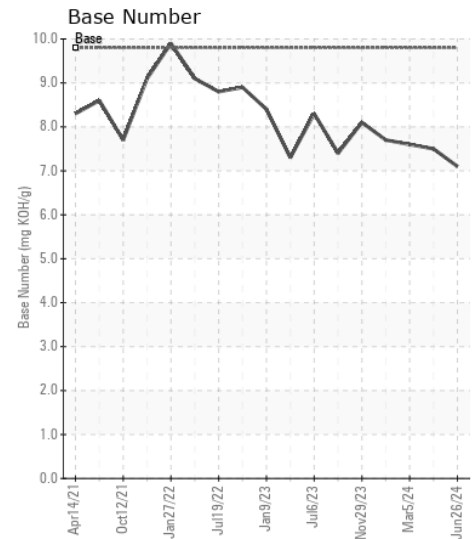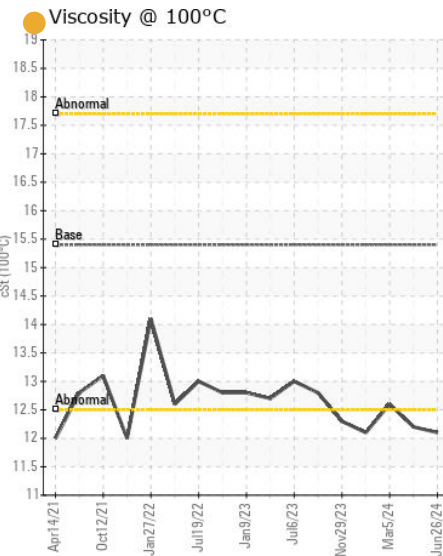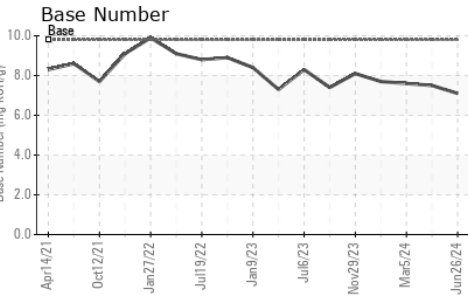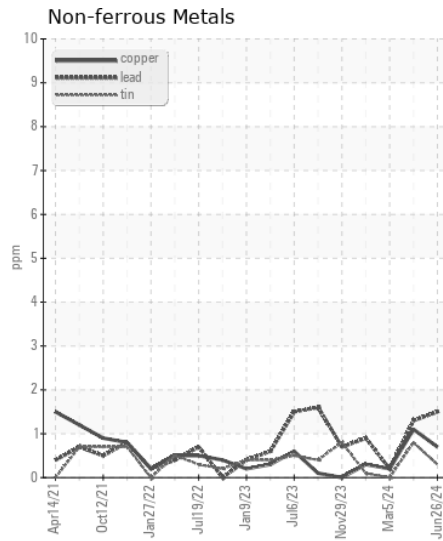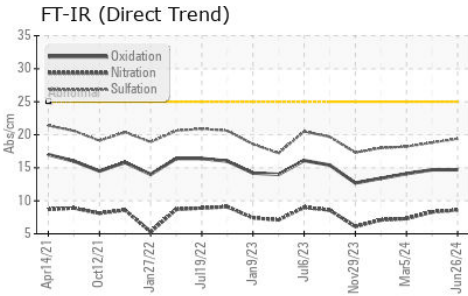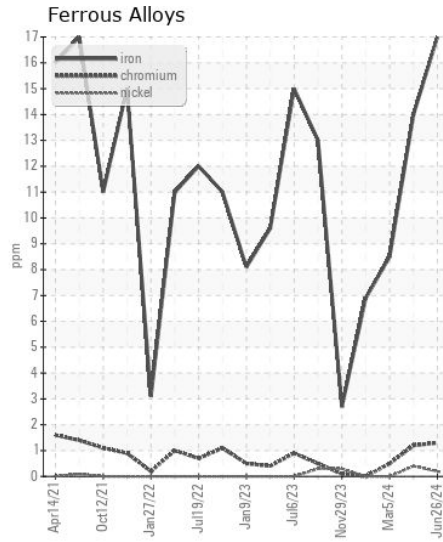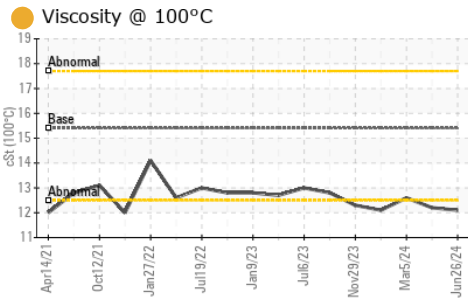

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0120901  
**Lab Number** : 06224227  
**Unique Number** : 11102424  
**Test Package** : FLEET

**Received** : 28 Jun 2024  
**Tested** : 01 Jul 2024  
**Diagnosed** : 01 Jul 2024 - Angela Borella

**GFL Environmental - 622 - Traverse City Hauling**  
 160 Hughes Dr  
 Traverse City, MI  
 US 49686  
 Contact: GARY BREWER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: