



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 410E-II 1DW410EYJNF715032
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (52 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0221013	JR0214117	JR0201076
Sample Date		Client Info		27 Jun 2024	29 Apr 2024	30 Jan 2024
Machine Age	hrs	Client Info		4399	3871	3362
Oil Age	hrs	Client Info		528	509	628
Filter Age	hrs	Client Info		528	509	628
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	10	13	13
Chromium	ppm	ASTM D5185m	>11	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>31	3	5	3
Lead	ppm	ASTM D5185m	>26	5	3	5
Copper	ppm	ASTM D5185m	>26	4	9	8
Tin	ppm	ASTM D5185m	>4	2	2	2
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	6	7	8
Potassium	ppm	ASTM D5185m	>20	0	3	3
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	9.0	9.2	9.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.8	23.4	23.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	4	3	0
Boron	ppm	ASTM D5185m		128	175	140
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		247	253	260
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		871	795	840
Calcium	ppm	ASTM D5185m		1574	1366	1271
Phosphorus	ppm	ASTM D5185m		943	898	846
Zinc	ppm	ASTM D5185m		1138	1066	1069
Sulfur	ppm	ASTM D5185m		3839	3059	2926
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.8	17.1	17.6
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.8	8.0	7.6
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	12.6	12.8


FT-IR (Direct Trend)

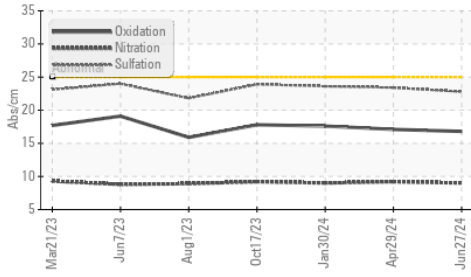


Ferrous Alloys

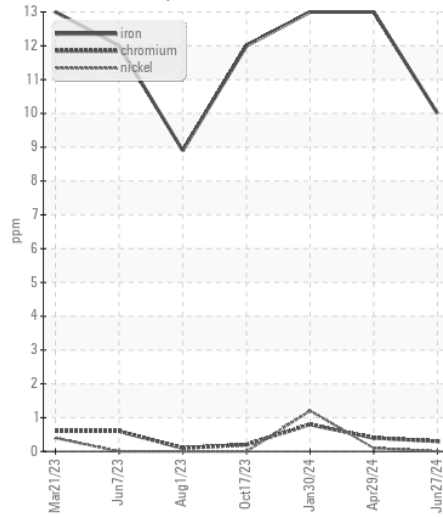


Base Number

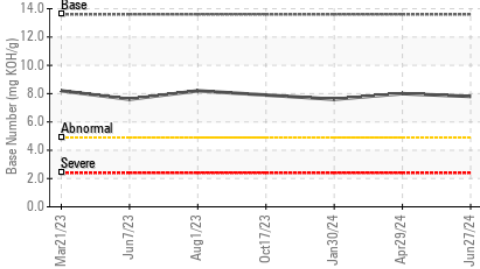


Non-ferrous Metals

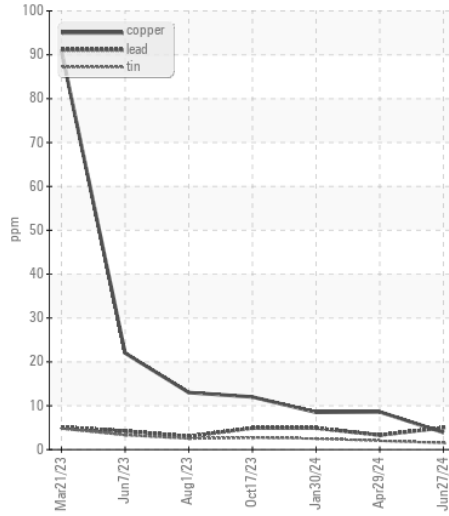


Viscosity @ 100°C

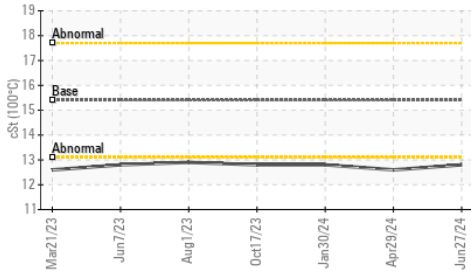

Viscosity @ 100°C

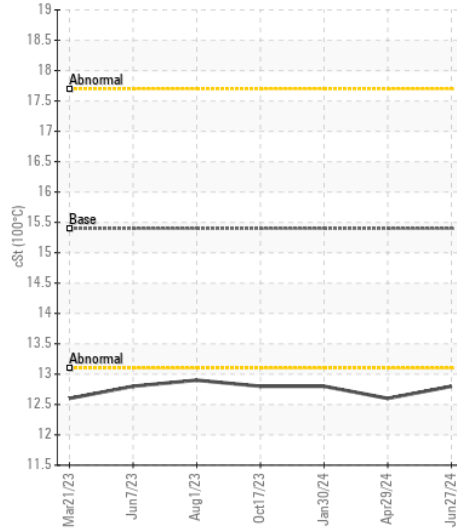

Base Number

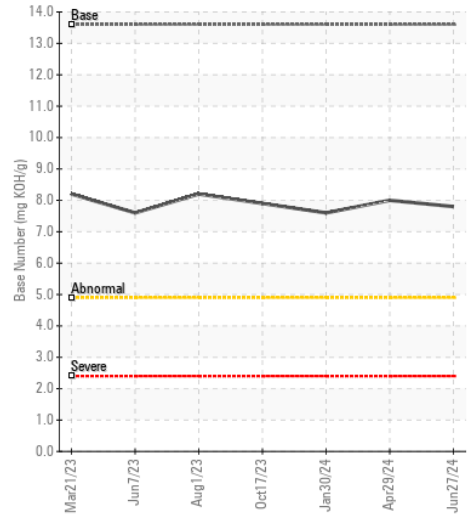

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0221013

Lab Number : 06224312

Unique Number : 11102509

Test Package : CONST (Additional Tests: TBN)

Received : 01 Jul 2024

Tested : 02 Jul 2024

Diagnosed : 02 Jul 2024 - Wes Davis

JRE - NEW BERN

3816 MARTIN LUTHER KING BLVD

NEW BERN, NC

US 28562

Contact: NEW BERN SHOP

nick.etheridge@jamesriverequipment.com;canastasio@wearcheckusa.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: