



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 948L 714996
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0223149	JR0174302	---
Sample Date		Client Info		30 Jun 2024	17 Jul 2023	---
Machine Age	hrs	Client Info		1250	505	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	15	46	---
Chromium	ppm	ASTM D5185m	>11	<1	1	---
Nickel	ppm	ASTM D5185m	>5	6	▲ 28	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	3	5	---
Lead	ppm	ASTM D5185m	>26	<1	<1	---
Copper	ppm	ASTM D5185m	>26	1	39	---
Tin	ppm	ASTM D5185m	>4	<1	2	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	6	10	---
Potassium	ppm	ASTM D5185m	>20	0	11	---
Fuel		WC Method	>2.1	<1.0	0.2	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	6.7	8.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.8	21.5	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	2	5	---
Boron	ppm	ASTM D5185m		190	155	---
Barium	ppm	ASTM D5185m		<1	<1	---
Molybdenum	ppm	ASTM D5185m		222	223	---
Manganese	ppm	ASTM D5185m		<1	3	---
Magnesium	ppm	ASTM D5185m		869	883	---
Calcium	ppm	ASTM D5185m		1543	1472	---
Phosphorus	ppm	ASTM D5185m		990	944	---
Zinc	ppm	ASTM D5185m		1180	1175	---
Sulfur	ppm	ASTM D5185m		3965	3707	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	16.1	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.1	8.2	---
Visc @ 100°C	cSt	ASTM D445		12.8	10.2	---

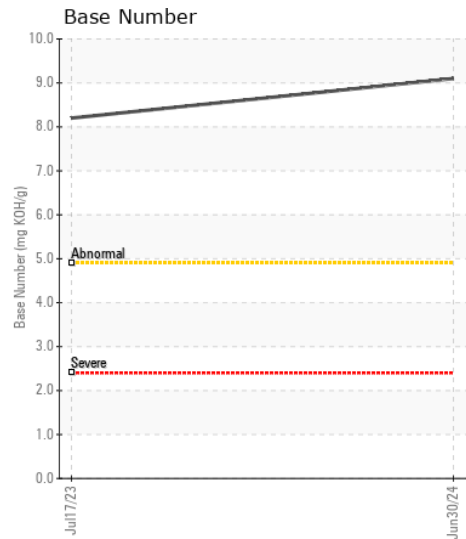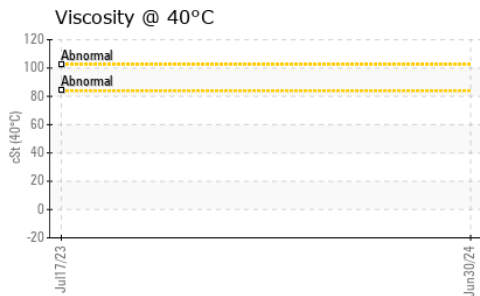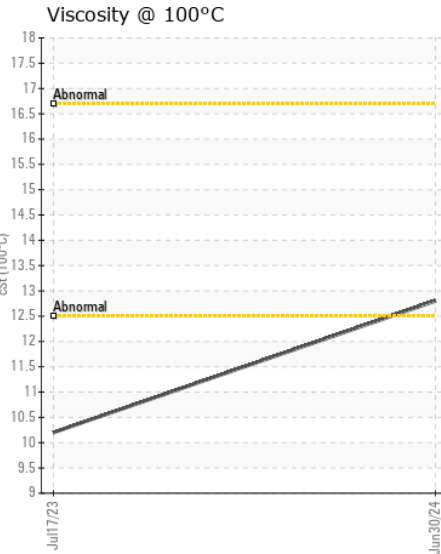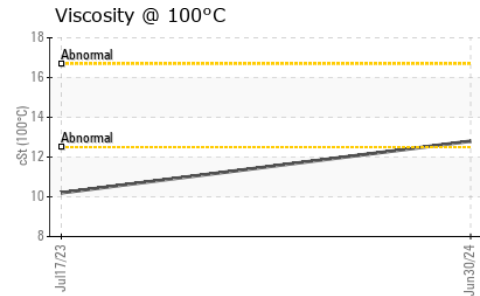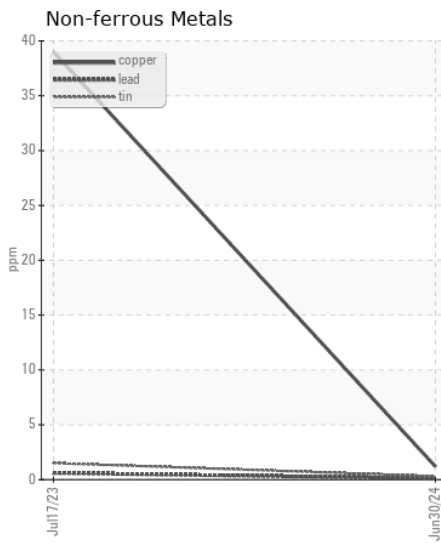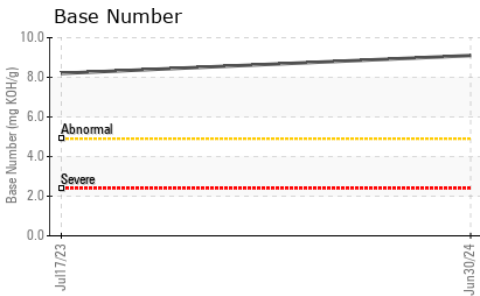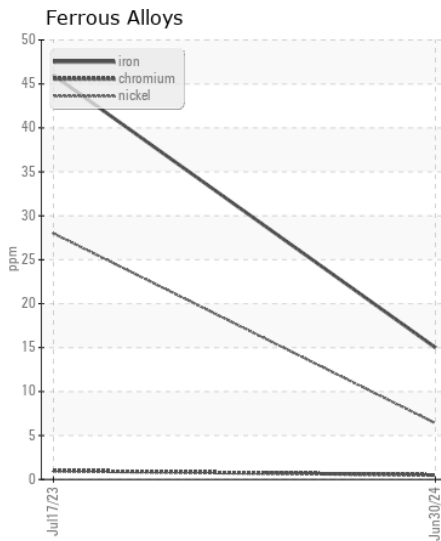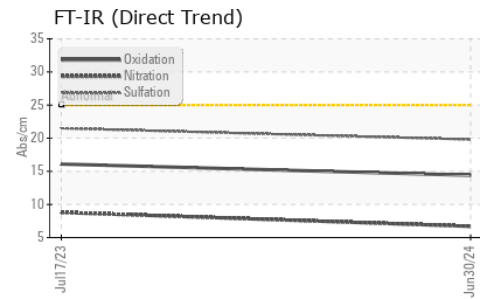

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0223149 **Received** : 01 Jul 2024
Lab Number : 06224314 **Tested** : 02 Jul 2024
Unique Number : 11102511 **Diagnosed** : 02 Jul 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: KV40, TBN)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409
 Contact: NICK GALLAHER
 NGALLAHER@JRENET.COM
 T: (336)668-2762
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)