



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
929083-260354
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (12 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0118214	GFL0118198	GFL0118231
Sample Date		Client Info		17 Jun 2024	30 May 2024	02 May 2024
Machine Age	mls	Client Info		14782	14637	149237
Oil Age	mls	Client Info		700	700	150
Filter Age	mls	Client Info		700	700	0
Oil Changed		Client Info		Changed	Not Changed	N/A
Filter Changed		Client Info		Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	7	20	4
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	1	2	2
Lead	ppm	ASTM D5185m	>40	1	<1	<1
Copper	ppm	ASTM D5185m	>330	<1	<1	1
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	6	4	3
Potassium	ppm	ASTM D5185m	>20	0	4	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	1.1	0.3
Nitration	Abs/cm	*ASTM D7624	>20	7.1	8.0	6.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.1	19.4	18.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	5	3
Boron	ppm	ASTM D5185m	0	18	0	2
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	58	58	59
Manganese	ppm	ASTM D5185m	0	<1	0	<1
Magnesium	ppm	ASTM D5185m	1010	1006	891	955
Calcium	ppm	ASTM D5185m	1070	1217	1043	1095
Phosphorus	ppm	ASTM D5185m	1150	1134	1023	1117
Zinc	ppm	ASTM D5185m	1270	1381	1194	1283
Sulfur	ppm	ASTM D5185m	2060	4061	3222	3658
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	14.1	14.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.4	8.6	8.5
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	13.6	13.8


FT-IR (Direct Trend)

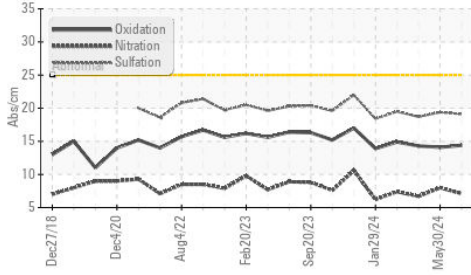


Ferrous Alloys

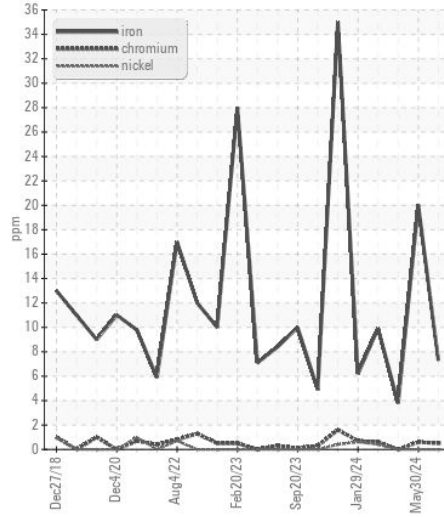


Non-ferrous Metals

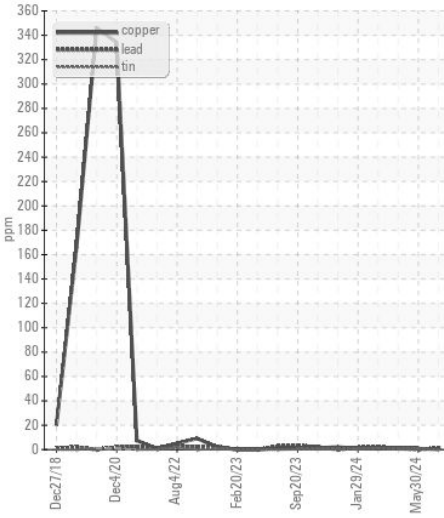


Base Number

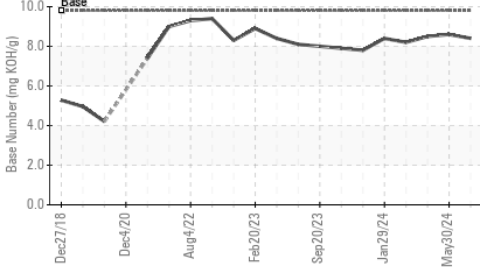


Viscosity @ 100°C

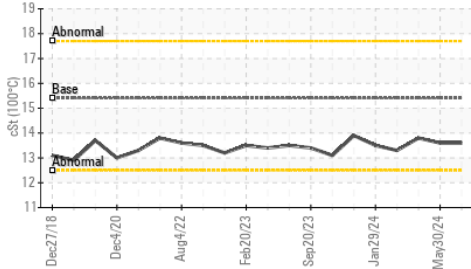

Viscosity @ 100°C

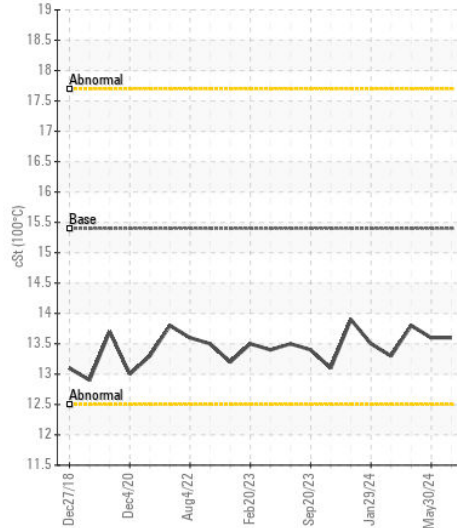

Base Number

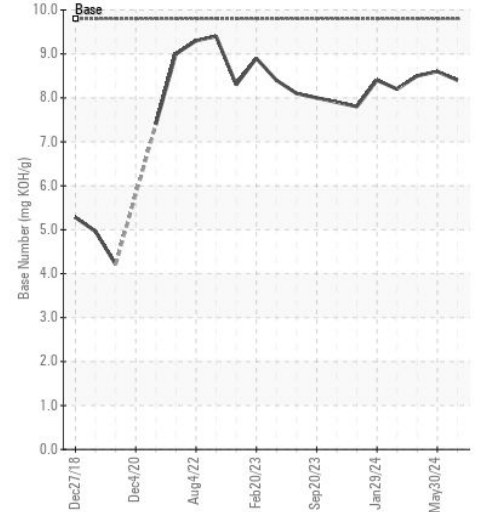

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0118214 **Received** : 01 Jul 2024
Lab Number : 06224356 **Tested** : 02 Jul 2024
Unique Number : 11102553 **Diagnosed** : 02 Jul 2024 - Jonathan Hester
Test Package : FLEET

GFL Environmental - 822 - Springfield Hauling
 2120 West Bennett Street
 Springfield, MO
 US 65807
 Contact: Dennis Moore
 dennis.moore@gflenv.com
 T: (417)403-3641
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)