



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

[H&M QUALITY]

Machine Id
JOHN DEERE 748L PM151063 (S/N 717590)

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0177109	---	---
Sample Date		Client Info		24 Jun 2024	---	---
Machine Age	hrs	Client Info		553	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	7	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	3	---	---
Lead	ppm	ASTM D5185m	>26	0	---	---
Copper	ppm	ASTM D5185m	>26	<1	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	8	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Fuel		WC Method	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	2	---	---
Boron	ppm	ASTM D5185m		139	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		226	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		823	---	---
Calcium	ppm	ASTM D5185m		1423	---	---
Phosphorus	ppm	ASTM D5185m		890	---	---
Zinc	ppm	ASTM D5185m		1072	---	---
Sulfur	ppm	ASTM D5185m		3493	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.7	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	16.7	---	---

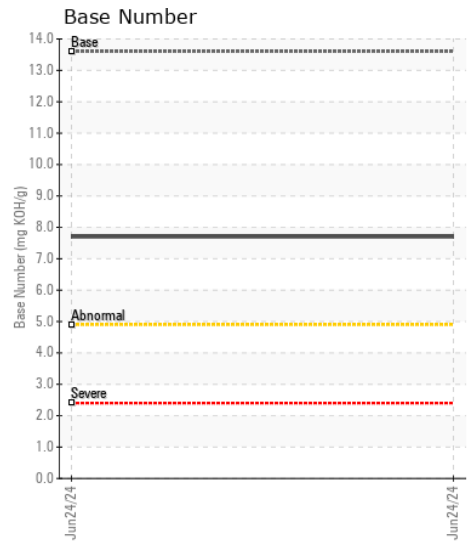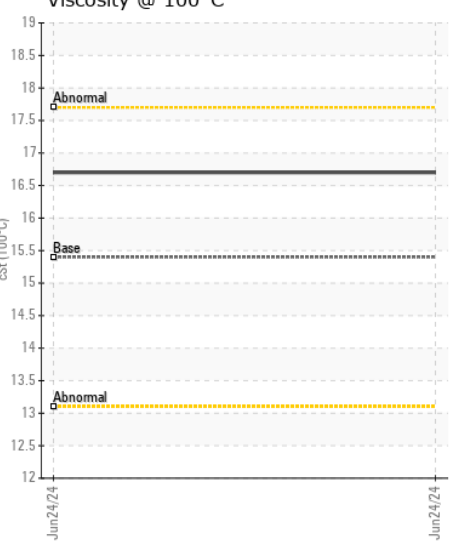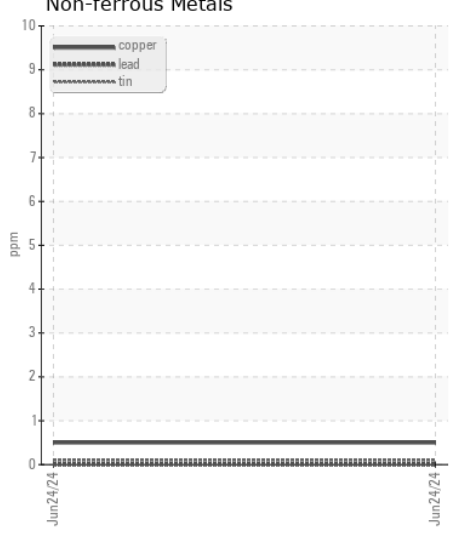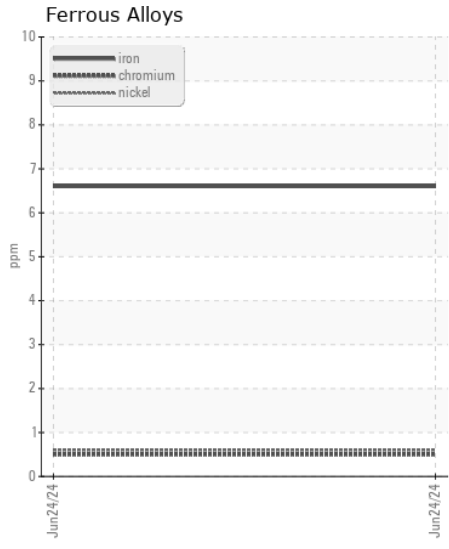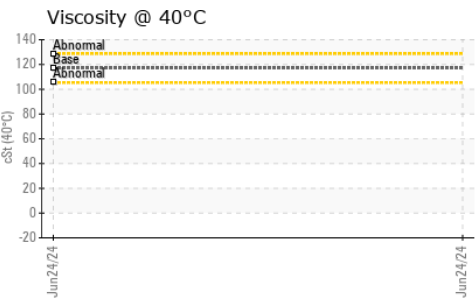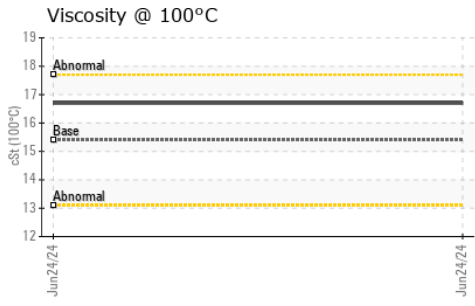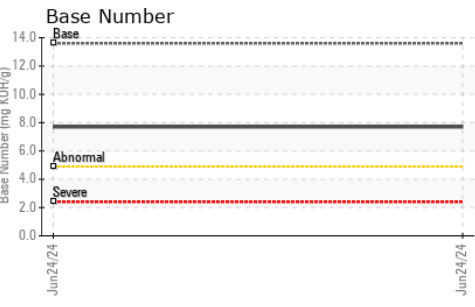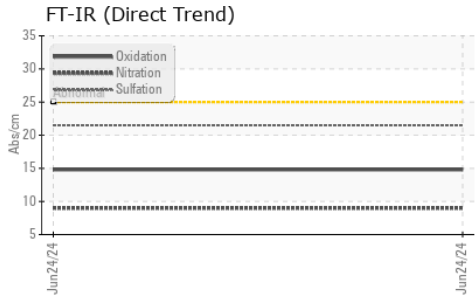

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0177109 **Received** : 01 Jul 2024
Lab Number : 06224401 **Tested** : 02 Jul 2024
Unique Number : 11102598 **Diagnosed** : 02 Jul 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: KV40, TBN)

JRE - MOUNT GILEAD
 305 NORTH MAIN STREET
 MOUNT GILEAD, NC
 US 27306
 Contact: TIM ELSWORTH
 telsworth@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (910)439-5653
 F: (910)439-4568