



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 624P 1DW624PAAMLZ12591

Component
Hydraulic System

Fluid
{not provided} (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0213651	JR0187159	JR0121993
Sample Date		Client Info		30 Jun 2024	11 Oct 2023	13 Feb 2023
Machine Age	hrs	Client Info		4471	3154	2226
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

The chromium level is abnormal. All other component wear rates are normal.

Test	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		20	13	15
Iron	ppm	ASTM D5185m	>20	4	3	3
Chromium	ppm	ASTM D5185m	>10	▲ 13	8	5
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	1	0	0
Lead	ppm	ASTM D5185m	>10	1	0	<1
Copper	ppm	ASTM D5185m	>75	0	<1	<1
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	2	1	1
Potassium	ppm	ASTM D5185m	>20	4	3	3
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	2092	3614	754
Particles >6µm		ASTM D7647	>1300	313	94	166
Particles >14µm		ASTM D7647	>160	34	13	18
Particles >21µm		ASTM D7647	>40	9	5	4
Particles >38µm		ASTM D7647	>10	0	1	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/15/12	19/14/11	17/15/11
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	3	1
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	2
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		0	1	2
Calcium	ppm	ASTM D5185m		85	84	87
Phosphorus	ppm	ASTM D5185m		673	612	609
Zinc	ppm	ASTM D5185m		883	843	825
Sulfur	ppm	ASTM D5185m		1946	1634	1684
Acid Number (AN)	mg KOH/g	ASTM D8045		0.63	0.53	0.48
Visc @ 40°C	cSt	ASTM D445		56.3	57.4	58.2




▲ Ferrous Alloys

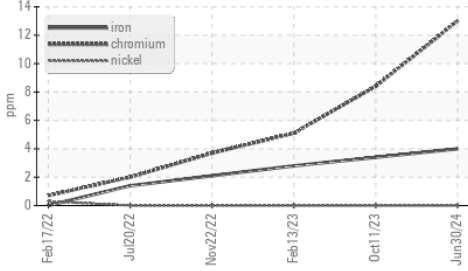



▲ Ferrous Alloys

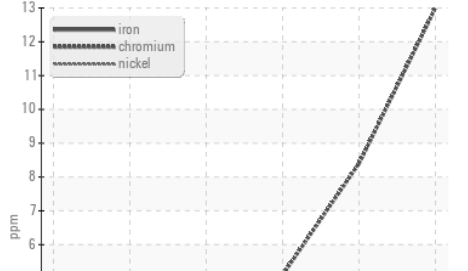


Particle Count

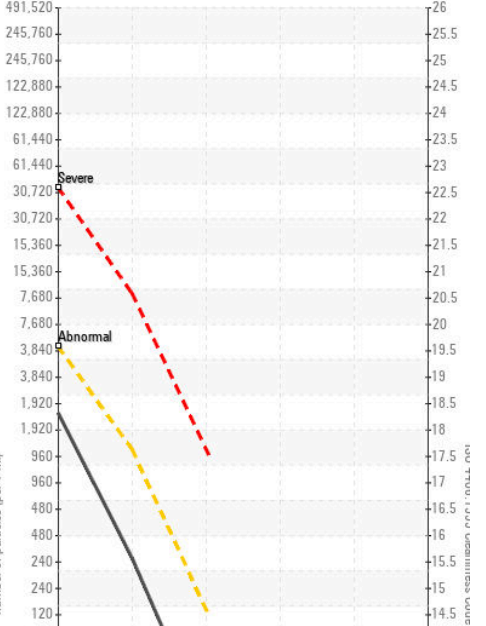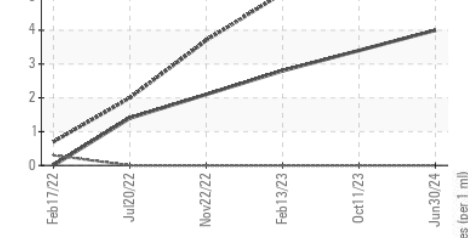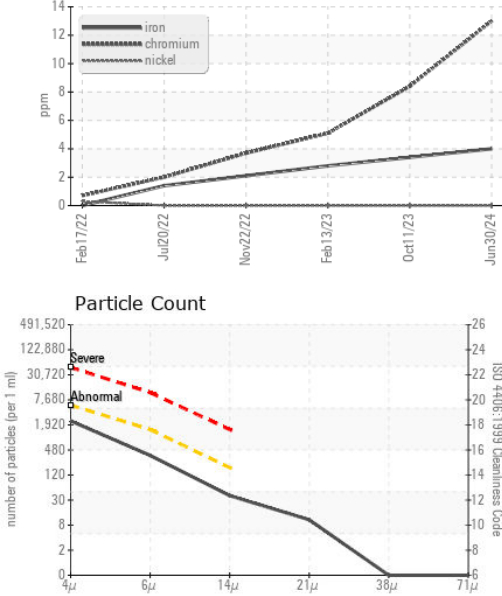



Non-ferrous Metals

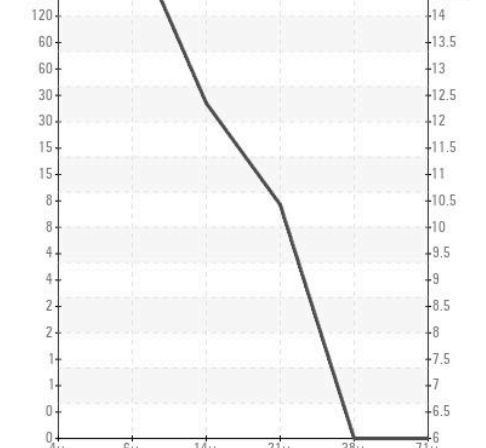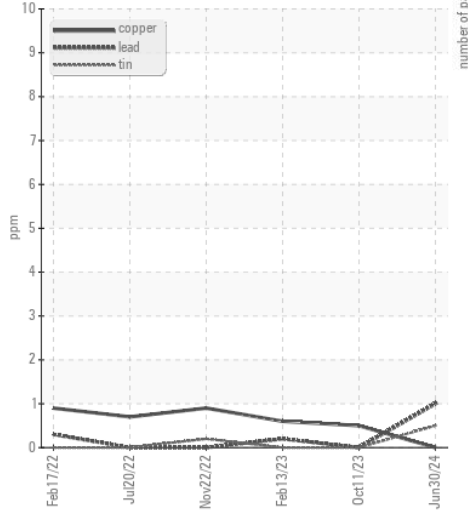


Acid Number

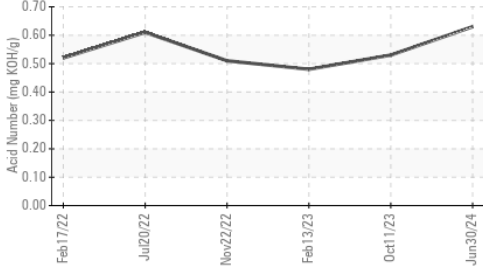


Viscosity @ 40°C

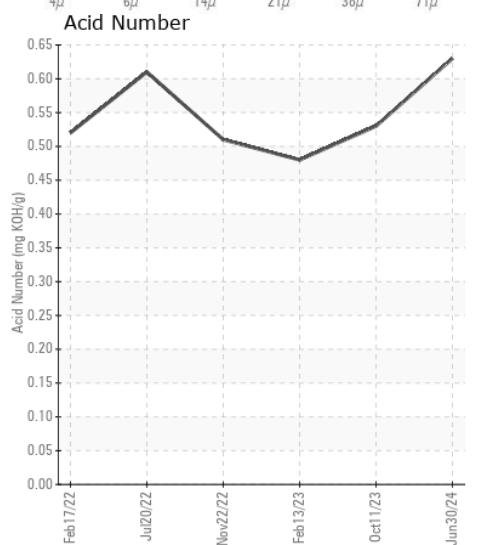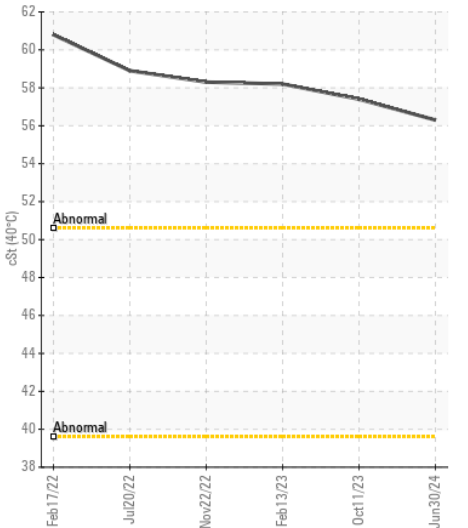

Viscosity @ 40°C

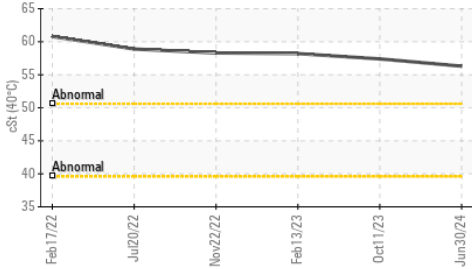

PQ

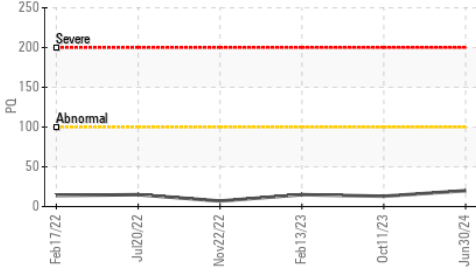

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0213651 **Received** : 01 Jul 2024
Lab Number : 06224435 **Tested** : 02 Jul 2024
Unique Number : 11102632 **Diagnosed** : 02 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409
 Contact: NICK GALLAHER
 NGALLAHER@JRENET.COM
 T: (336)668-2762
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)