



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[HERC RENTALS]**  
 Machine Id  
**VOLVO ECR145 315949**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP444125</b>	---	---
Sample Date		Client Info		<b>24 Jun 2024</b>	---	---
Machine Age	hrs	Client Info		<b>863</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Chngd</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>25	<b>2</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Copper	ppm	ASTM D5185m	>150	<b>36</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION










The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>8</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Particles >4µm		ASTM D7647	>40000	<b>7076</b>	---	---
Particles >6µm		ASTM D7647	>10000	<b>1805</b>	---	---
Particles >14µm		ASTM D7647	>2500	<b>187</b>	---	---
Particles >21µm		ASTM D7647	>640	<b>39</b>	---	---
Particles >38µm		ASTM D7647	>160	<b>2</b>	---	---
Particles >71µm		ASTM D7647	>40	<b>1</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>22/20/18	<b>20/18/15</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Boron	ppm	ASTM D5185m	5	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	5	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	5	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	25	<b>0</b>	---	---
Calcium	ppm	ASTM D5185m	200	<b>188</b>	---	---
Phosphorus	ppm	ASTM D5185m	300	<b>444</b>	---	---
Zinc	ppm	ASTM D5185m	370	<b>591</b>	---	---
Sulfur	ppm	ASTM D5185m	2500	<b>1295</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	<b>0.57</b>	---	---
Visc @ 40°C	cSt	ASTM D445	46	<b>43.2</b>	---	---

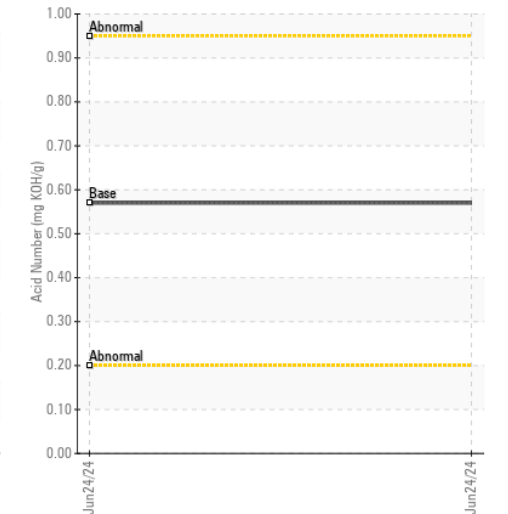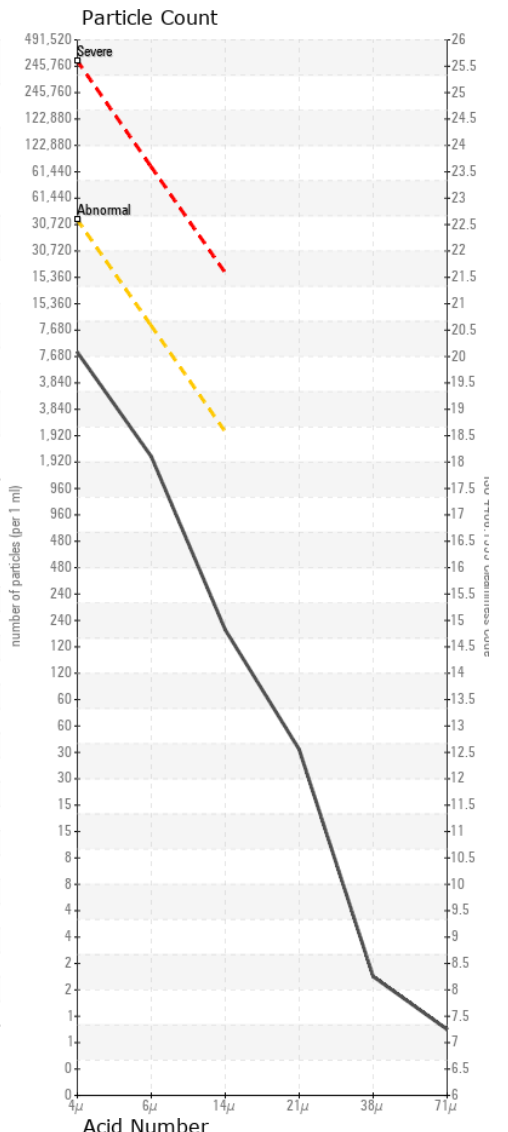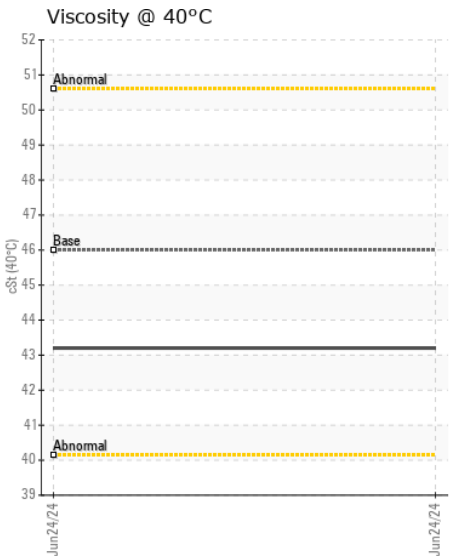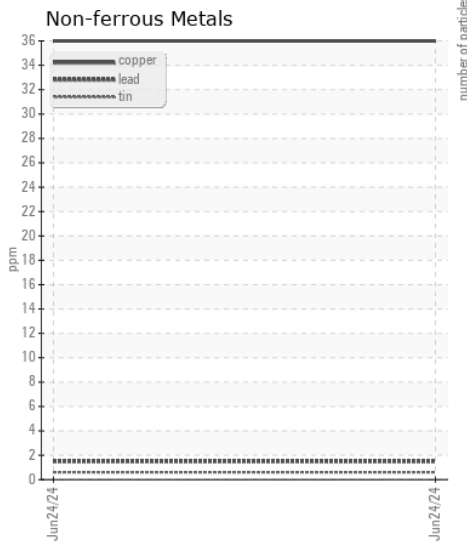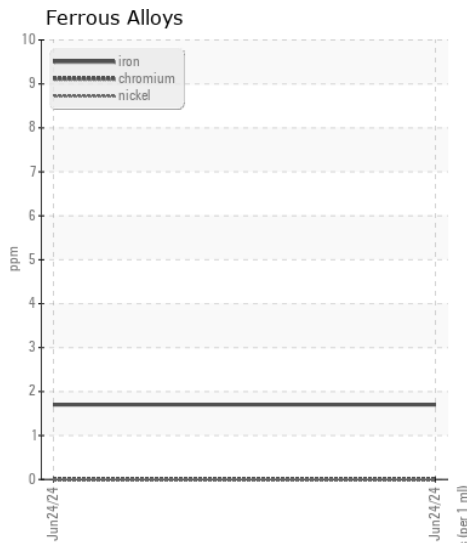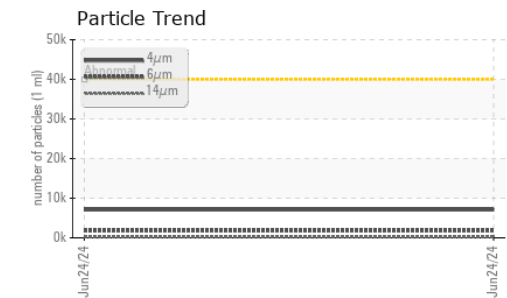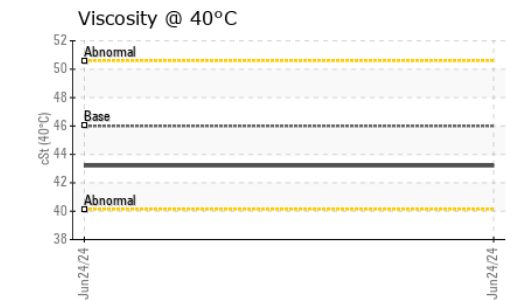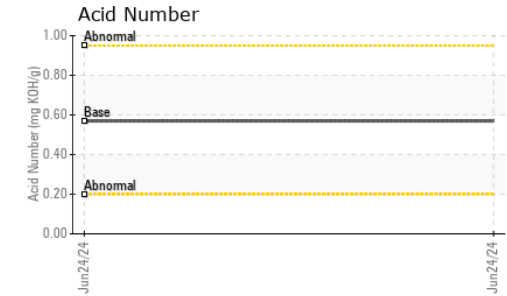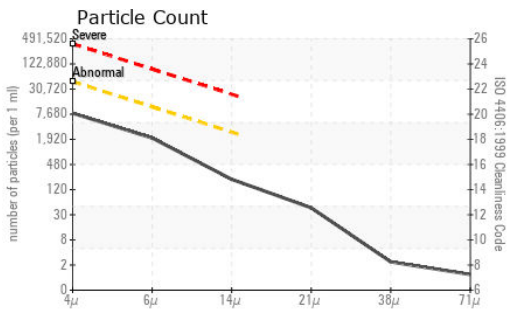

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP444125  
**Lab Number** : 06224465  
**Unique Number** : 11102662  
**Test Package** : MOB 2

**Received** : 01 Jul 2024  
**Tested** : 02 Jul 2024  
**Diagnosed** : 02 Jul 2024 - Don Baldridge

**ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC**  
 8418 PALM RIVER ROAD  
 TAMPA, FL  
 US 33619  
 Contact: KENNY HANEY  
 khaney@flaglerce.com  
 T: (813)630-0077  
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)