



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH T880 ST26 (S/N 137492)
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL 10W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HPL0004959	HPL0002465	HPL0002431
Sample Date		Client Info		26 Jun 2024	06 Oct 2023	29 Sep 2023
Machine Age	hrs	Client Info		15849	14926	14957
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	31	6	30
Chromium	ppm	ASTM D5185m	>20	1	<1	1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	9	10	4
Lead	ppm	ASTM D5185m	>40	5	2	3
Copper	ppm	ASTM D5185m	>330	3	<1	6
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION


There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	12	11	12
Potassium	ppm	ASTM D5185m	>20	4	2	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.1	0.4
Nitration	Abs/cm	*ASTM D7624	>20	15.9	8.5	14.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	41.6	36.9	39.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	<1	2
Boron	ppm	ASTM D5185m	250	<1	0	0
Barium	ppm	ASTM D5185m	10	2	<1	0
Molybdenum	ppm	ASTM D5185m	100	593	576	625
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	450	1017	943	1051
Calcium	ppm	ASTM D5185m	3000	2696	2431	2725
Phosphorus	ppm	ASTM D5185m	1150	1074	1079	1114
Zinc	ppm	ASTM D5185m	1350	1373	1218	1374
Sulfur	ppm	ASTM D5185m	4250	8300	8966	8043
Oxidation	Abs/.1mm	*ASTM D7414	>25	43.6	38.7	41.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	13.61	15.93	13.94
Visc @ 100°C	cSt	ASTM D445	14.4	14.5	13.9	14.4

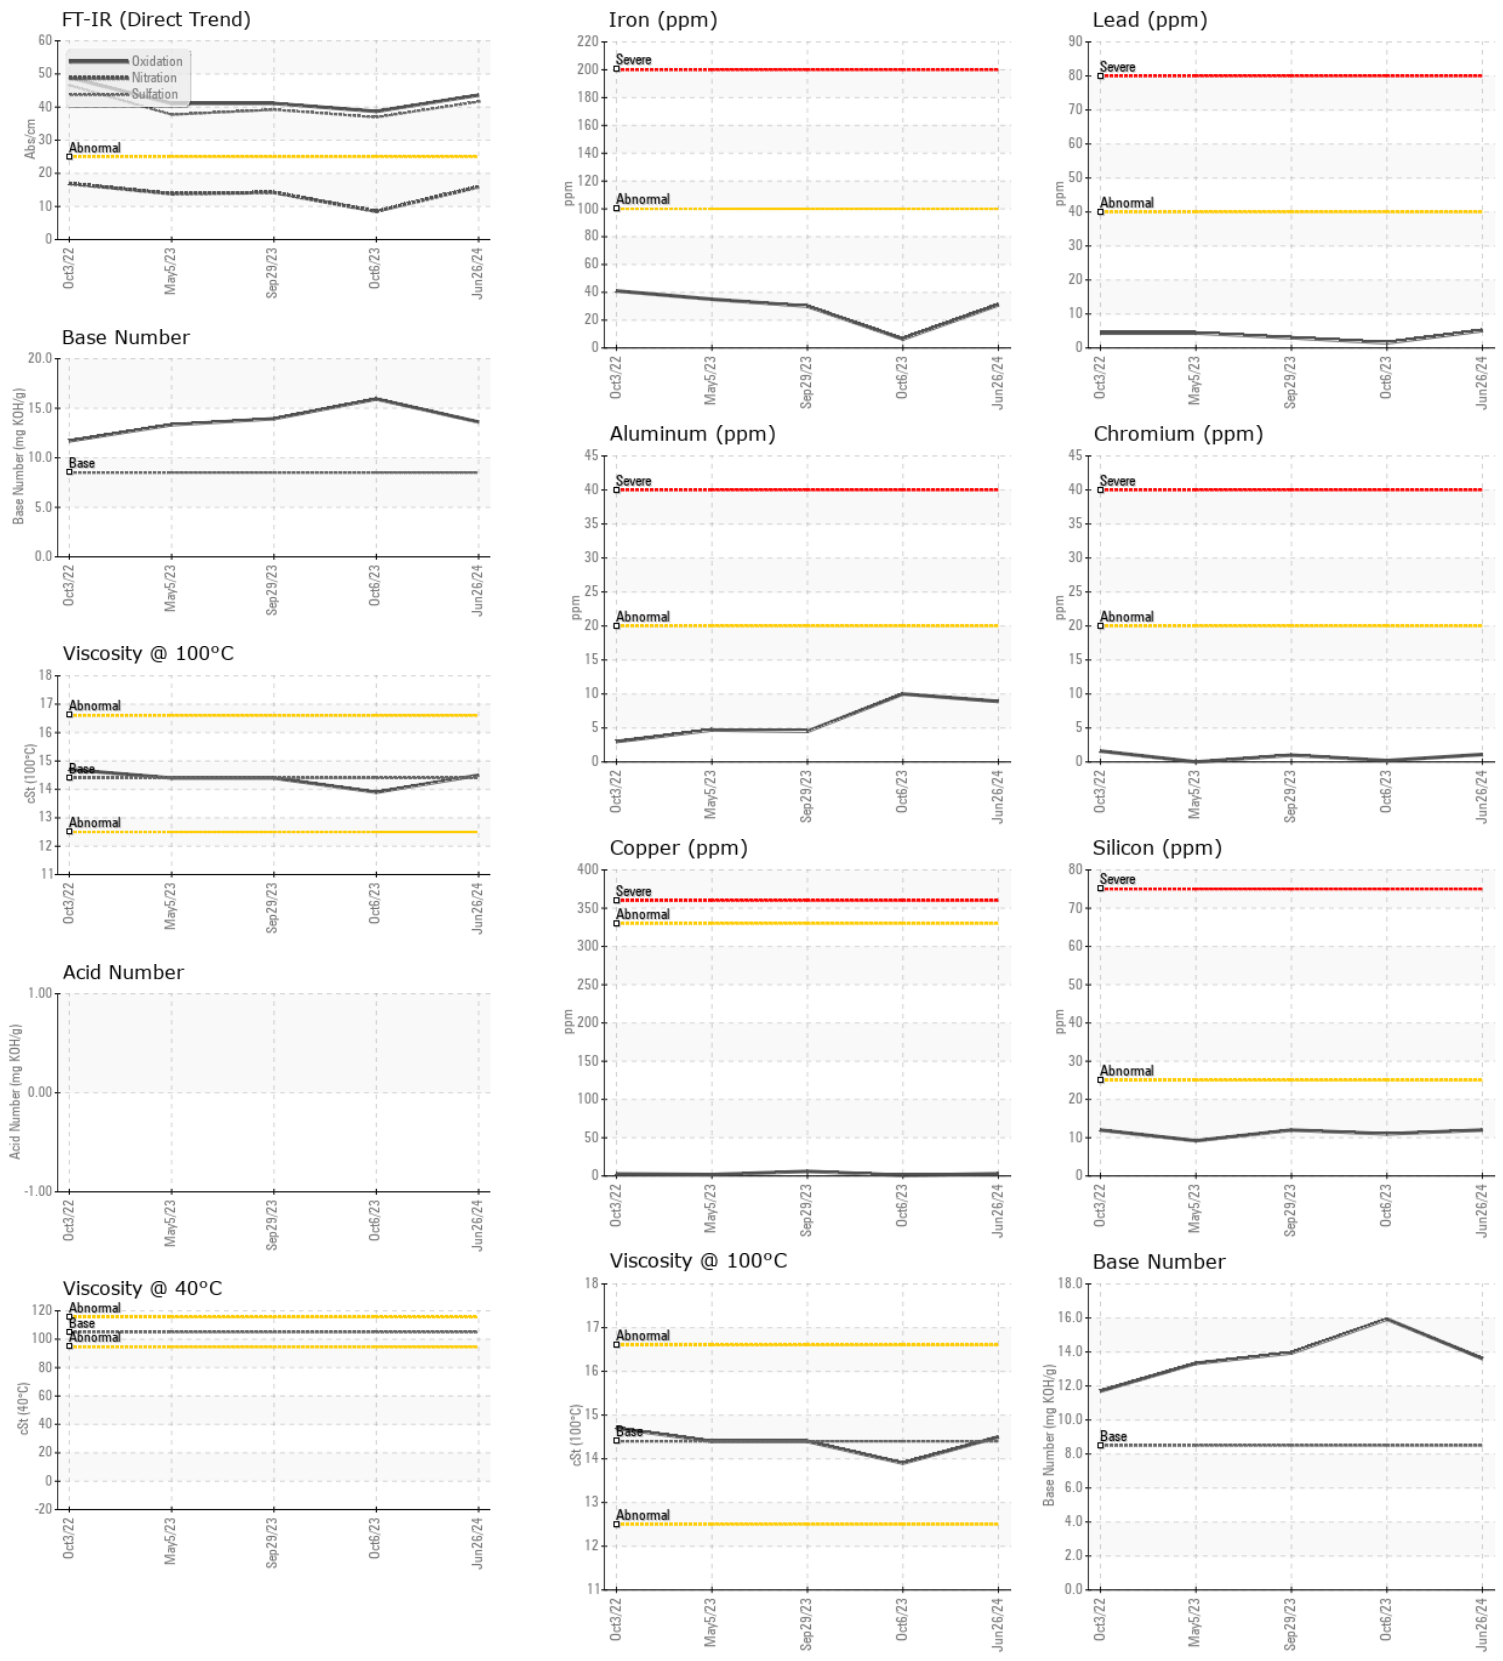

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HPL0004959 **Received** : 01 Jul 2024
Lab Number : 06224681 **Tested** : 03 Jul 2024
Unique Number : 11102878 **Diagnosed** : 03 Jul 2024 - Angela Borella
Test Package : MOB 2 (Additional Tests: KV40, TAN Man)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

STEVENS ON CRANE
 410 STEVENSON DR
 BOLINGBROOK, IL
 US 60440
 Contact: DAVE KOEHNE
 davidk@stevensoncrane.com
 T: (630)972-9199
 F: