



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JLG 450AJ PL9091 (S/N 300169091)
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL 10W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HPL0004956	HPL0002930	---
Sample Date		Client Info		26 Jun 2024	28 Jun 2023	---
Machine Age	hrs	Client Info		1981	1900	---
Oil Age	hrs	Client Info		0	580	---
Filter Age	hrs	Client Info		0	580	---
Oil Changed		Client Info		N/A	Changed	---
Filter Changed		Client Info		N/A	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	24	28	---
Chromium	ppm	ASTM D5185m	>20	1	1	---
Nickel	ppm	ASTM D5185m	>4	<1	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	25	9	---
Lead	ppm	ASTM D5185m	>40	1	<1	---
Copper	ppm	ASTM D5185m	>330	3	3	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	16	13	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	15.2	14.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	40.6	35.6	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	4	---
Boron	ppm	ASTM D5185m	250	18	86	---
Barium	ppm	ASTM D5185m	10	2	0	---
Molybdenum	ppm	ASTM D5185m	100	562	531	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m	450	944	809	---
Calcium	ppm	ASTM D5185m	3000	2899	3368	---
Phosphorus	ppm	ASTM D5185m	1150	1077	1056	---
Zinc	ppm	ASTM D5185m	1350	1372	1291	---
Sulfur	ppm	ASTM D5185m	4250	9132	12475	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	44.1	36.5	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	16.05	17.58	---
Visc @ 100°C	cSt	ASTM D445	14.4	15.2	14.7	---

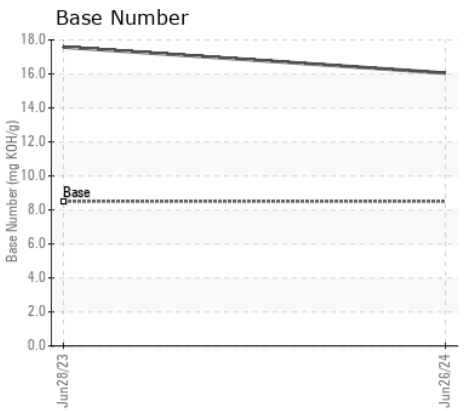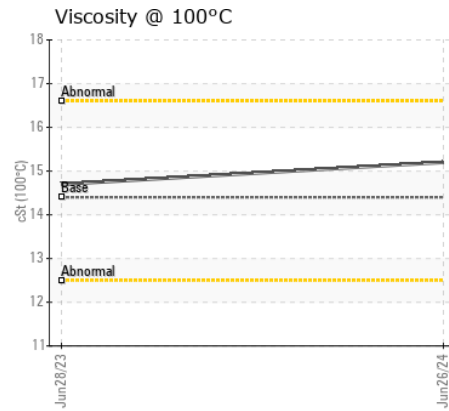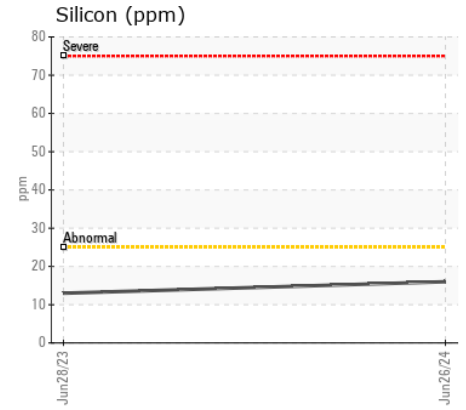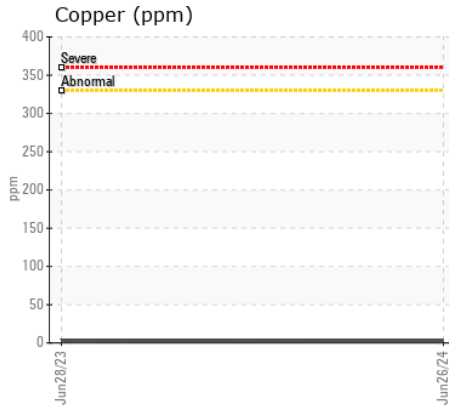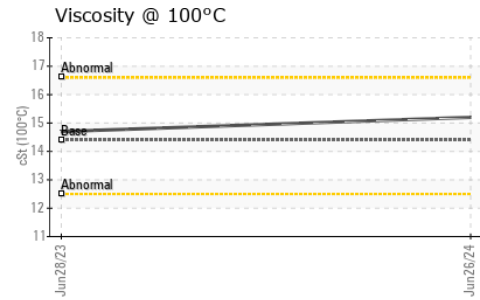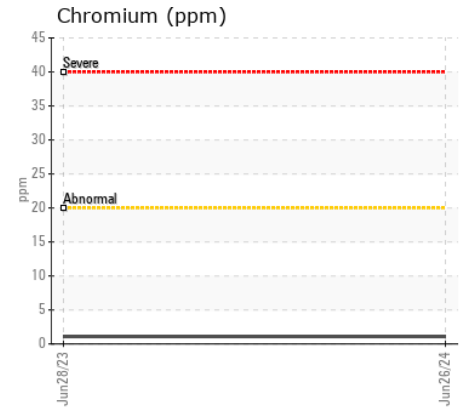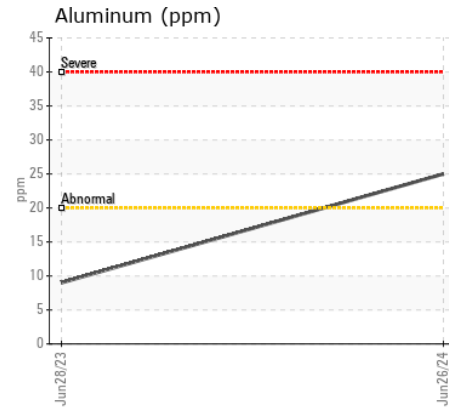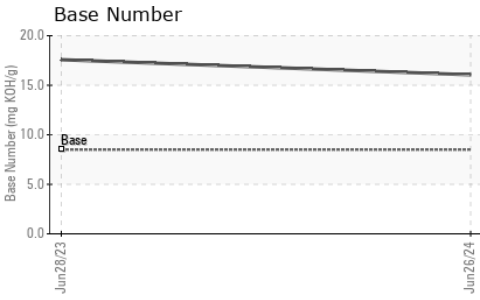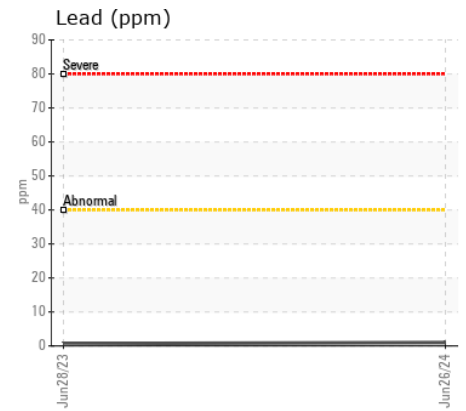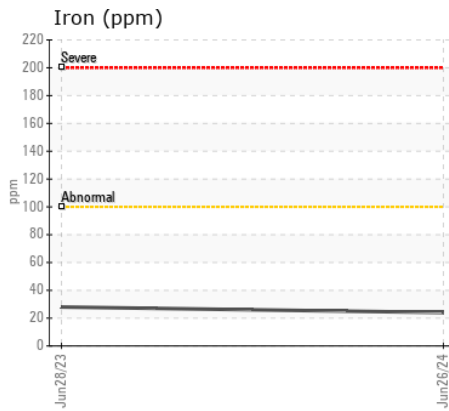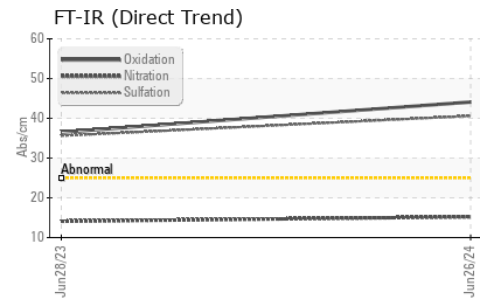

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : HPL0004956

Lab Number : 06224682

Unique Number : 11102879

Test Package : MOB 2

Received : 01 Jul 2024

Tested : 02 Jul 2024

Diagnosed : 03 Jul 2024 - Angela Borella

STEVENS ON CRANE

410 STEVENSON DR

BOLINGBROOK, IL

US 60440

Contact: DAVE KOEHNE

davidk@stevensoncrane.com

T: (630)972-9199

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)