



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[05W47813]**

Machine Id

**JOHN DEERE 410L 1T0410LXLKF350838**

Component

**Rear Differential**

Fluid

**JOHN DEERE HY-GARD HYD/TRANS (5 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0225709</b>	JR0160164	---
Sample Date		Client Info		<b>28 Jun 2024</b>	31 Jan 2023	---
Machine Age	hrs	Client Info		<b>2167</b>	1290	---
Oil Age	hrs	Client Info		<b>2167</b>	1290	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal for time on oil.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>315</b>	210	---
Iron	ppm	ASTM D5185m	>500	<b>1562</b>	1312	---
Chromium	ppm	ASTM D5185m	>10	<b>8</b>	6	---
Nickel	ppm	ASTM D5185m	>10	<b>4</b>	3	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	2	---
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	1	---
Copper	ppm	ASTM D5185m	>100	<b>39</b>	30	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	2	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>24</b>	20	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	0	---
Water		WC Method	>.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>MODER</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>5</b>	6	---
Boron	ppm	ASTM D5185m	6	<b>11</b>	6	---
Barium	ppm	ASTM D5185m	0	<b>5</b>	3	---
Molybdenum	ppm	ASTM D5185m	0	<b>2</b>	2	---
Manganese	ppm	ASTM D5185m		<b>16</b>	13	---
Magnesium	ppm	ASTM D5185m	145	<b>102</b>	100	---
Calcium	ppm	ASTM D5185m	3570	<b>3443</b>	3361	---
Phosphorus	ppm	ASTM D5185m	1290	<b>985</b>	897	---
Zinc	ppm	ASTM D5185m	1640	<b>1139</b>	1061	---
Sulfur	ppm	ASTM D5185m		<b>3216</b>	3592	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>51.5</b>	52.4	---

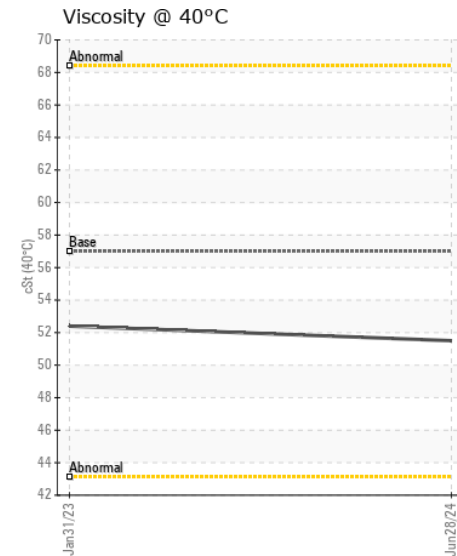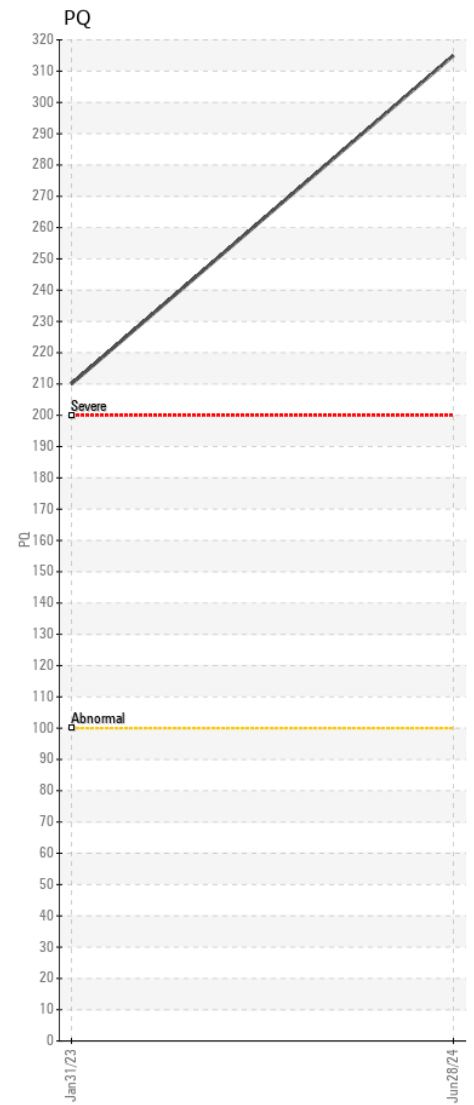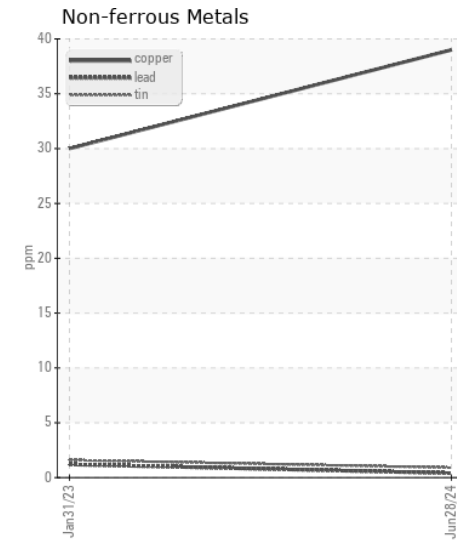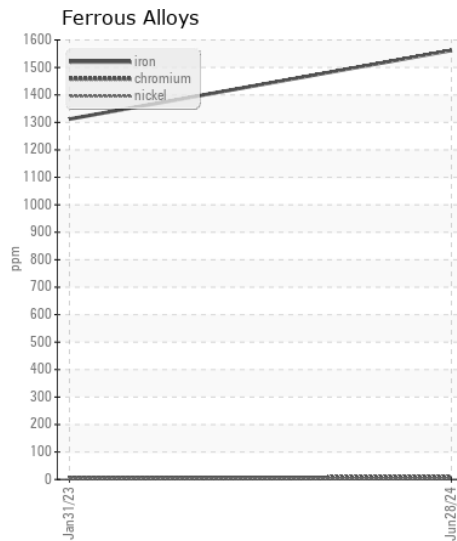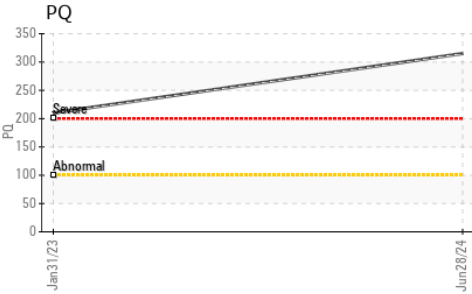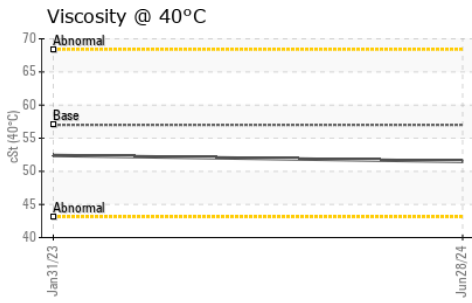

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0225709 **Received** : 01 Jul 2024  
**Lab Number** : 06224731 **Tested** : 02 Jul 2024  
**Unique Number** : 11102928 **Diagnosed** : 02 Jul 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - MANASSAS PARK**  
 9107 OWENS DRIVE  
 MANASSAS PARK, VA  
 US 20111

Contact: DON VEST  
 dvest@jamesriverequipment.com  
 T: (703)631-8500  
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)