



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 410E 1DW410EBVMF708949**  
Component  
**Rear Differential**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (18 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0220082</b>	JR0206576	JR0193444
Sample Date		Client Info		<b>25 Jun 2024</b>	06 Mar 2024	29 Nov 2023
Machine Age	hrs	Client Info		<b>5493</b>	5006	4623
Oil Age	hrs	Client Info		<b>4442</b>	4338	668
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>N/A</b>	Not Changd	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>15</b>	17	35
Iron	ppm	ASTM D5185m	>500	<b>2</b>	27	9
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	1	<1
Lead	ppm	ASTM D5185m	>25	<b>0</b>	16	<1
Copper	ppm	ASTM D5185m	>100	<b>&lt;1</b>	3	3
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>4</b>	4	2
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	<1
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	3	1
Boron	ppm	ASTM D5185m	6	<b>1</b>	3	<1
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	145	<b>99</b>	89	103
Calcium	ppm	ASTM D5185m	3570	<b>3415</b>	3000	3306
Phosphorus	ppm	ASTM D5185m	1290	<b>1013</b>	982	1055
Zinc	ppm	ASTM D5185m	1640	<b>1236</b>	1158	1269
Sulfur	ppm	ASTM D5185m		<b>3466</b>	3634	3709
Visc @ 40°C	cSt	ASTM D445	57.0	<b>58.4</b>	52.6	53.5

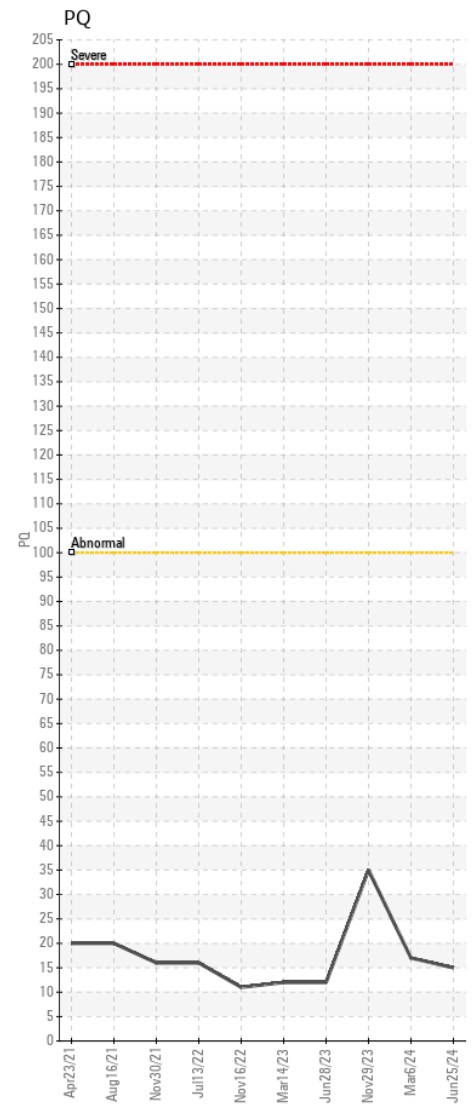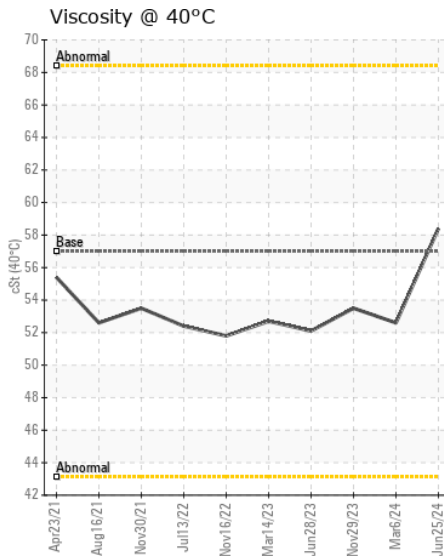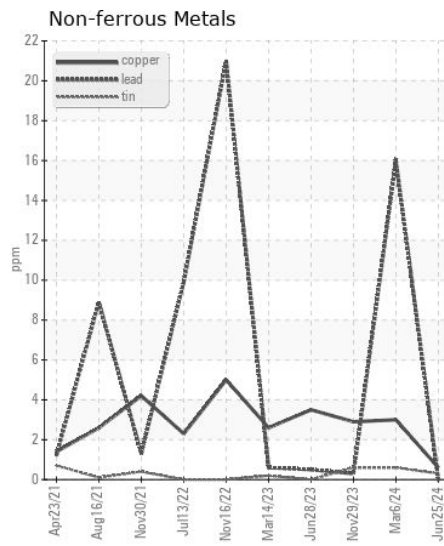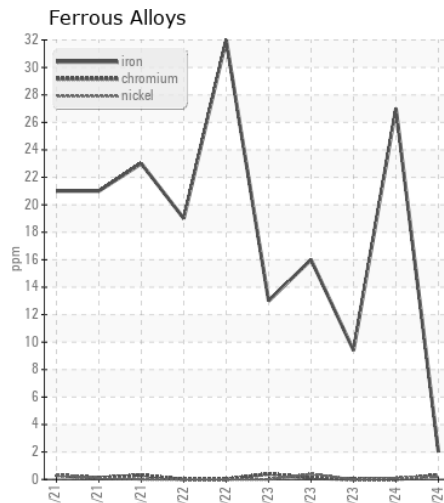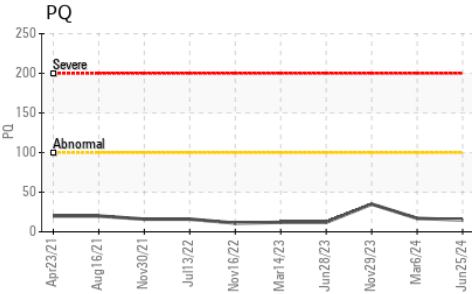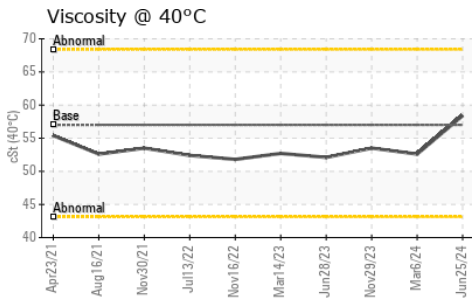

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0220082 **Received** : 01 Jul 2024  
**Lab Number** : 06224800 **Tested** : 02 Jul 2024  
**Unique Number** : 11102997 **Diagnosed** : 02 Jul 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - CHARLOTTE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269  
 Contact: CHARLOTTE SHOP  
 myoung@jamesriverequipment.com  
 T: (704)597-0211  
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)