



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 350G 1FF350GXAMF815211
 Component
Left Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0219644	JR0189096	JR0171411
Sample Date		Client Info		26 Jun 2024	02 Jan 2024	29 Jun 2023
Machine Age	hrs	Client Info		8490	8490	1445
Oil Age	hrs	Client Info		8490	8490	8490
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Changed	Not Chngd
Filter Changed		Client Info		N/A	N/A	Not Chngd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	15	201	183
Iron	ppm	ASTM D5185m	>750	<1	458	231
Chromium	ppm	ASTM D5185m	>9	<1	6	2
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>40	3	1	6
Lead	ppm	ASTM D5185m	>15	<1	0	0
Copper	ppm	ASTM D5185m	>40	<1	2	0
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	2	18	14
Potassium	ppm	ASTM D5185m	>20	2	0	3
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	<1	<1
Boron	ppm	ASTM D5185m		3	50	54
Barium	ppm	ASTM D5185m		<1	3	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		0	8	4
Magnesium	ppm	ASTM D5185m		6	3	0
Calcium	ppm	ASTM D5185m		108	47	17
Phosphorus	ppm	ASTM D5185m		332	491	432
Zinc	ppm	ASTM D5185m		31	31	12
Sulfur	ppm	ASTM D5185m		16835	14080	15028
Visc @ 40°C	cSt	ASTM D445		142	185	187

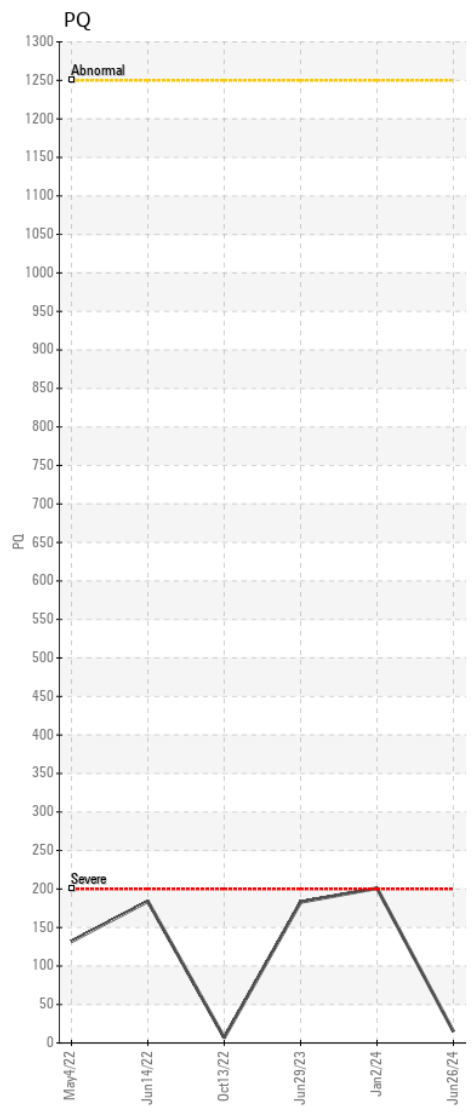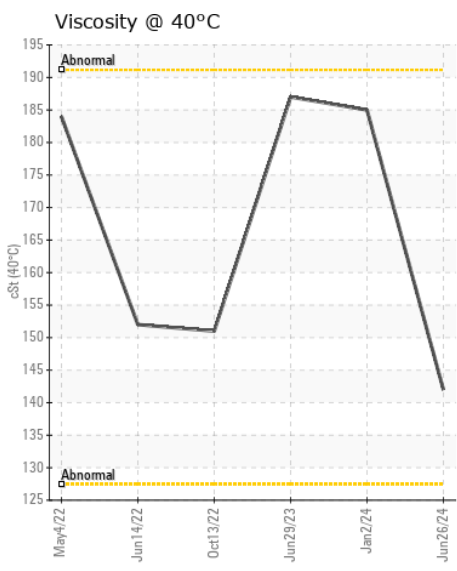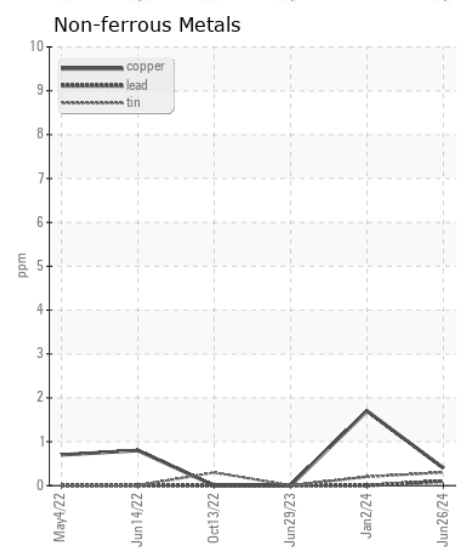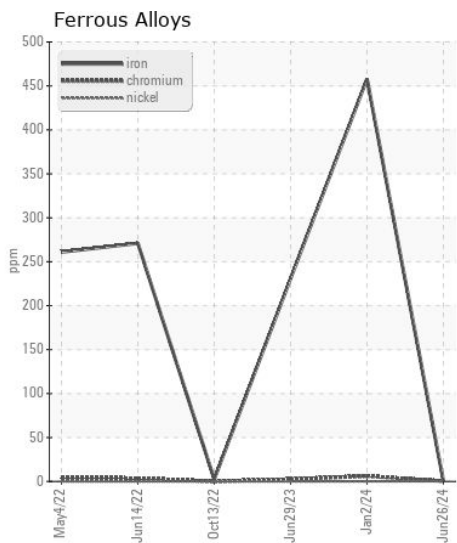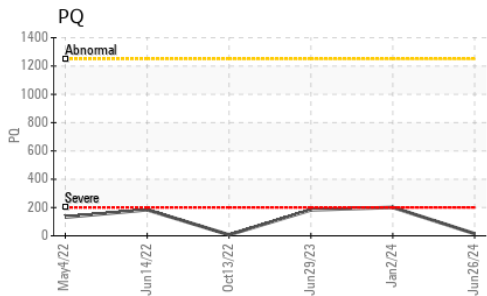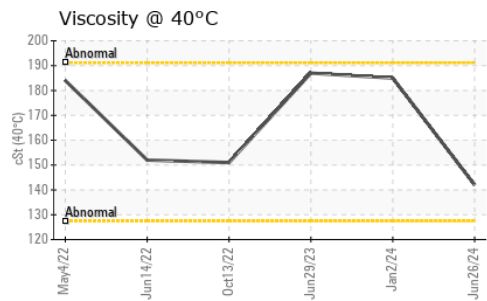

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0219644 **Received** : 01 Jul 2024
Lab Number : 06224801 **Tested** : 02 Jul 2024
Unique Number : 11102998 **Diagnosed** : 02 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)