



ASCENDUM

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
VOLVO 311394
 Component
Left Travel
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0003349	---	---
Sample Date		Client Info		27 Jun 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		3124	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

Gear wear is indicated.

Iron	ppm	ASTM D5185m	>500	▲ 685	---	---
Chromium	ppm	ASTM D5185m	>20	9	---	---
Nickel	ppm	ASTM D5185m	>5	5	---	---
Titanium	ppm	ASTM D5185m		2	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>100	21	---	---
Lead	ppm	ASTM D5185m	>10	<1	---	---
Copper	ppm	ASTM D5185m	>60	3	---	---
Tin	ppm	ASTM D5185m	>5	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>150	109	---	---
Potassium	ppm	ASTM D5185m	>20	7	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	2	---	---
Boron	ppm	ASTM D5185m	400	15	---	---
Barium	ppm	ASTM D5185m	200	2	---	---
Molybdenum	ppm	ASTM D5185m	12	1	---	---
Manganese	ppm	ASTM D5185m		10	---	---
Magnesium	ppm	ASTM D5185m	12	6	---	---
Calcium	ppm	ASTM D5185m	150	26	---	---
Phosphorus	ppm	ASTM D5185m	1650	427	---	---
Zinc	ppm	ASTM D5185m	125	33	---	---
Sulfur	ppm	ASTM D5185m	22500	16548	---	---
Visc @ 40°C	cSt	ASTM D445	143	138	---	---

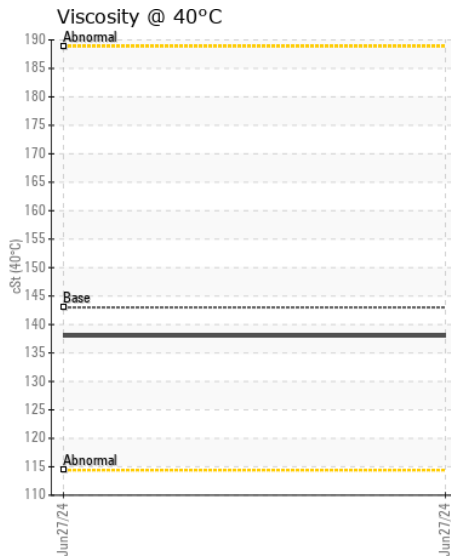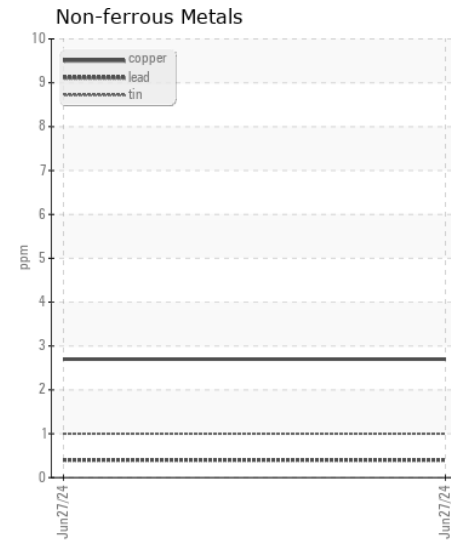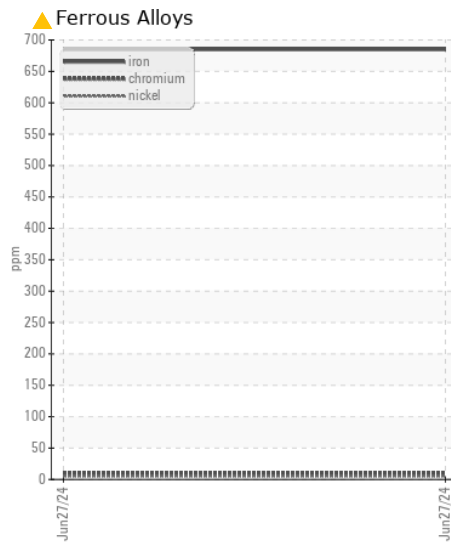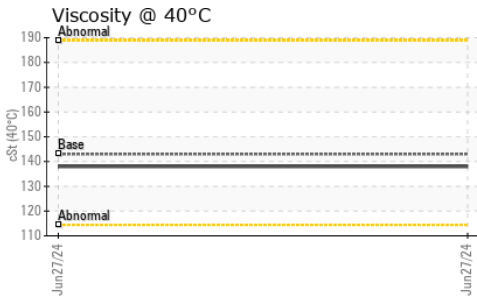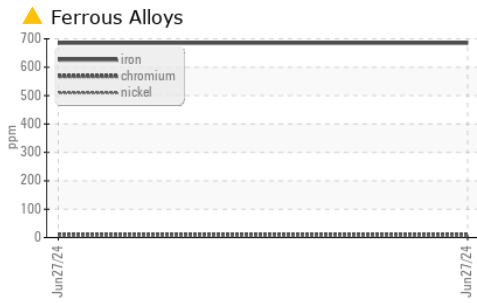

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0003349
Lab Number : 06224906
Unique Number : 11103103
Test Package : CONST

Received : 01 Jul 2024
Tested : 02 Jul 2024
Diagnosed : 02 Jul 2024 - Don Baldrige

160 - ASCENDUM MACHINERY INC - MILLS RIVER
 215 FANNING FIELDS RD
 MILLS RIVER, NC
 US 28759
 Contact: Kendall Rhodes
 kendall.rhodes@ascendummachinery.com
 T:
 F: (828)687-0622

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)