



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ATTENTION</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**(83J3TW)**  
Machine Id  
**229035-632119**  
Component  
**Hydraulic System**  
Fluid  
**PETRO CANADA HYDREX MV 46 (--- GAL)**

**RECOMMENDATION**

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0122855</b>	GFL0108174	---
Sample Date		Client Info		<b>25 Jun 2024</b>	08 Jan 2024	---
Machine Age	hrs	Client Info		<b>11207</b>	10216	---
Oil Age	hrs	Client Info		<b>10216</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Sample Status				<b>ATTENTION</b>	SEVERE	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>75	<b>0</b>	3	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**










There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>2</b>	5	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Particles >4µm		ASTM D7647	>5000	<b>7483</b>	▲ 286429	---
Particles >6µm		ASTM D7647	>1300	<b>1635</b>	▲ 139542	---
Particles >14µm		ASTM D7647	>160	<b>51</b>	▲ 6291	---
Particles >21µm		ASTM D7647	>40	<b>7</b>	▲ 883	---
Particles >38µm		ASTM D7647	>10	<b>0</b>	12	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>20/18/13</b>	▲ 25/24/20	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	0	---
Boron	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	---
Manganese	ppm	ASTM D5185m	1	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	0	<b>13</b>	5	---
Calcium	ppm	ASTM D5185m	50	<b>108</b>	61	---
Phosphorus	ppm	ASTM D5185m	330	<b>381</b>	302	---
Zinc	ppm	ASTM D5185m	430	<b>492</b>	355	---
Sulfur	ppm	ASTM D5185m	760	<b>1209</b>	737	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.70	<b>0.38</b>	0.25	---
Visc @ 40°C	cSt	ASTM D445	45.4	<b>46.0</b>	49.1	---

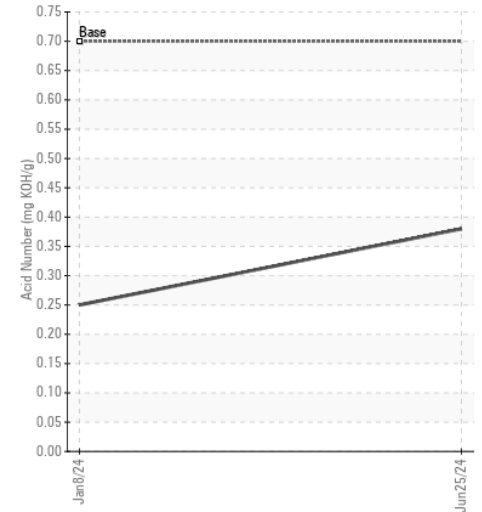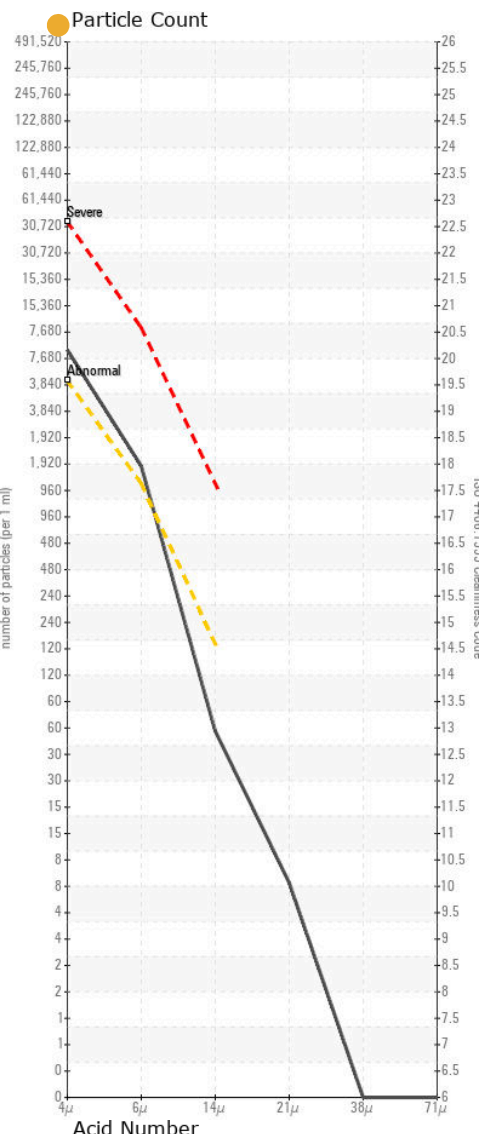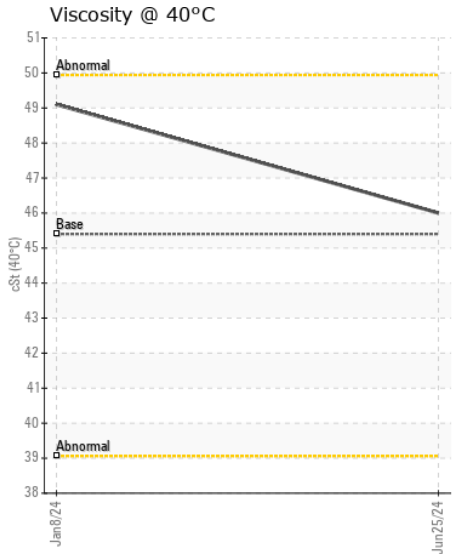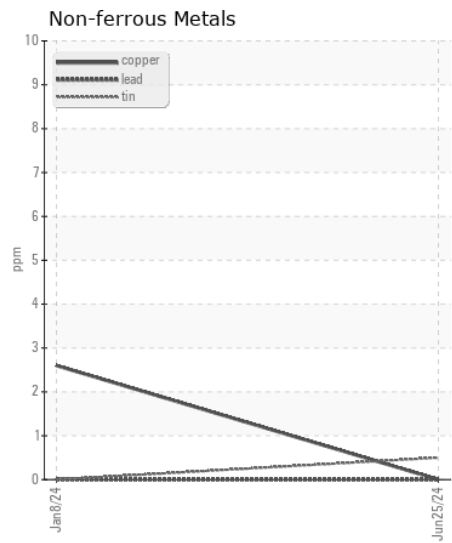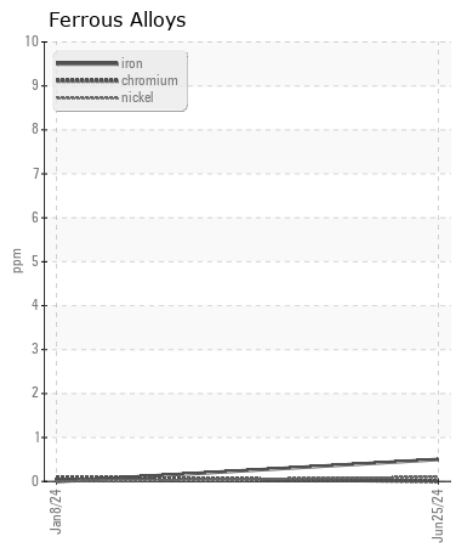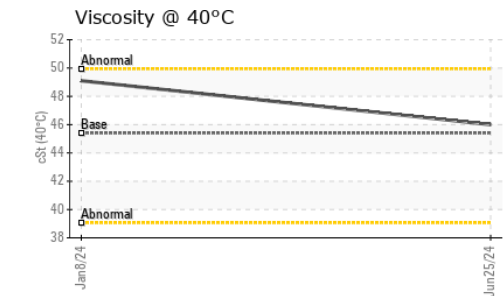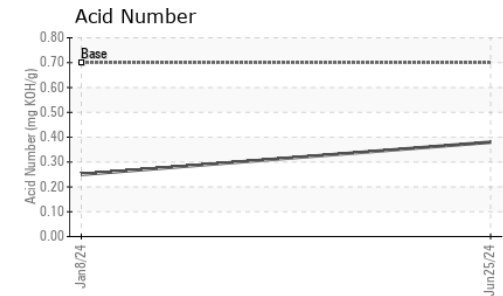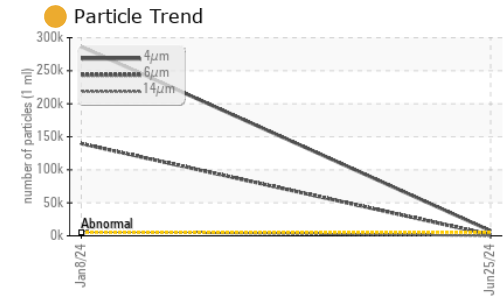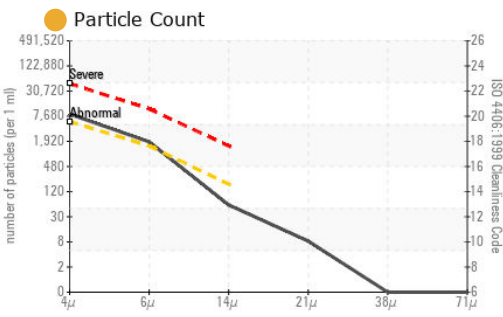

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0122855 **Received** : 01 Jul 2024  
**Lab Number** : 06224998 **Tested** : 02 Jul 2024  
**Unique Number** : 11103195 **Diagnosed** : 02 Jul 2024 - Wes Davis  
**Test Package** : FLEET ( Additional Tests: PrtCount )

**GFL Environmental - 837 - Harrison TS**  
 22820 S State Route 291  
 Harrisonville, MO  
 US 64701  
 Contact: SARA PATRICK  
 spatrick@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)