



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
PALASYN 45
Machine Id
SULLIVAN PALATEK 1403050003 - VALLEY PROTIENS
Component
Compressor

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		UCS06225287	UCS05906789	UCS05791017
Sample Date		Client Info		01 Jul 2024	17 Jul 2023	13 Jan 2023
Machine Age	hrs	Client Info		67613	63132	57950
Oil Age	hrs	Client Info		6000	5182	4794
Filter Age	hrs	Client Info		2000	0	4794
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	<1
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	<1	0
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the component.

Silicon	ppm	ASTM D5185m	>25	<1	1	1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		10	<1	0
Boron	ppm	ASTM D5185m	0.0	0	0	0
Barium	ppm	ASTM D5185m	0.0	9	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m	0	0	<1	<1
Magnesium	ppm	ASTM D5185m	0.0	0	0	<1
Calcium	ppm	ASTM D5185m	0.0	0	0	0
Phosphorus	ppm	ASTM D5185m	966	329	395	467
Zinc	ppm	ASTM D5185m	0	5	0	0
Sulfur	ppm	ASTM D5185m	1309	1524	1349	465
Acid Number (AN)	mg KOH/g	ASTM D8045	0.172	0.16	0.14	0.11
Visc @ 40°C	cSt	ASTM D445	39.9	48.1	44.2	44.8

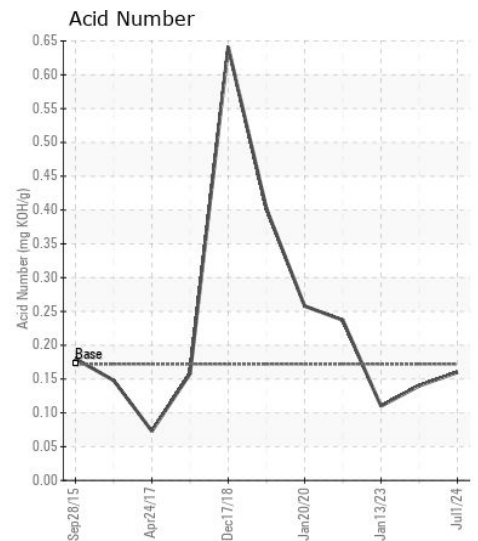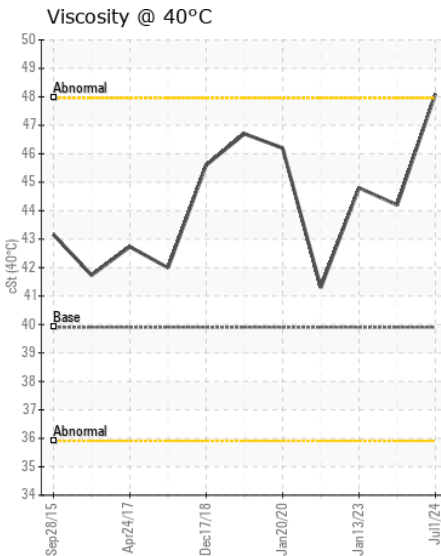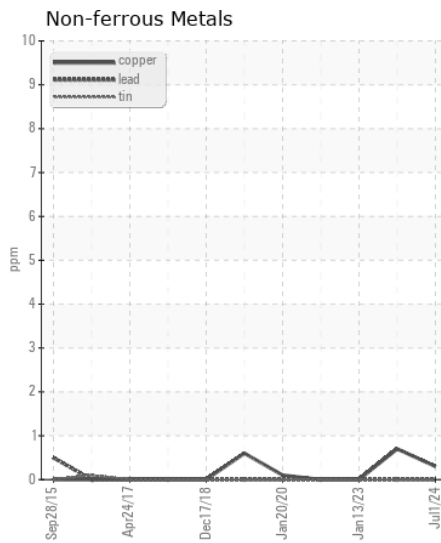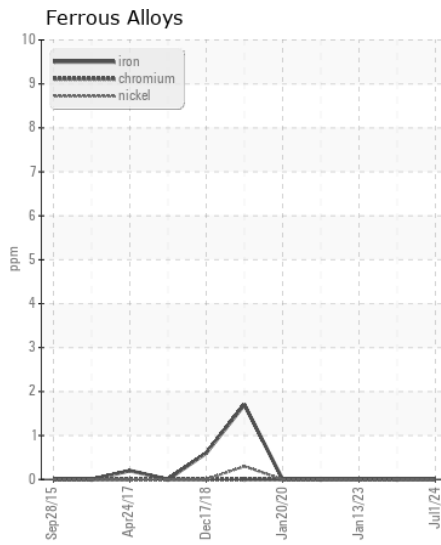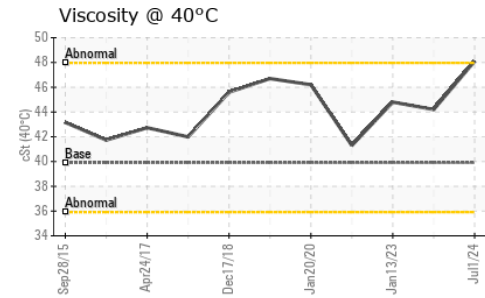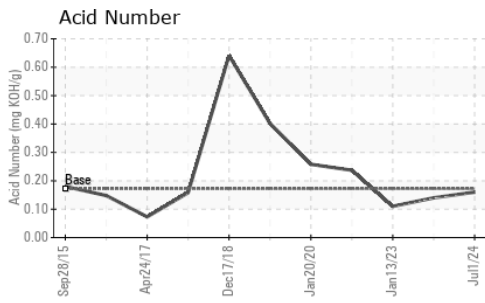

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : UCS06225287

Lab Number : 06225287

Unique Number : 11103484

Test Package : IND 2

Received : 01 Jul 2024

Tested : 02 Jul 2024

Diagnosed : 03 Jul 2024 - Angela Borella

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

C.H. REED INC

301 POPLAR ST

HANOVER, PA

US 17331-2370

Contact: Aimee Morea

aimeemorea@chreed.com

T: (800)813-5463

F: (717)632-6582