



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
DE Samples - CAT LAB
Machine Id
CATERPILLAR 980H LOADER 6583 (S/N JMS05055)
Component
Rear Right Final Drive
Fluid
TULCO LUBSOIL TO-4 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TO10002065	TO10003056	TO10002733
Sample Date		Client Info		22 Jun 2024	08 Jan 2024	02 Oct 2023
Machine Age	hrs	Client Info		35189	34718	34179
Oil Age	hrs	Client Info		3586	3115	2576
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		None	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>500	50	44	38
Iron	ppm	ASTM D5185m	>800	65	56	59
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m	>15	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>75	2	2	1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>75	1	2	1
Tin	ppm	ASTM D5185m	>8	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	18	17	18
Potassium	ppm	ASTM D5185m	>20	0	0	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	1	5
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		3	3	4
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m		11	15	13
Calcium	ppm	ASTM D5185m		3136	3240	3100
Phosphorus	ppm	ASTM D5185m		950	962	959
Zinc	ppm	ASTM D5185m		1066	1196	1183
Sulfur	ppm	ASTM D5185m		5236	4764	4858
Acid Number (AN)	mg KOH/g	ASTM D8045		1.47	1.23	1.10
Visc @ 40°C	cSt	ASTM D445		208	210	208
Visc @ 100°C	cSt	ASTM D445		18.2	18.1	18.1
Viscosity Index (VI)	Scale	ASTM D2270		96	94	95

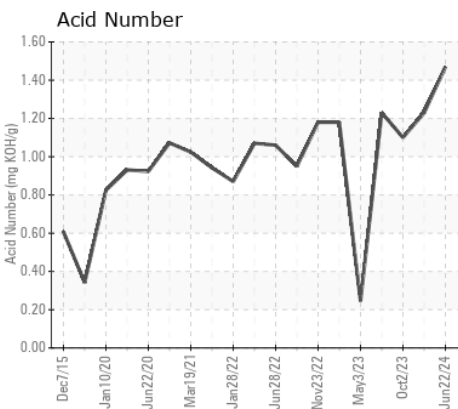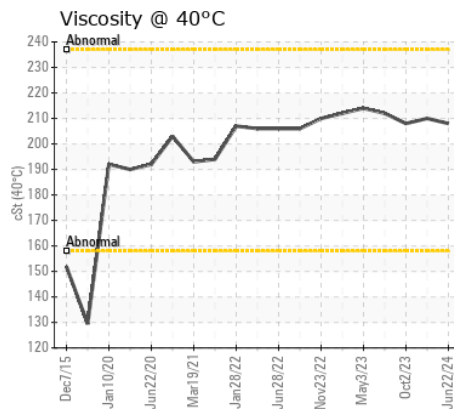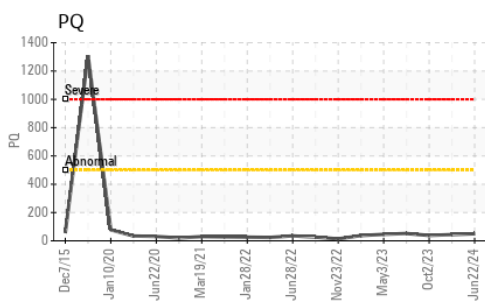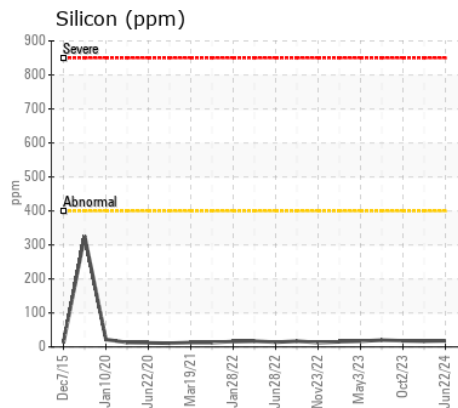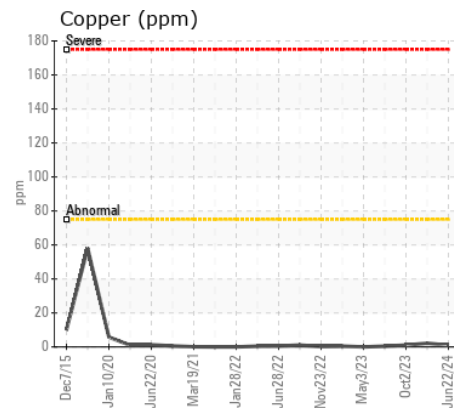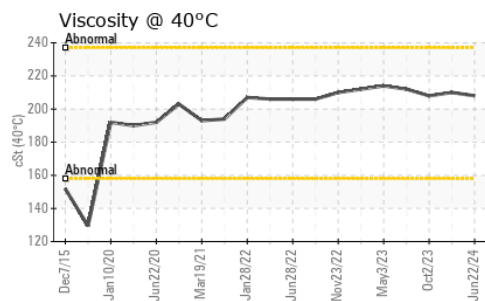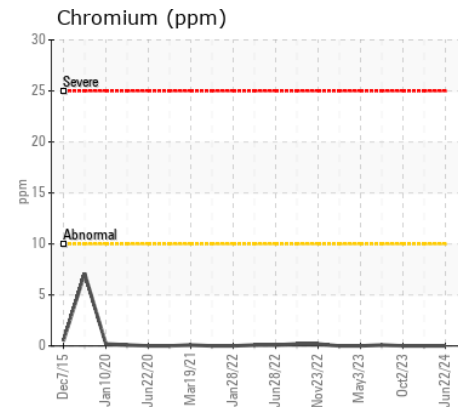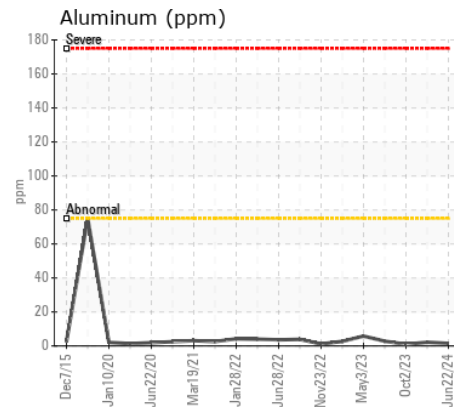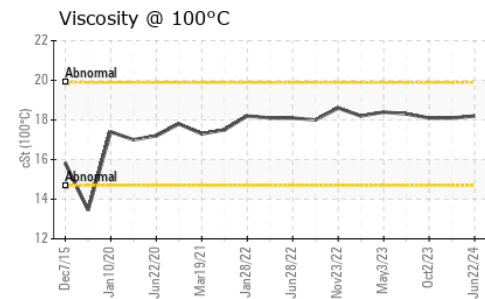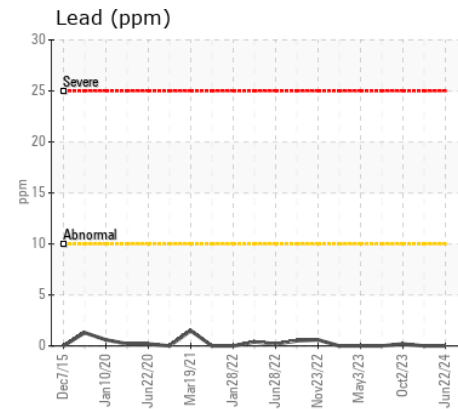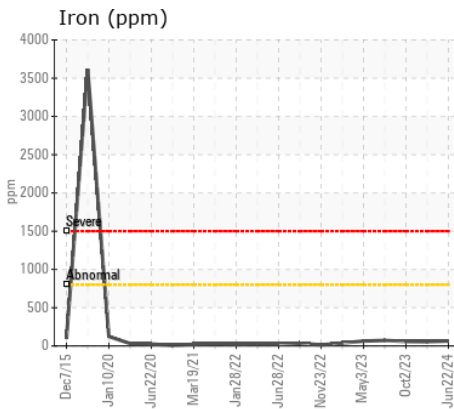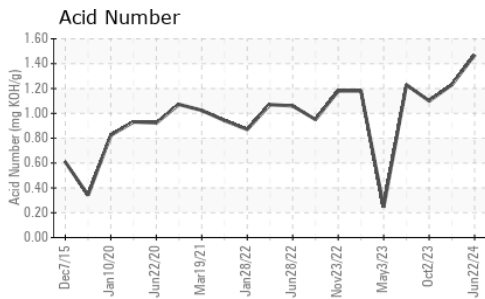

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10002065 **Received** : 01 Jul 2024
Lab Number : 06225302 **Tested** : 02 Jul 2024
Unique Number : 11103499 **Diagnosed** : 02 Jul 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137
 Contact: MIKE SNYDER
 msnyder@anchorstoneco.com
 T: (417)850-9635
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)