



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**CRAIG E PHILIP**  
Machine Id  
**[CRAIG E PHILIP] 004 565024-4**  
Component  
**Port Reduction Gear**  
Fluid  
**CHEVRON MEROPA 320 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0068810</b>	MW0064706	MW0064593
Sample Date		Client Info		<b>01 Jun 2024</b>	01 Mar 2024	07 Feb 2024
Machine Age	hrs	Client Info		<b>47367</b>	46548	46008
Oil Age	hrs	Client Info		<b>47367</b>	46548	46008
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	N/A	N/A
Filter Changed		Client Info		<b>None</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>69</b>	75	69
Chromium	ppm	ASTM D5185m	>10	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	3	2
Lead	ppm	ASTM D5185m	>100	<b>2</b>	3	<1
Copper	ppm	ASTM D5185m	>50	<b>8</b>	7	7
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>1</b>	1	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	2	1
Boron	ppm	ASTM D5185m	20	<b>8</b>	8	8
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m		<b>2</b>	<1	<1
Calcium	ppm	ASTM D5185m	25	<b>14</b>	29	17
Phosphorus	ppm	ASTM D5185m	235	<b>222</b>	278	247
Zinc	ppm	ASTM D5185m		<b>11</b>	12	<1
Sulfur	ppm	ASTM D5185m		<b>4163</b>	5757	4709
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	<b>0.75</b>	0.50	0.40
Visc @ 40°C	cSt	ASTM D445	304	<b>324</b>	326	338

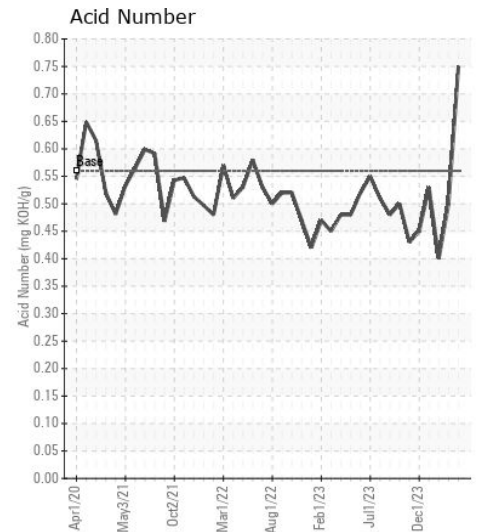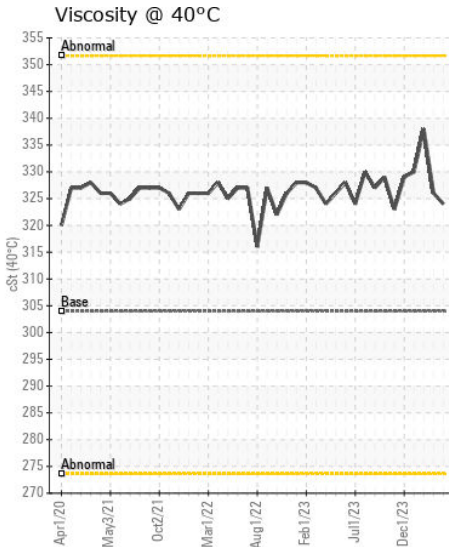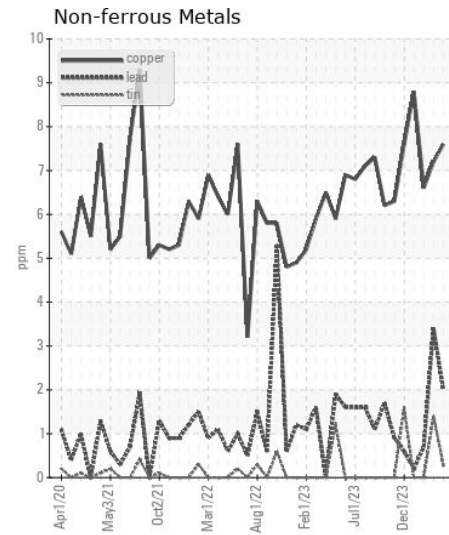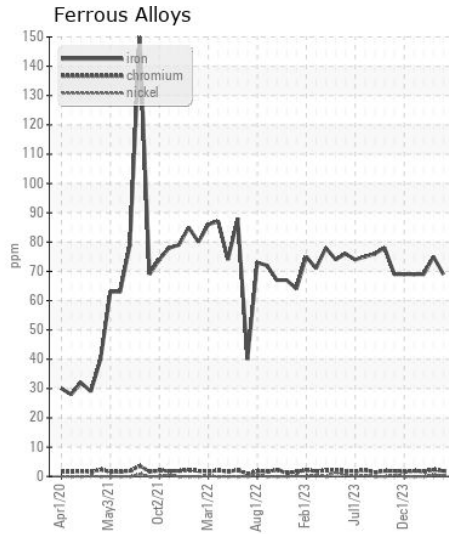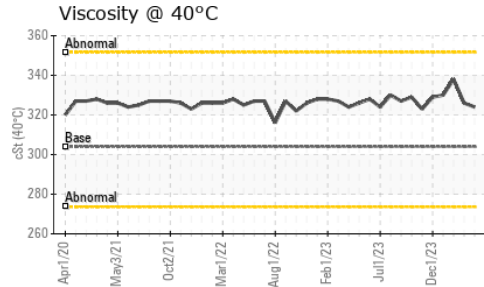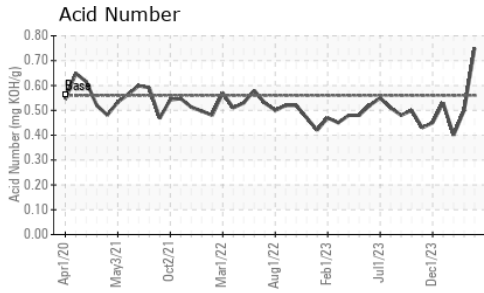

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW0068810

**Lab Number** : 06225406

**Unique Number** : 11103603

**Test Package** : MAR 2

**Received** : 01 Jul 2024

**Tested** : 02 Jul 2024

**Diagnosed** : 02 Jul 2024 - Wes Davis

**INGRAM BARGE**

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: TONY HUCKABEE

tony.huckabee@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)