



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
DeMatha Catholic School
Machine Id
RO 91200
Component
Rear Differential
Fluid
MOBIL MOBILUBE HD 80W90 (4 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0824045	---	---
Sample Date		Client Info		10 Jun 2024	---	---
Machine Age	mls	Client Info		76854	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1206	791	---	---
Chromium	ppm	ASTM D5185m	>9	6	---	---
Nickel	ppm	ASTM D5185m	>9	9	---	---
Titanium	ppm	ASTM D5185m		1	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>72	3	---	---
Lead	ppm	ASTM D5185m	>56	<1	---	---
Copper	ppm	ASTM D5185m	>57	6	---	---
Tin	ppm	ASTM D5185m	>6	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>344	110	---	---
Potassium	ppm	ASTM D5185m	>20	10	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		7	---	---
Boron	ppm	ASTM D5185m		33	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		2	---	---
Manganese	ppm	ASTM D5185m		17	---	---
Magnesium	ppm	ASTM D5185m		7	---	---
Calcium	ppm	ASTM D5185m		14	---	---
Phosphorus	ppm	ASTM D5185m		1024	---	---
Zinc	ppm	ASTM D5185m		75	---	---
Sulfur	ppm	ASTM D5185m		21486	---	---
Visc @ 40°C	cSt	ASTM D445	136	131	---	---

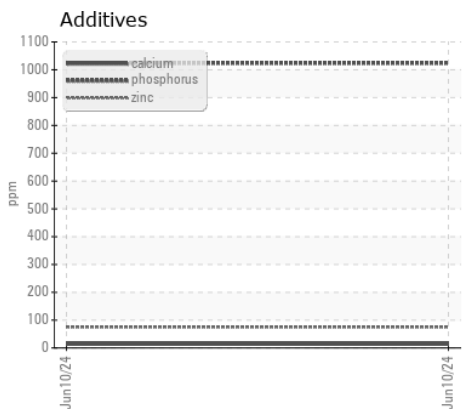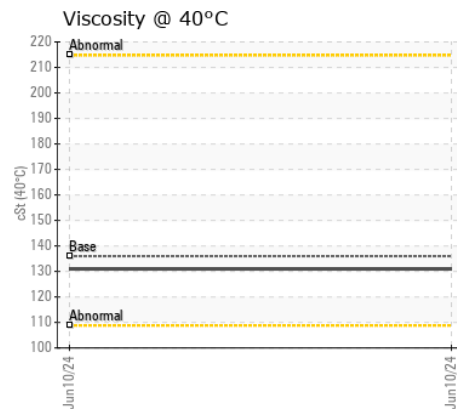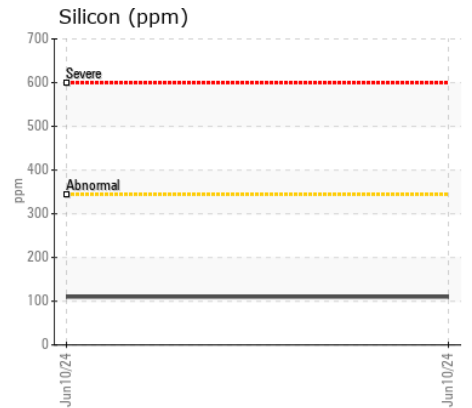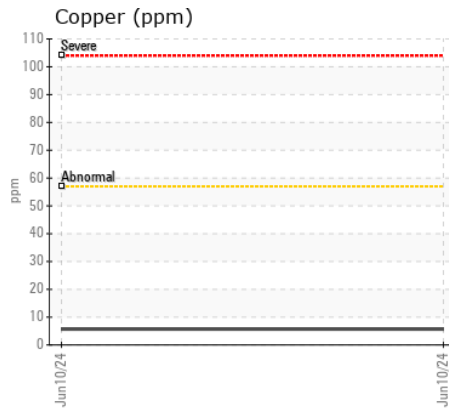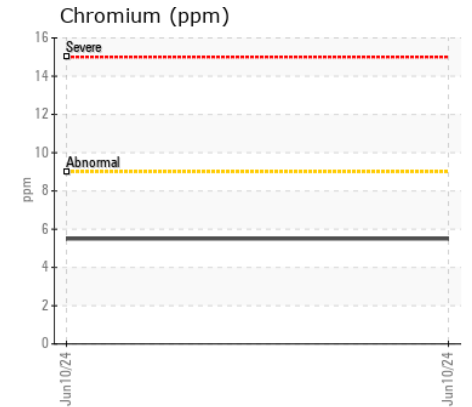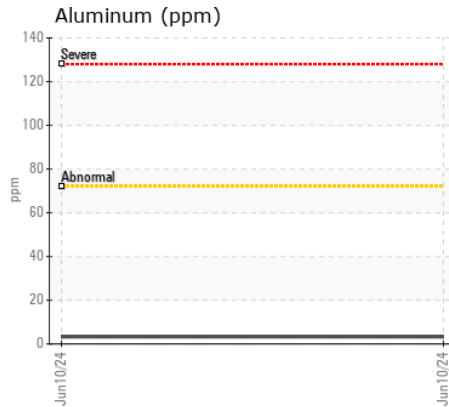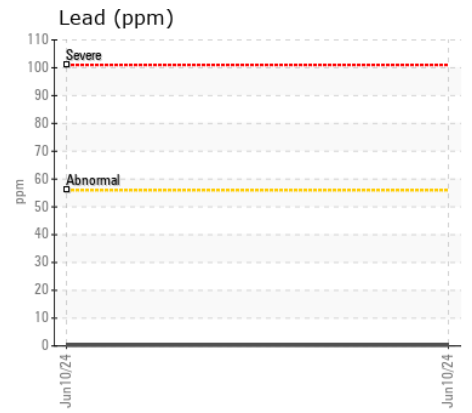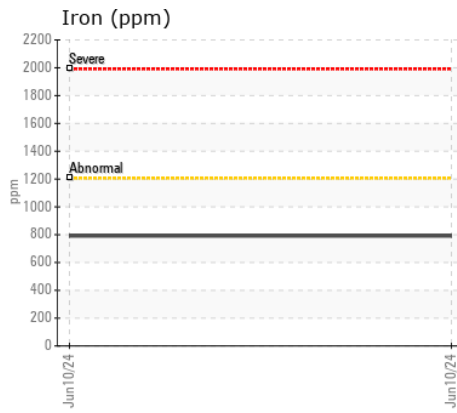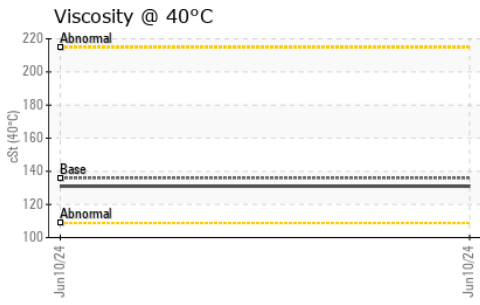

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0824045

Lab Number : 06225417

Unique Number : 11103614

Test Package : MOB 1

Received : 01 Jul 2024

Tested : 02 Jul 2024

Diagnosed : 03 Jul 2024 - Angela Borella

ATEL BUS & TRUCK

12120 CONWAY RD

BELTSVILLE, MD

US 20705

Contact: BRIAN CONNOLLY

bconnolly@atelbus.com

T: (301)210-5100

F: (301)210-5102

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)