



WEAR	ABNORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area
(83J3TW)
Machine Id
229035-632119
Component
Transmission (Auto)
Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0122854	GFL0108173	---
Sample Date		Client Info		26 Jun 2024	08 Jan 2024	---
Machine Age	hrs	Client Info		11207	10216	---
Oil Age	hrs	Client Info		10216	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Not Changed	---
Filter Changed		Client Info		Not Changed	Not Changed	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR

Clutch wear is indicated.

Iron	ppm	ASTM D5185m	>160	145	130	---
Chromium	ppm	ASTM D5185m	>5	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>5	<1	0	---
Aluminum	ppm	ASTM D5185m	>50	27	23	---
Lead	ppm	ASTM D5185m	>50	▲ 74	▲ 66	---
Copper	ppm	ASTM D5185m	>225	▲ 268	▲ 268	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION






There is a moderate amount of visible silt present in the sample.

Silicon	ppm	ASTM D5185m	>20	6	6	---
Potassium	ppm	ASTM D5185m	>20	4	3	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	▲ MODER	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	8	---
Boron	ppm	ASTM D5185m		105	105	---
Barium	ppm	ASTM D5185m		1	<1	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		4	4	---
Magnesium	ppm	ASTM D5185m		2	1	---
Calcium	ppm	ASTM D5185m		135	88	---
Phosphorus	ppm	ASTM D5185m		283	297	---
Zinc	ppm	ASTM D5185m		161	153	---
Sulfur	ppm	ASTM D5185m		1229	983	---
Visc @ 40°C	cSt	ASTM D445	34	34.0	32.0	---

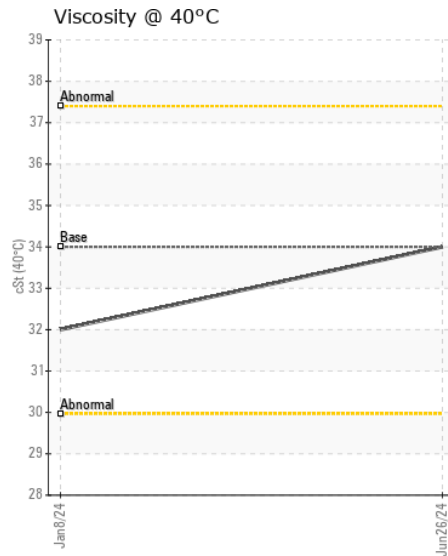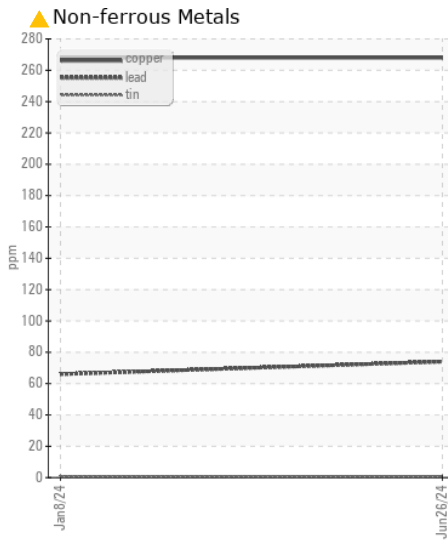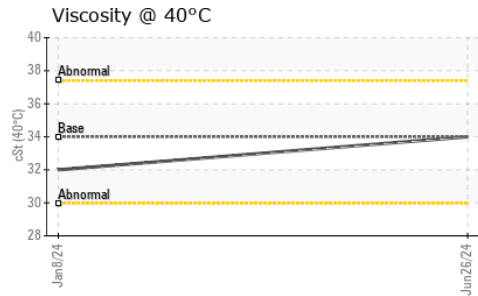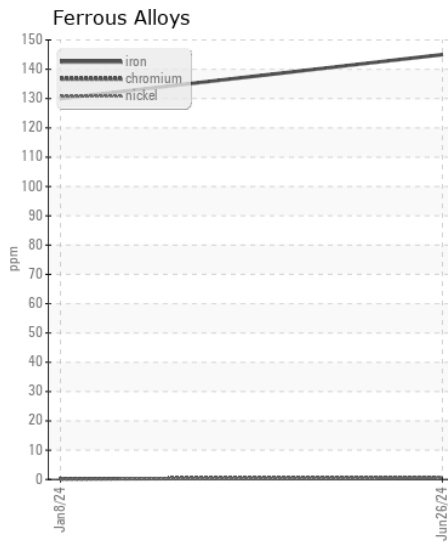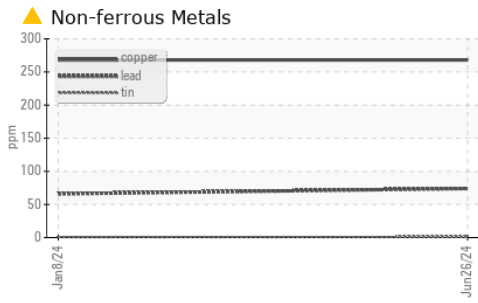

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0122854
Lab Number : 06225433
Unique Number : 11103630
Test Package : FLEET

Received : 01 Jul 2024
Tested : 02 Jul 2024
Diagnosed : 03 Jul 2024 - Jonathan Hester

GFL Environmental - 837 - Harrison TS
 22820 S State Route 291
 Harrisonville, MO
 US 64701
 Contact: SARA PATRICK
 spatrack@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: