



PacLease

# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**857-5165**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER 10W30 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0014749</b>	RPL0010904	---
Sample Date		Client Info		<b>10 Jun 2024</b>	05 Dec 2023	---
Machine Age	mls	Client Info		<b>48116</b>	23399	---
Oil Age	mls	Client Info		<b>24717</b>	23399	---
Filter Age	mls	Client Info		<b>24717</b>	23399	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>37</b>	64	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	2	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>13</b>	40	---
Lead	ppm	ASTM D5185m	>40	<b>1</b>	4	---
Copper	ppm	ASTM D5185m	>330	<b>5</b>	41	---
Tin	ppm	ASTM D5185m	>15	<b>1</b>	2	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>14</b>	48	---
Potassium	ppm	ASTM D5185m	>20	<b>40</b>	140	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.3</b>	10.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.5</b>	21.9	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	4	---
Boron	ppm	ASTM D5185m		<b>19</b>	26	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>32</b>	10	---
Manganese	ppm	ASTM D5185m		<b>2</b>	7	---
Magnesium	ppm	ASTM D5185m		<b>567</b>	777	---
Calcium	ppm	ASTM D5185m		<b>1523</b>	1365	---
Phosphorus	ppm	ASTM D5185m		<b>707</b>	736	---
Zinc	ppm	ASTM D5185m		<b>861</b>	865	---
Sulfur	ppm	ASTM D5185m		<b>2675</b>	2747	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.8</b>	18.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>6.4</b>	5.9	---
Visc @ 100°C	cSt	ASTM D445	11.9	<b>10.7</b>	11.4	---

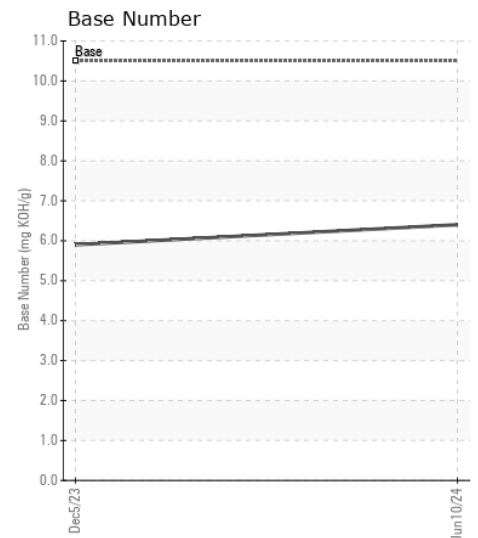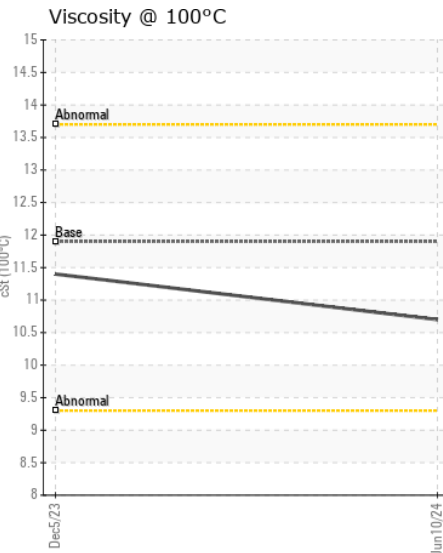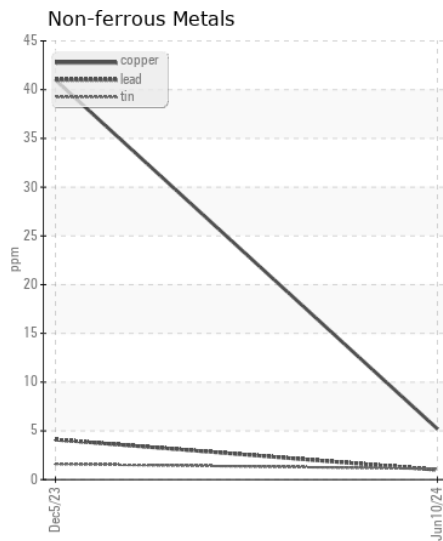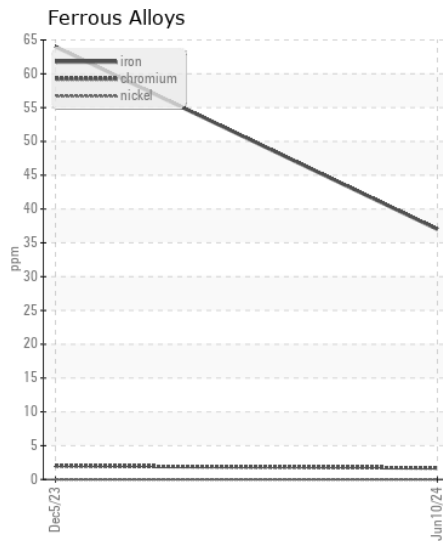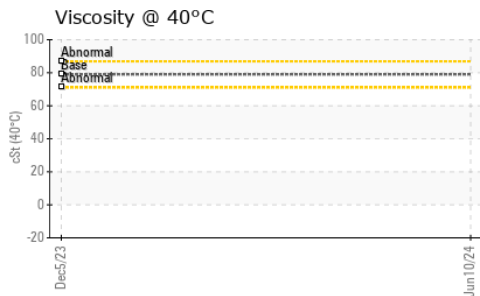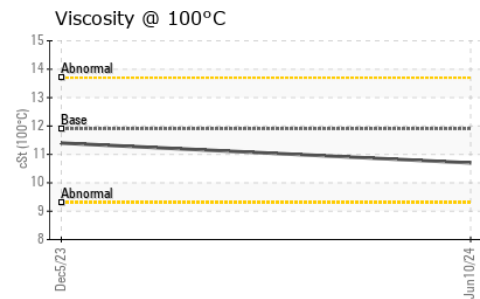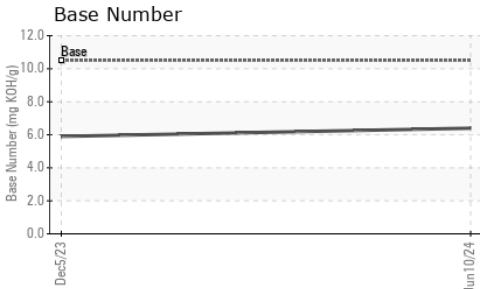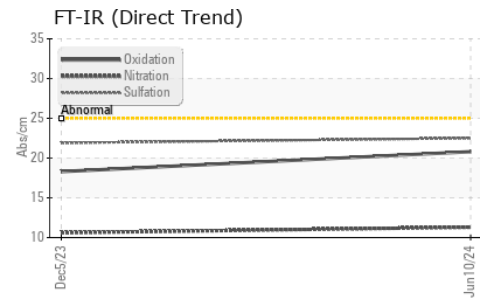

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : RPL0014749

**Lab Number** : 06225524

**Unique Number** : 11103721

**Test Package** : FLEET ( Additional Tests: KV40 )

**Received** : 01 Jul 2024

**Tested** : 03 Jul 2024

**Diagnosed** : 03 Jul 2024 - Don Baldrige

**RTL PACLEASE - 7001 - Houston**

6300 N. Loop East

Houston, TX

US 77026

Contact: RODNEY BRIGGS

briggsr@rushenterprises.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)