



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
857-4988
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0018883	RPL0005599	---
Sample Date		Client Info		13 Jun 2024	31 Jan 2023	---
Machine Age	mls	Client Info		103717	20449	---
Oil Age	mls	Client Info		0	0	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Changed	---
Filter Changed		Client Info		Not Changd	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	50	47	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	<1	---
Aluminum	ppm	ASTM D5185m	>20	16	67	---
Lead	ppm	ASTM D5185m	>40	0	<1	---
Copper	ppm	ASTM D5185m	>330	4	49	---
Tin	ppm	ASTM D5185m	>15	1	1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	15	15	---
Potassium	ppm	ASTM D5185m	>20	33	197	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.7	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	14.8	10.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.9	22.2	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	2	---
Boron	ppm	ASTM D5185m		32	34	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		52	11	---
Manganese	ppm	ASTM D5185m		1	2	---
Magnesium	ppm	ASTM D5185m		576	696	---
Calcium	ppm	ASTM D5185m		1786	1410	---
Phosphorus	ppm	ASTM D5185m	1260	805	720	---
Zinc	ppm	ASTM D5185m	1400	981	849	---
Sulfur	ppm	ASTM D5185m		2661	2950	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	29.2	18.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	5.9	6.2	---
Visc @ 100°C	cSt	ASTM D445	11.1	12.4	11.3	---

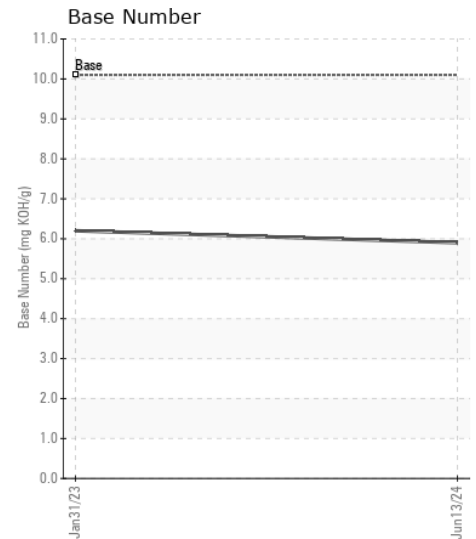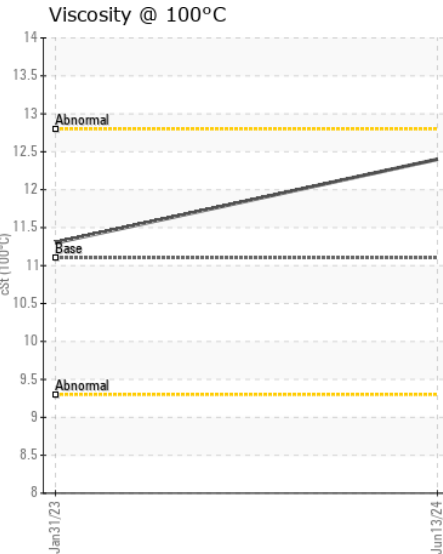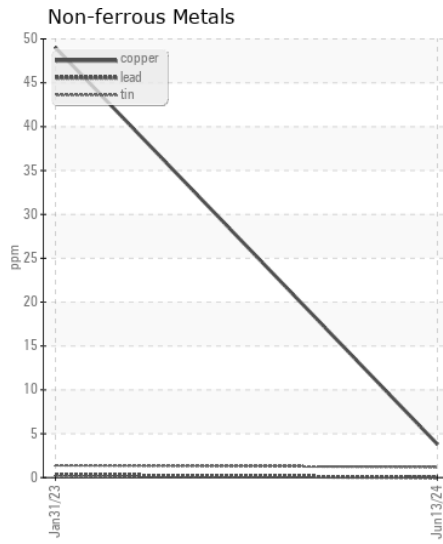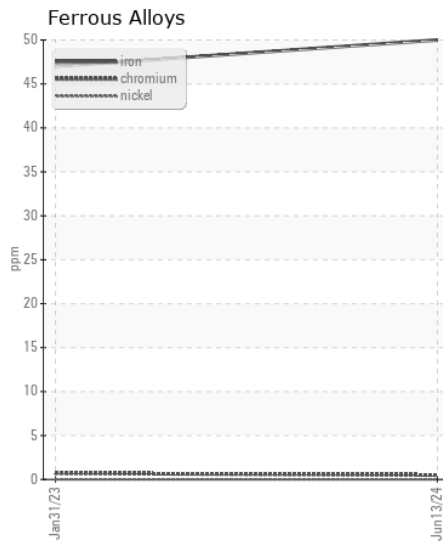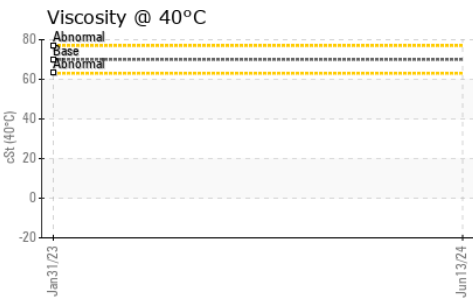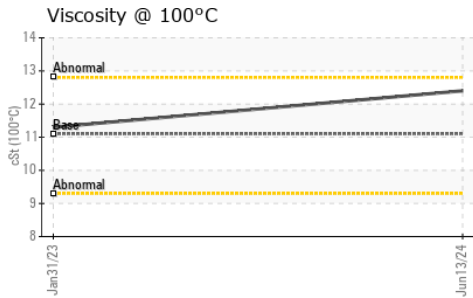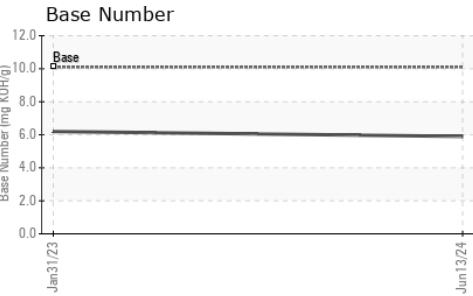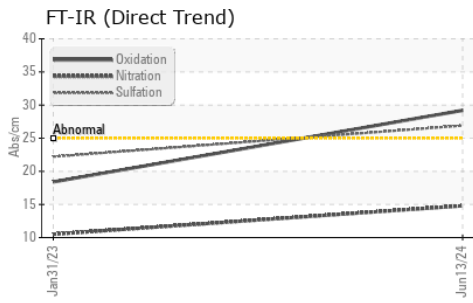

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0018883 **Received** : 01 Jul 2024
Lab Number : 06225539 **Tested** : 03 Jul 2024
Unique Number : 11103736 **Diagnosed** : 03 Jul 2024 - Don Baldrige
Test Package : FLEET (Additional Tests: KV40)

RTL PACLEASE - 7001 - Houston
 6300 N. Loop East
 Houston, TX
 US 77026
 Contact: RODNEY BRIGGS
 briggsr@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: