

Area
MIXERS
Machine Id
[MIXERS] M216
Component
Diesel Engine
Fluid
KENDALL 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0098496	PCA0110022	---
Sample Date		Client Info		24 Jun 2024	14 Feb 2024	---
Machine Age	hrs	Client Info		19994	20087	---
Oil Age	hrs	Client Info		600	600	---
Filter Age	hrs	Client Info		600	600	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	22	40	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		<1	1	---
Silver	ppm	ASTM D5185m	>3	0	<1	---
Aluminum	ppm	ASTM D5185m	>20	3	2	---
Lead	ppm	ASTM D5185m	>40	0	1	---
Copper	ppm	ASTM D5185m	>330	5	10	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	14	▲ 50	---
Potassium	ppm	ASTM D5185m	>20	<1	3	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	10.1	10.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.9	21.1	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	1	---
Boron	ppm	ASTM D5185m	6.3	42	40	---
Barium	ppm	ASTM D5185m	0.6	0	<1	---
Molybdenum	ppm	ASTM D5185m	0.4	85	85	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	277	48	133	---
Calcium	ppm	ASTM D5185m	1514	2272	1876	---
Phosphorus	ppm	ASTM D5185m	634	1030	932	---
Zinc	ppm	ASTM D5185m	743	1254	1126	---
Sulfur	ppm	ASTM D5185m	2592	4096	3298	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.6	18.3	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.9	8.38	---
Visc @ 100°C	cSt	ASTM D445		13.7	13.3	---

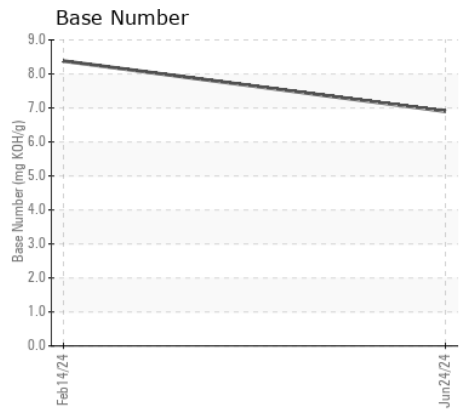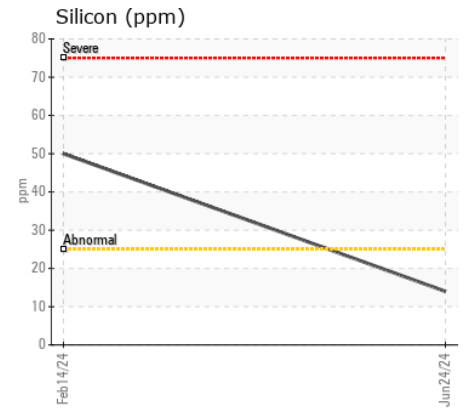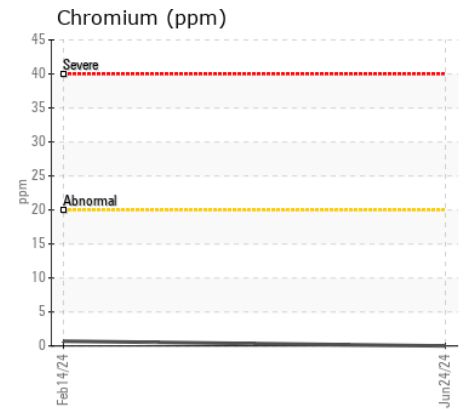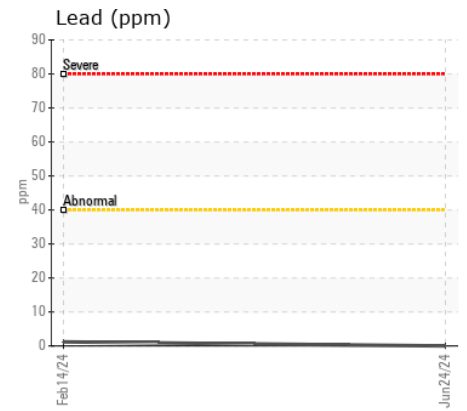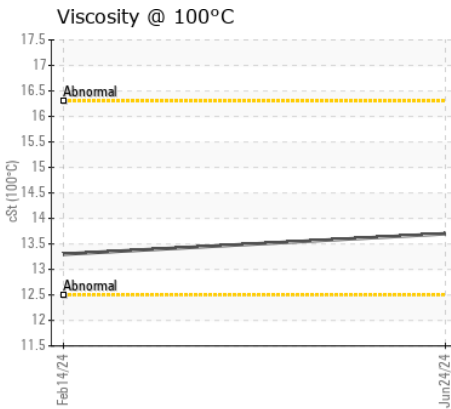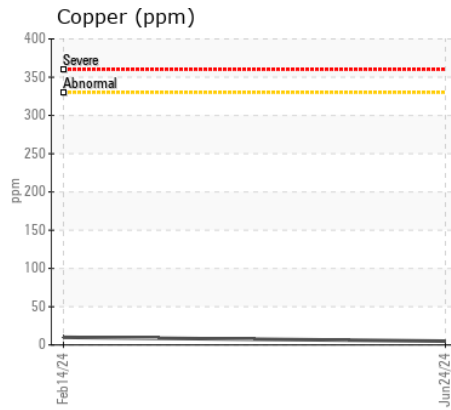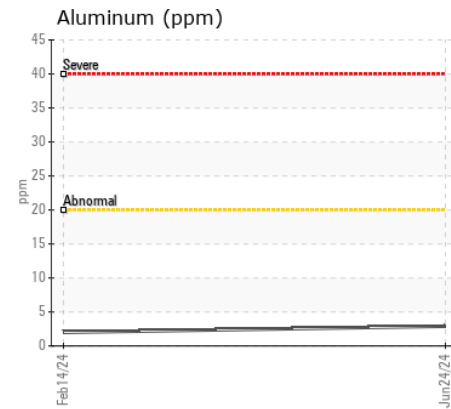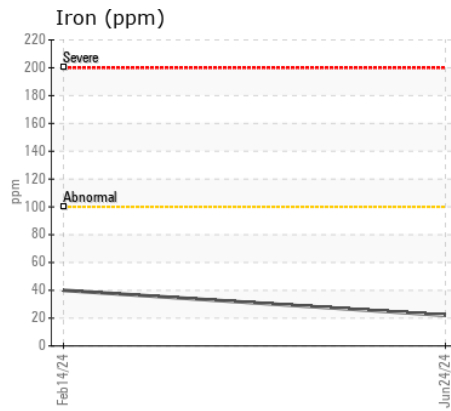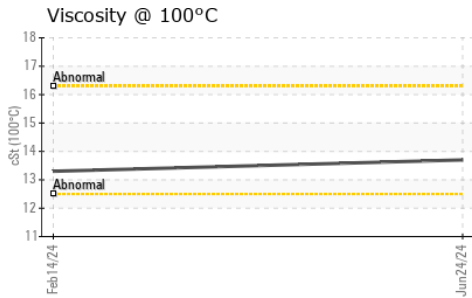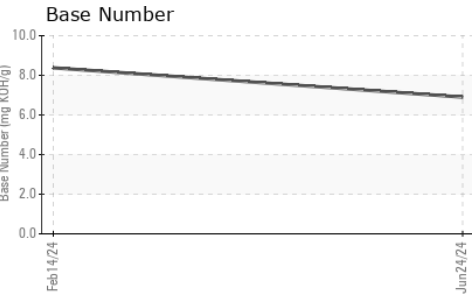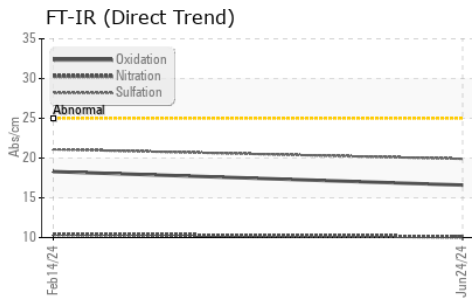

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0098496 **Received** : 01 Jul 2024
Lab Number : 06225576 **Tested** : 03 Jul 2024
Unique Number : 11103773 **Diagnosed** : 03 Jul 2024 - Wes Davis
Test Package : MOB 2

CONSTRUCTION SERVICES
 2420 BOSTON RD
 WILBRAHAM, MA
 US 01095
 Contact: Michael Dupuis
 mdupuis@cs-ma.us
 T: (413)733-6331
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)