



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HBR
Component
Port Main Engine
Fluid
CHEVRON DELO 400 XLE 15W40 (11 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW06225761	MW06166393	MW06132974
Sample Date		Client Info		01 Jul 2024	30 Apr 2024	28 Mar 2024
Machine Age	hrs	Client Info		29829	28845	28350
Oil Age	hrs	Client Info		979	495	2648
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	8	5	6
Chromium	ppm	ASTM D5185m	>8	<1	0	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	<1
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>15	3	1	2
Lead	ppm	ASTM D5185m	>18	<1	0	<1
Copper	ppm	ASTM D5185m	>80	<1	4	0
Tin	ppm	ASTM D5185m	>14	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	4	4	5
Potassium	ppm	ASTM D5185m	>20	3	0	5
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		1	0.5	0.7
Nitration	Abs/cm	*ASTM D7624	>20	6.1	5.6	6.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.8	19.3	19.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<1	<1	2
Boron	ppm	ASTM D5185m		246	287	192
Barium	ppm	ASTM D5185m		<1	<1	0
Molybdenum	ppm	ASTM D5185m		63	63	60
Manganese	ppm	ASTM D5185m		<1	2	0
Magnesium	ppm	ASTM D5185m		266	296	295
Calcium	ppm	ASTM D5185m		1726	1820	1916
Phosphorus	ppm	ASTM D5185m	760	843	960	842
Zinc	ppm	ASTM D5185m	830	1057	1093	1010
Sulfur	ppm	ASTM D5185m	2770	2772	3720	3495
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.1	12.1	12.6
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	7.1	7.2	7.5
Visc @ 100°C	cSt	ASTM D445	14.9	12.7	12.5	12.3


FT-IR (Direct Trend)

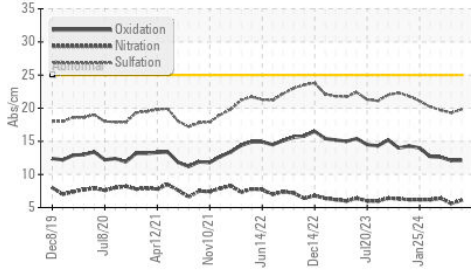


Ferrous Alloys

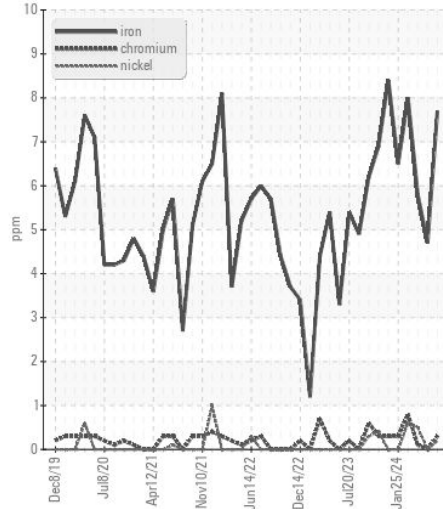


Base Number

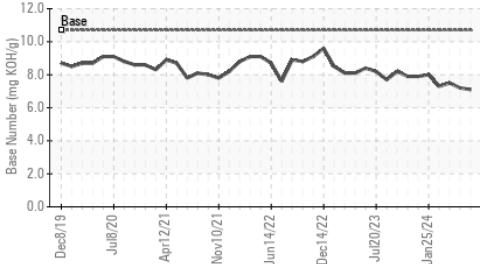


Non-ferrous Metals

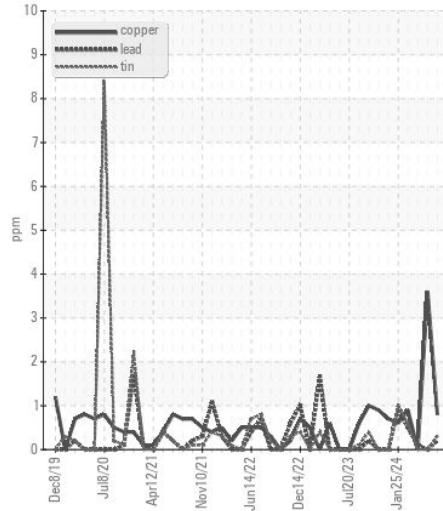


Viscosity @ 100°C

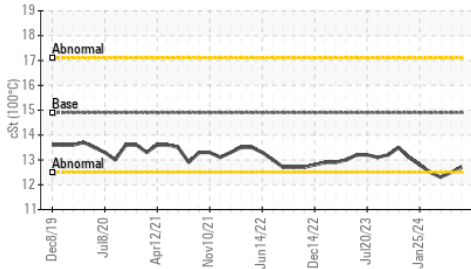

Viscosity @ 100°C

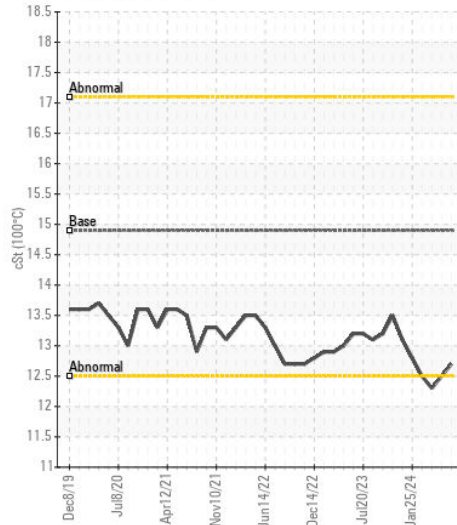

Base Number

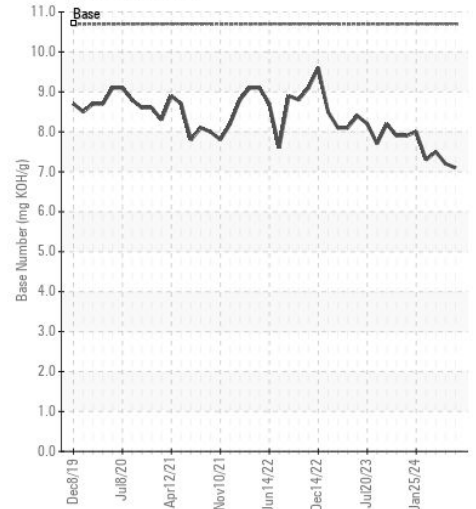

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW06225761
Lab Number : 06225761
Unique Number : 11103958
Test Package : MAR 2
Received : 02 Jul 2024
Tested : 03 Jul 2024
Diagnosed : 03 Jul 2024 - Don Baldridge

ILLINOIS MARINE TOWING
 PO BOX 391
 LEMONT, IL
 US 60439
 Contact: RHETT DANIEL
 rdaniel@imtowing.com
 T: (630)280-4926
 F: (630)739-2041

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)