



LEAHY-WOLF
Lubricating specialists since 1946

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
K5 CONSTRUCTION CORPORATION - HODGKINS IL

Machine Id
4137
Component
Diesel Engine

Fluid
LEAHY WOLF PREMIUM 15W40 (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LW0009285	LW0008434	LW0005922
Sample Date		Client Info		27 Jun 2024	17 Nov 2023	30 Aug 2023
Machine Age	hrs	Client Info		5413	4754	4199
Oil Age	hrs	Client Info		659	555	492
Filter Age	hrs	Client Info		0	555	492
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	11	6	8
Chromium	ppm	ASTM D5185m	>4	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>2	<1	<1	0
Aluminum	ppm	ASTM D5185m	>25	8	9	25
Lead	ppm	ASTM D5185m	>45	<1	0	0
Copper	ppm	ASTM D5185m	>85	1	<1	<1
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>30	4	4	4
Potassium	ppm	ASTM D5185m	>20	19	21	62
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	7.8	7.0	6.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	18.9	18.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	0	2
Boron	ppm	ASTM D5185m		2	<1	0
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		63	64	64
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		954	1019	1055
Calcium	ppm	ASTM D5185m		1112	1190	1215
Phosphorus	ppm	ASTM D5185m		990	1088	1118
Zinc	ppm	ASTM D5185m		1254	1354	1360
Sulfur	ppm	ASTM D5185m		2771	3463	3819
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.2	14.8	14.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.3	9.0	8.6
Visc @ 100°C	cSt	ASTM D445	15.6	13.4	13.5	13.7


FT-IR (Direct Trend)

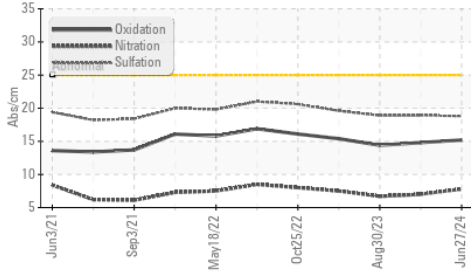


Ferrous Alloys

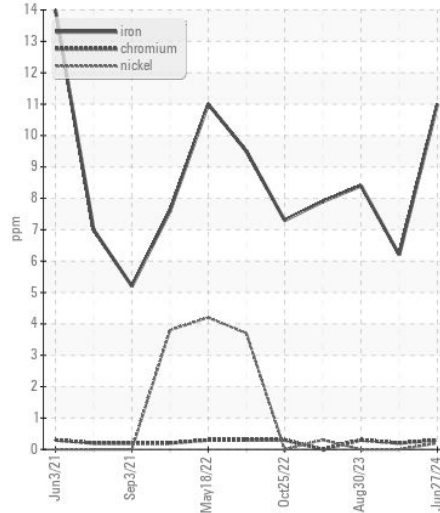


Base Number

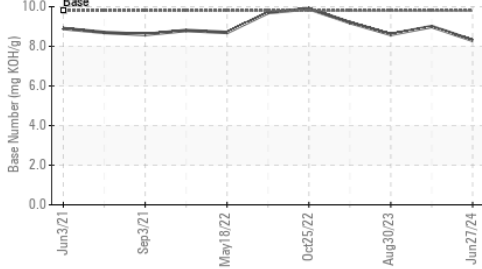


Non-ferrous Metals

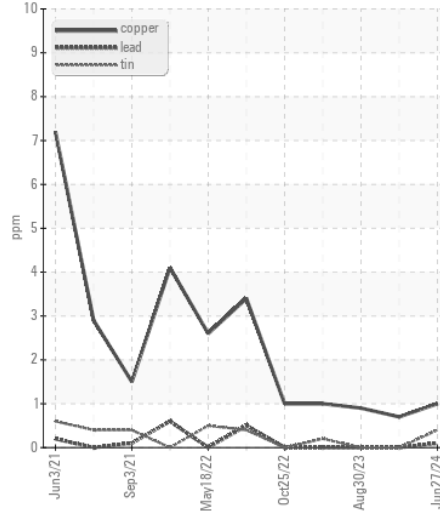


Viscosity @ 100°C

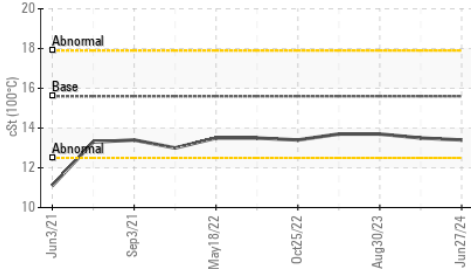

Viscosity @ 100°C

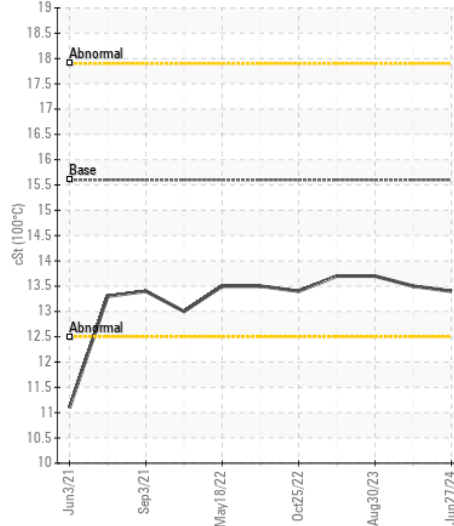

Base Number

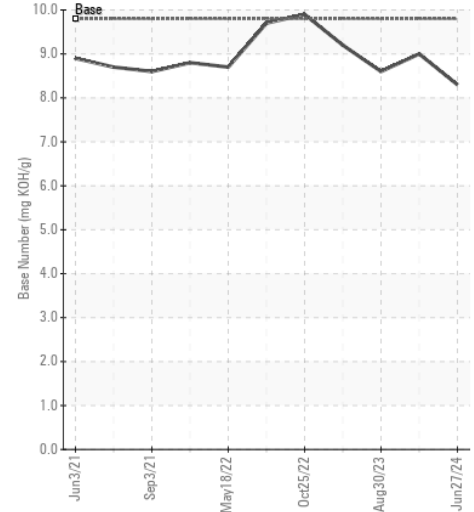

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LW0009285
Lab Number : 06225769
Unique Number : 11103966
Test Package : FLEET
Received : 02 Jul 2024
Tested : 03 Jul 2024
Diagnosed : 03 Jul 2024 - Wes Davis

K5 CONSTRUCTION CORPORATION
 6301 S EAST AVENUE
 HODGKINS, IL
 US 60525
 Contact: Dave Gorski
 daveg@k-five.net
 T: (630)257-5600
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)