



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
ISUZU 8464797
Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0019272	RPL0016879	RPL0015062
Sample Date		Client Info		09 Apr 2024	16 Jan 2024	10 Oct 2023
Machine Age	mls	Client Info		78724	73766	67784
Oil Age	mls	Client Info		73766	73766	67784
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	11	21	28
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	3	6	28
Lead	ppm	ASTM D5185m	>40	<1	2	1
Copper	ppm	ASTM D5185m	>330	4	10	21
Tin	ppm	ASTM D5185m	>15	0	<1	2
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	5	7	36
Potassium	ppm	ASTM D5185m	>20	2	0	75
Fuel		WC Method	>5	<1.0	<1.0	1.3
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.7	1.3	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.9	11.0	7.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.7	24.6	18.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	3	2
Boron	ppm	ASTM D5185m	0	59	24	81
Barium	ppm	ASTM D5185m	0	0	0	2
Molybdenum	ppm	ASTM D5185m	0	9	41	13
Manganese	ppm	ASTM D5185m		<1	<1	4
Magnesium	ppm	ASTM D5185m	0	695	553	689
Calcium	ppm	ASTM D5185m		1490	1839	1266
Phosphorus	ppm	ASTM D5185m		737	819	707
Zinc	ppm	ASTM D5185m		875	962	830
Sulfur	ppm	ASTM D5185m		3322	2815	3053
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.9	23.3	14.0
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	8.8	10.6	8.1
Visc @ 100°C	cSt	ASTM D445	14	13.7	14.2	11.4


FT-IR (Direct Trend)

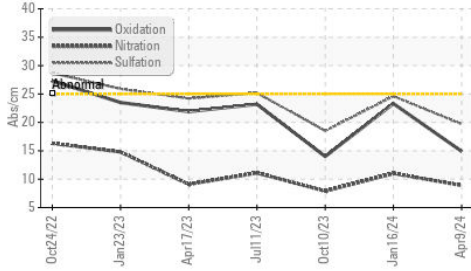


Ferrous Alloys

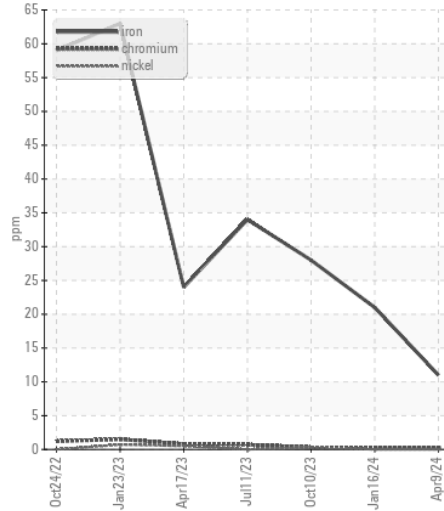


Base Number

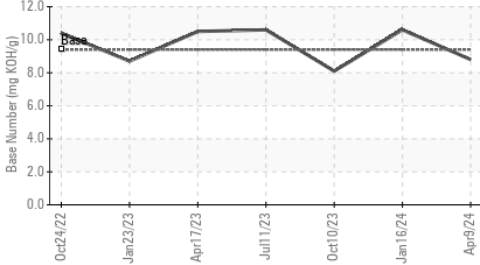


Viscosity @ 100°C

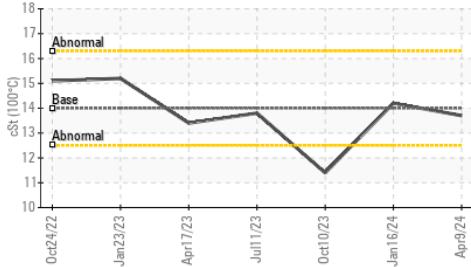


Non-ferrous Metals

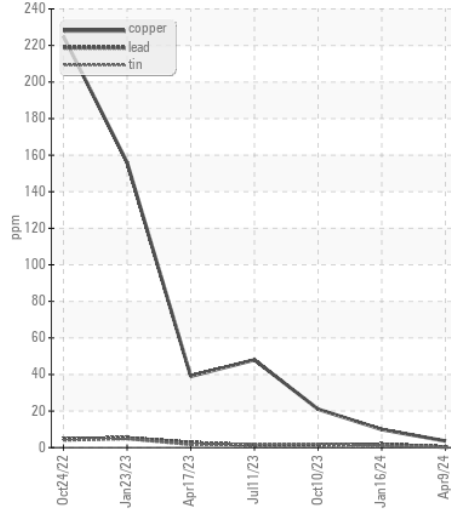

Viscosity @ 100°C

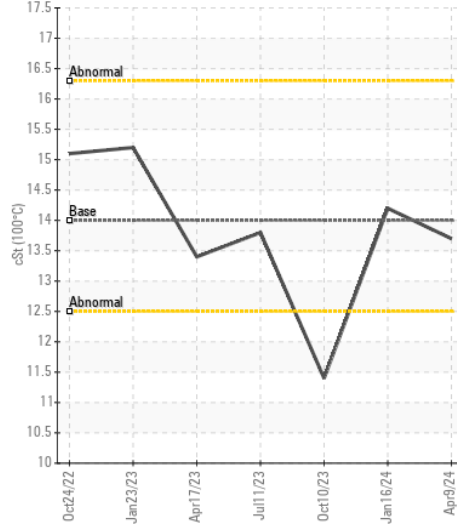

Base Number

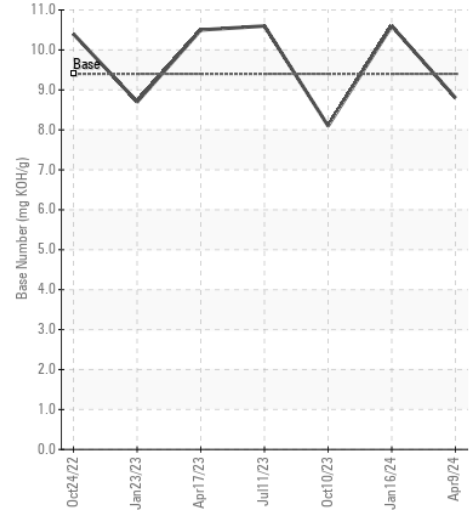

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0019272
Lab Number : 06225861
Unique Number : 11109354
Test Package : FLEET

Received : 02 Jul 2024
Tested : 03 Jul 2024
Diagnosed : 03 Jul 2024 - Wes Davis

RTL PACLEASE - 7006 - Pico Rivera
 7837 Telegraph Rd
 Pico Rivera, CA
 US 90660
 Contact: GERARDO CARROLA
 carrolag@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: