



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W52765]
 Machine Id
JOHN DEERE 310E 1DW310EXEJF685830
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0224897	JR0165357	JR0147122
Sample Date		Client Info		28 Jun 2024	11 Jul 2023	23 Jan 2023
Machine Age	hrs	Client Info		4965	4460	4064
Oil Age	hrs	Client Info		0	0	4064
Filter Age	hrs	Client Info		0	0	4064
Oil Changed		Client Info		Not Chngd	Not Chngd	Changed
Filter Changed		Client Info		Not Chngd	Not Chngd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	15	18	8
Iron	ppm	ASTM D5185m	>71	7	8	18
Chromium	ppm	ASTM D5185m	>11	<1	<1	3
Nickel	ppm	ASTM D5185m	>6	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>11	1	2	3
Lead	ppm	ASTM D5185m	>13	0	<1	<1
Copper	ppm	ASTM D5185m	>21	2	2	4
Tin	ppm	ASTM D5185m	>5	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>24	2	2	4
Potassium	ppm	ASTM D5185m	>20	2	2	3
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	4905	5483	29409
Particles >6µm		ASTM D7647	>5000	60	305	266
Particles >14µm		ASTM D7647	>640	7	28	27
Particles >21µm		ASTM D7647	>160	2	6	8
Particles >38µm		ASTM D7647	>40	0	0	1
Particles >71µm		ASTM D7647	>10	0	0	1
Oil Cleanliness		ISO 4406 (c)	>23/19/16	19/13/10	20/15/12	22/15/12
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	3	0	2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	2
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		2	2	2
Calcium	ppm	ASTM D5185m	87	115	102	103
Phosphorus	ppm	ASTM D5185m	727	656	631	602
Zinc	ppm	ASTM D5185m	900	844	848	830
Sulfur	ppm	ASTM D5185m	1500	1951	1729	1571
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.64	0.74	0.63
Visc @ 40°C	cSt	ASTM D445	65	59.5	60.2	60.5

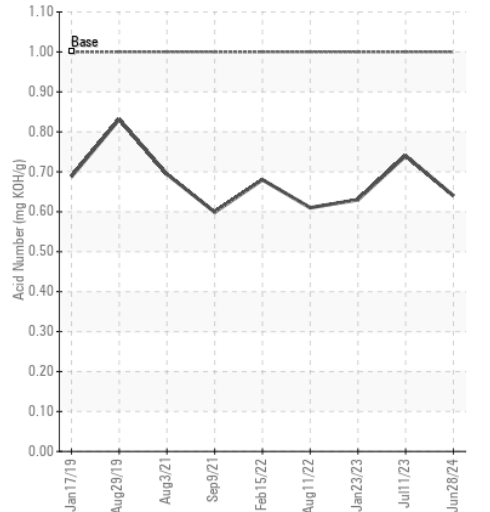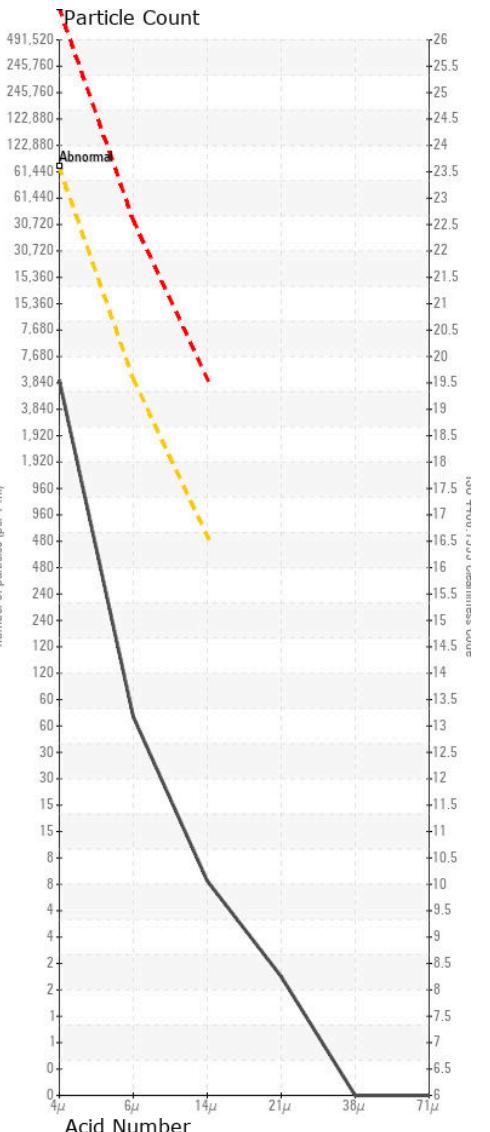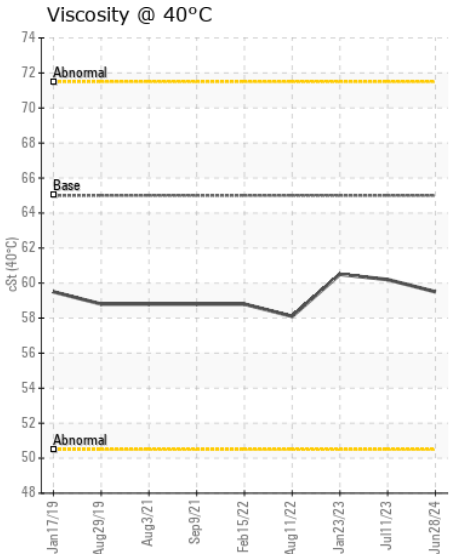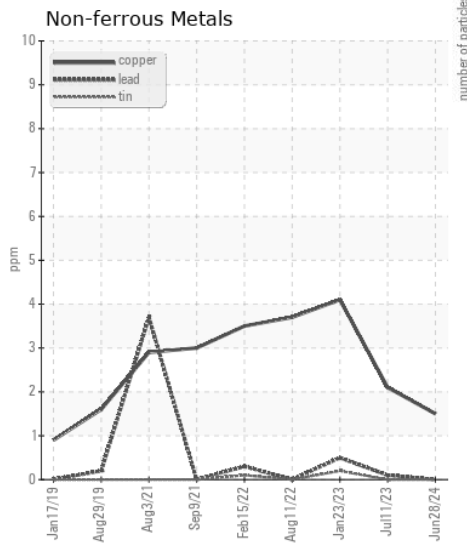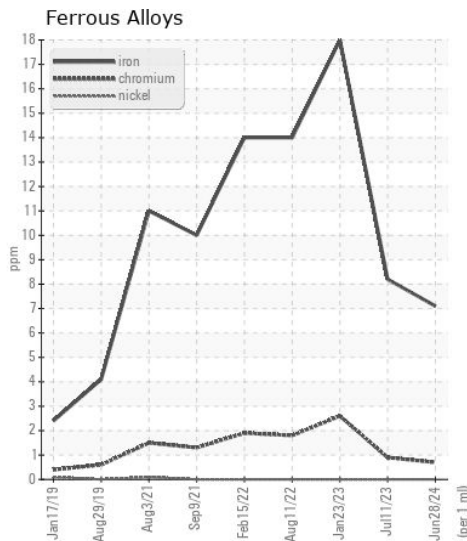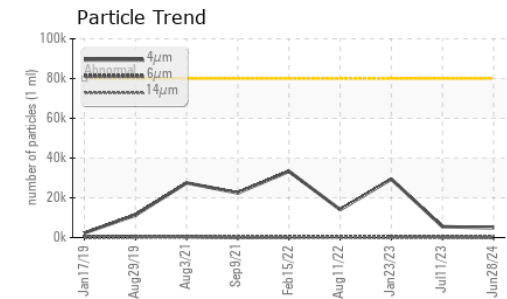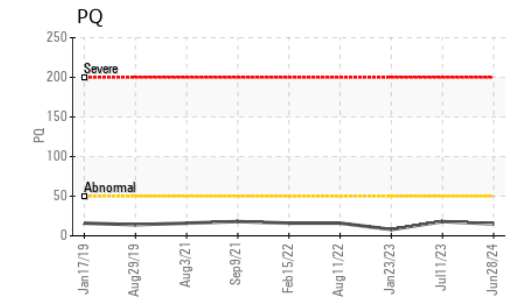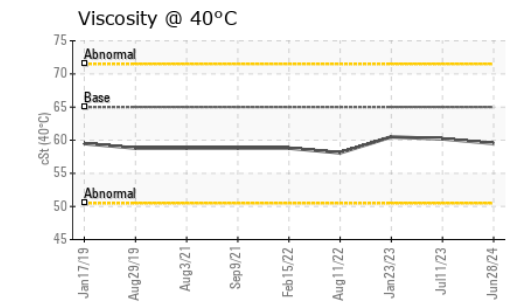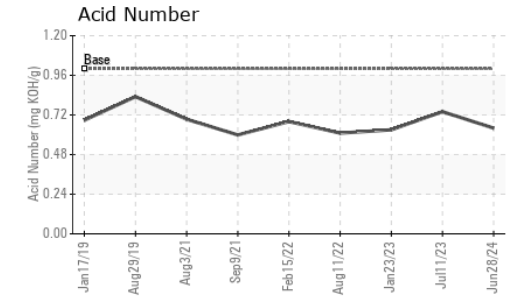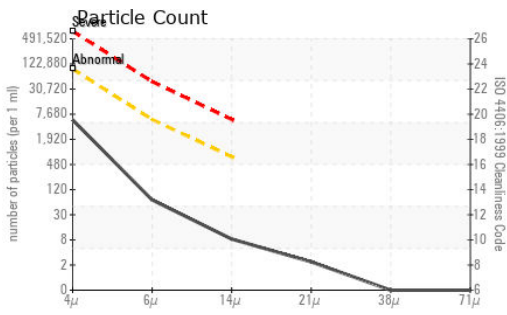

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0224897

Lab Number : 06226110

Unique Number : 11109603

Test Package : CONST (Additional Tests: PQ)

Received : 02 Jul 2024

Tested : 03 Jul 2024

Diagnosed : 03 Jul 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

L2 CONSTRUCTION

1950 BELLWOOD RD

RICHMOND, VA

US 23237

Contact: DANIEL LIPFORD

daniell@l2constructionservices.com

T: (804)275-2428

F: