



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FALK KELLY LEE
Component
Starboard Reduction Gear
Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (180 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0067050	MW0067055	MW0066973
Sample Date		Client Info		23 Jun 2024	28 May 2024	09 May 2024
Machine Age	hrs	Client Info		18550	18137	17612
Oil Age	hrs	Client Info		18550	18137	500
Filter Age	hrs	Client Info		500	500	0
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	22	19	20
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	1
Silver	ppm	ASTM D5185m		0	<1	<1
Aluminum	ppm	ASTM D5185m	>25	<1	3	2
Lead	ppm	ASTM D5185m	>100	0	<1	<1
Copper	ppm	ASTM D5185m	>50	2	5	5
Tin	ppm	ASTM D5185m	>10	0	<1	1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	8	8	9
Potassium	ppm	ASTM D5185m	>20	2	3	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		10	8	8
Boron	ppm	ASTM D5185m		<1	2	2
Barium	ppm	ASTM D5185m		0	1	0
Molybdenum	ppm	ASTM D5185m		0	5	3
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		5	7	18
Calcium	ppm	ASTM D5185m		53	108	96
Phosphorus	ppm	ASTM D5185m	1360	249	308	256
Zinc	ppm	ASTM D5185m	1480	15	46	42
Sulfur	ppm	ASTM D5185m		7668	6913	7385
Acid Number (AN)	mg KOH/g	ASTM D8045		0.41	0.43	0.36
Visc @ 40°C	cSt	ASTM D445	125	221	220	221

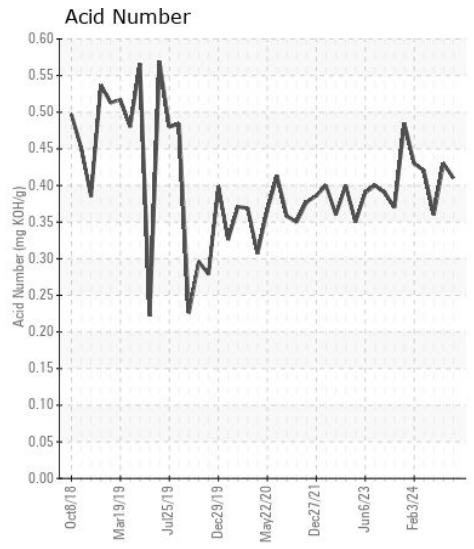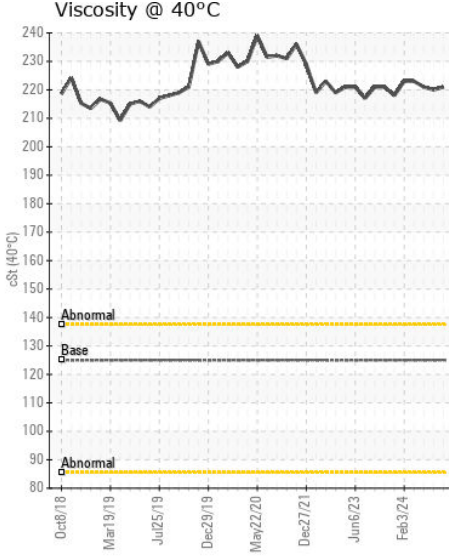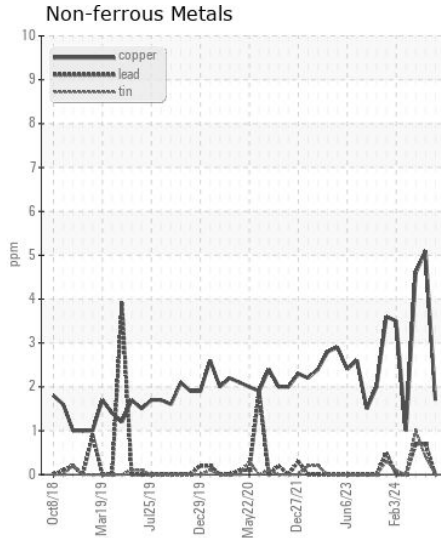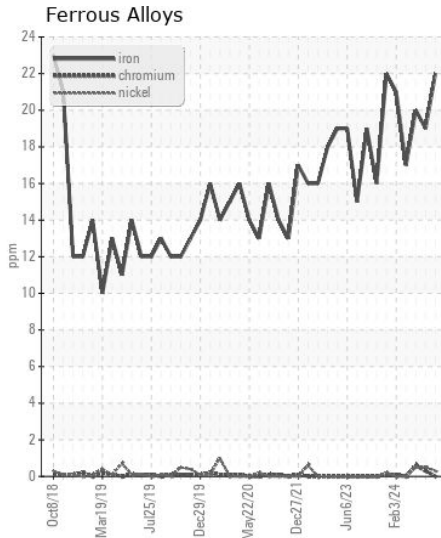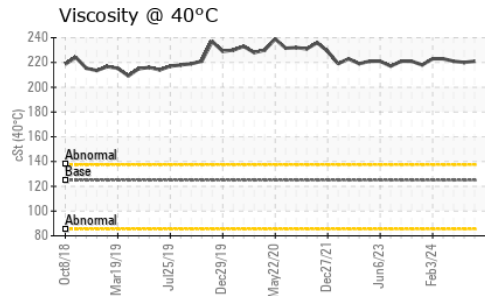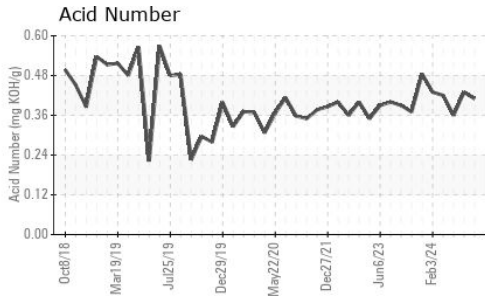

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0067050
Lab Number : 06226411
Unique Number : 11109904
Test Package : MAR 2
Received : 02 Jul 2024
Tested : 03 Jul 2024
Diagnosed : 05 Jul 2024 - Don Baldrige

MAGNOLIA MARINE TRANSPORT
 697 HAINING ROAD
 VICKSBURG, MS
 US 39183
 Contact: MMT MAINTENANCE PLANNERS
 mmtmaintenanceplanners@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)