



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JENBACHER GM01 (S/N 1144716)
Component
Biogas Engine
Fluid
MAHLER Q8 Mahler G8 SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0944679	WC0944674	WC0914304
Sample Date		Client Info		01 Jul 2024	24 Jun 2024	18 Jun 2024
Machine Age	hrs	Client Info		53449	53307	53181
Oil Age	hrs	Client Info		2419	2277	2130
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	7	8	8
Chromium	ppm	ASTM D5185m	>5	1	2	2
Nickel	ppm	ASTM D5185m	>2	<1	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>15	3	4	3
Lead	ppm	ASTM D5185m	>20	0	0	<1
Copper	ppm	ASTM D5185m	>15	3	4	3
Tin	ppm	ASTM D5185m	>5	6	5	5
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION














There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>200	79	82	75
Potassium	ppm	ASTM D5185m	>20	1	2	0
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>2	0.1	0	0
Nitration	Abs/cm	*ASTM D7624	>20	8.6	8.5	8.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.6	19.4	19.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>20	3	3	2
Boron	ppm	ASTM D5185m		<1	3	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		9	9	7
Calcium	ppm	ASTM D5185m		2555	2561	2364
Phosphorus	ppm	ASTM D5185m		440	449	402
Zinc	ppm	ASTM D5185m		509	524	475
Sulfur	ppm	ASTM D5185m		3156	3137	2905
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.7	15.6	15.5
Acid Number (AN)	mg KOH/g	ASTM D8045		1.38	1.50	1.37
Base Number (BN)	mg KOH/g	ASTM D2896	8.0	5.43	5.47	5.42
Visc @ 100°C	cSt	ASTM D445	13.2	14.3	14.1	14.1

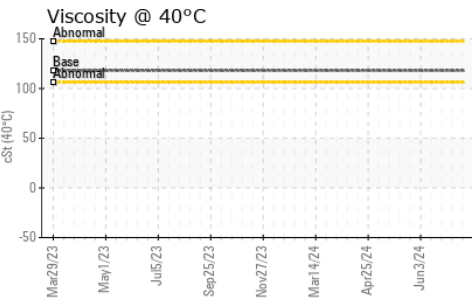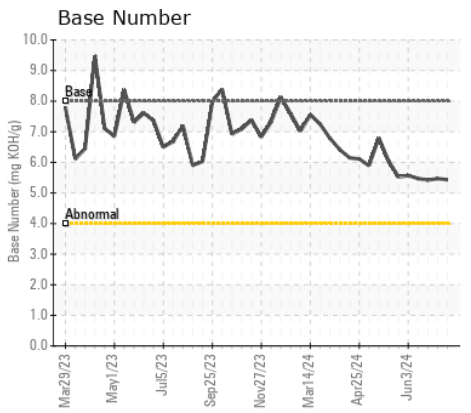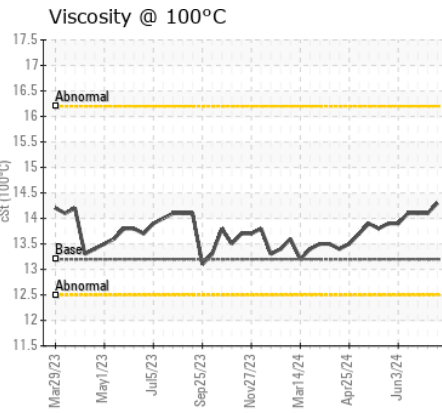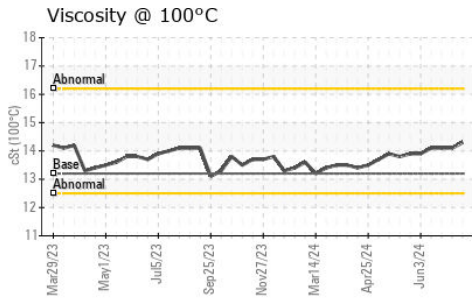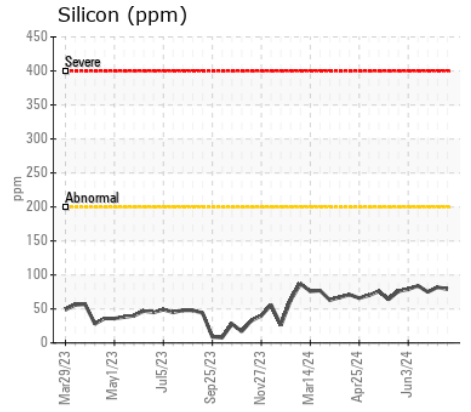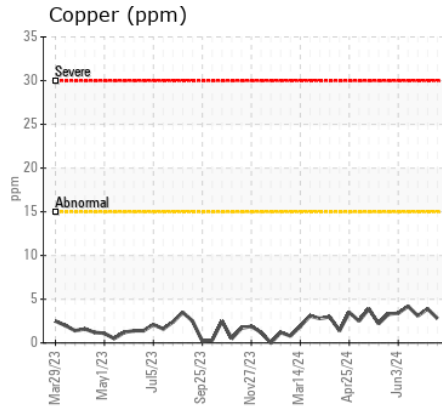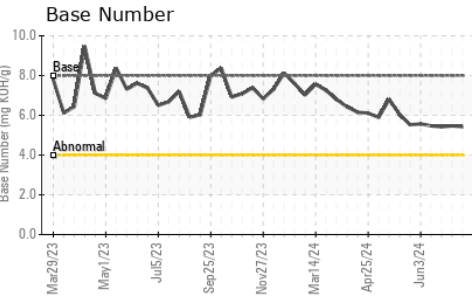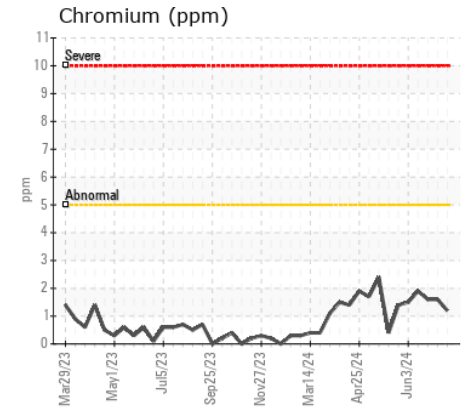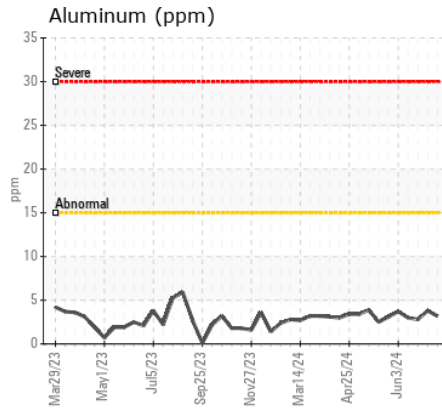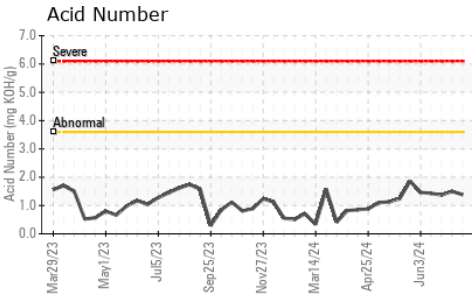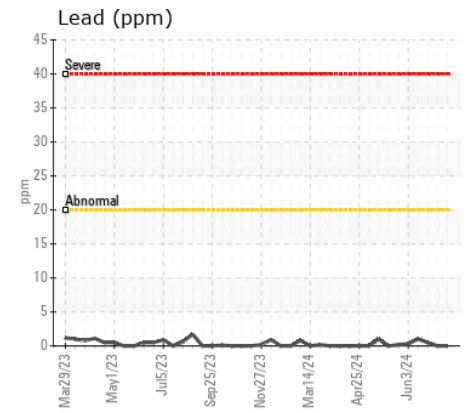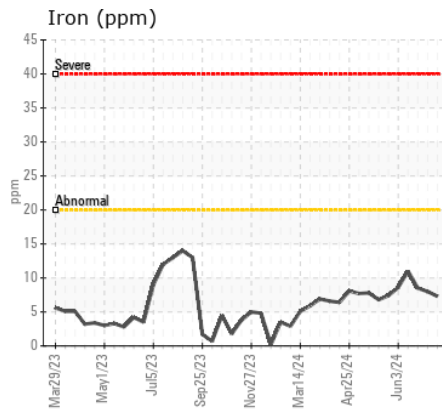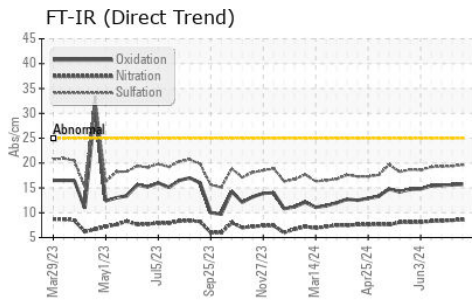

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0944679 **Received** : 02 Jul 2024
Lab Number : 06226434 **Tested** : 05 Jul 2024
Unique Number : 11109927 **Diagnosed** : 05 Jul 2024 - Don Baldridge
Test Package : MOB 2 (Additional Tests: KV40)

PINE RIDGE
 105 BAILEY JESTER RD
 GRIFFIN, GA
 US 30224
 Contact: STEPHEN SAVAGE
 stephen.savage@cubedistrictenergy.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: