



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	ATTENTION

Area

[CONHER]

Machine Id

CLAAS UM - RGMR Enciladora #2 Ac. Motor

Component

Diesel Engine

Fluid

MASSEY FERGUSEN 15W40 (45 LTR)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: Fluid: Massey Ferguson 15W-40 CF-4)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KL0014609	---	---
Sample Date		Client Info		27 Jun 2024	---	---
Machine Age	hrs	Client Info		1384	---	---
Oil Age	hrs	Client Info		394	---	---
Filter Age	hrs	Client Info		394	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	11	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>50	<1	---	---
Titanium	ppm	ASTM D5185m	>2	0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>50	2	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	2	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is a moderate amount of particulates present in the oil. Light fuel dilution occurring.

Silicon	ppm	ASTM D5185m	>25	8	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Fuel	%	ASTM D3524	>5	▲ 3.1	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.5	---	---
Nitration	Abs/cm	*ASTM D7624	>20	4.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	14.0	---	---
Particles >4µm		ASTM D7647		11220	---	---
Particles >6µm		ASTM D7647	>5000	● 6112	---	---
Particles >14µm		ASTM D7647	>640	● 1040	---	---
Particles >21µm		ASTM D7647	>160	● 350	---	---
Particles >38µm		ASTM D7647	>40	● 54	---	---
Particles >71µm		ASTM D7647	>10	6	---	---
Oil Cleanliness		ISO 4406 (c)	>19/16	● 20/17	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		7	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		31	---	---
Calcium	ppm	ASTM D5185m		3635	---	---
Phosphorus	ppm	ASTM D5185m		911	---	---
Zinc	ppm	ASTM D5185m		1048	---	---
Sulfur	ppm	ASTM D5185m		4263	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	4.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		10.62	---	---
Visc @ 100°C	cSt	ASTM D445		● 11.3	---	---

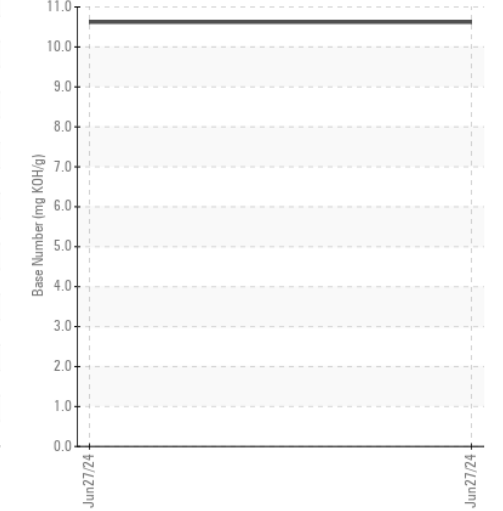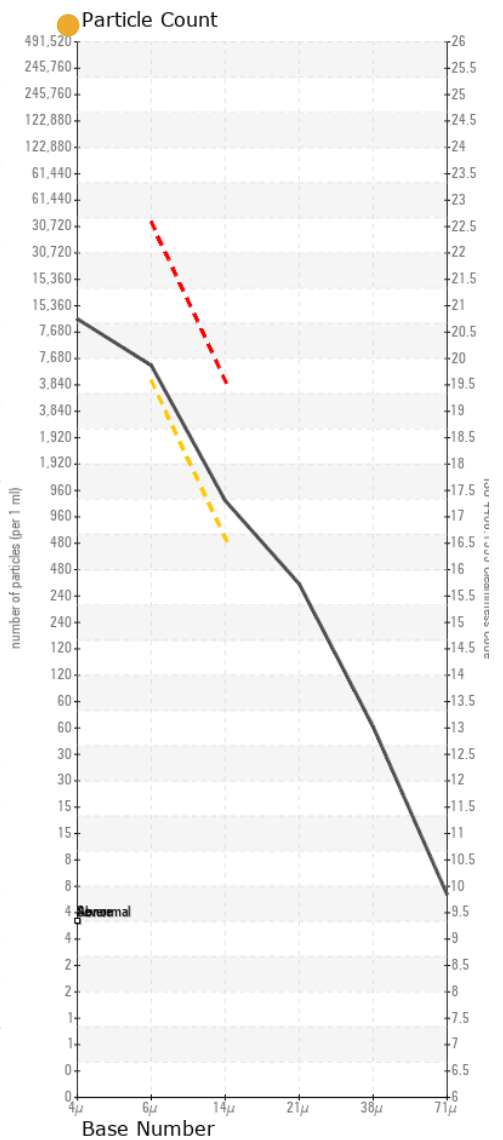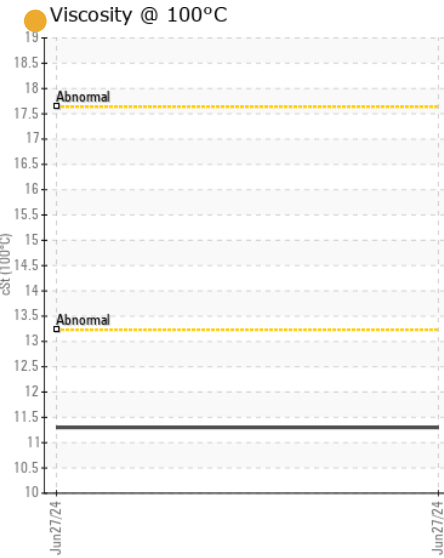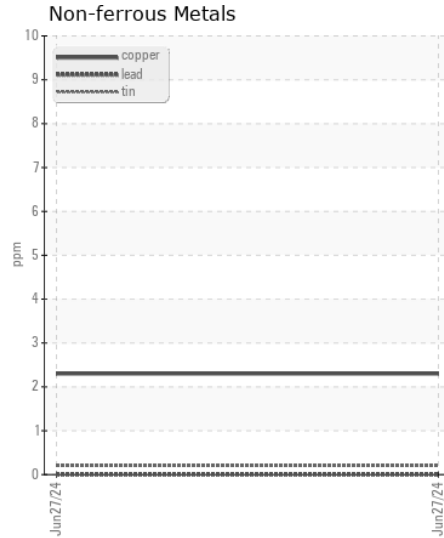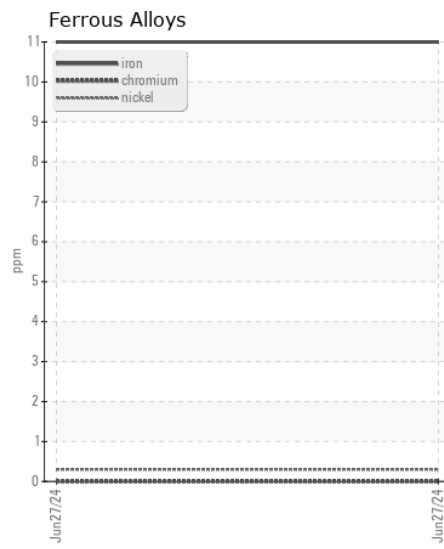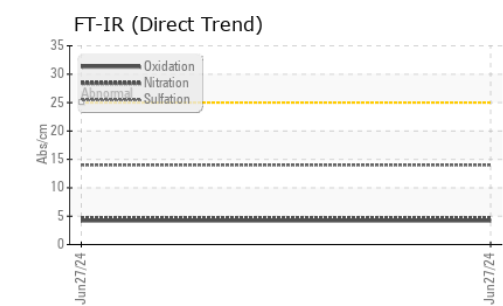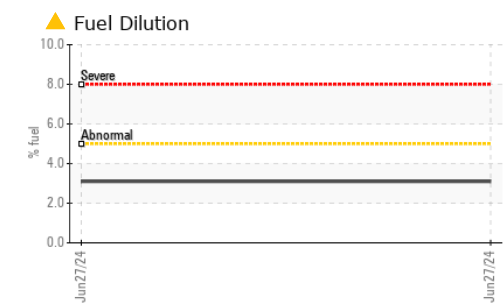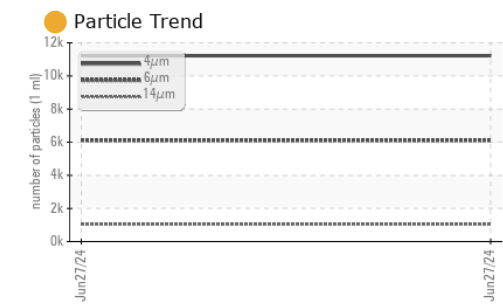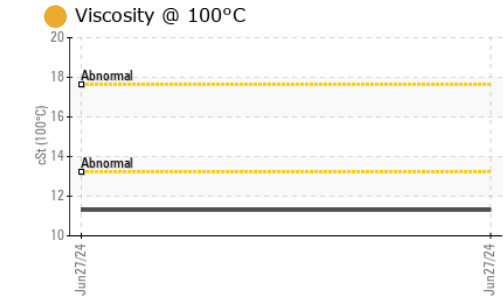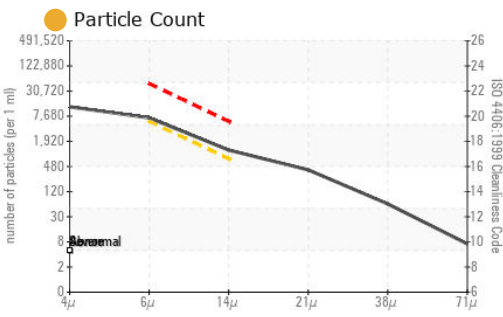

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0014609 **Received** : 02 Jul 2024
Lab Number : 06226443 **Tested** : 05 Jul 2024
Unique Number : 11109936 **Diagnosed** : 05 Jul 2024 - Don Baldrige
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel, PrtCount)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CONOR
 JUAREZ 348
 HERMOSILLO,
 MX 83140
 Contact: EDUARDO GARCIA
 egarcia.comsa@gmail.com
 T: (526)622-1581 x:81
 F: x: