



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	ABNORMAL

Area

[CONHER]

Machine Id

CLAAS UM - RGMR Enciladora #3 Ac. Motor

Component

Diesel Engine

Fluid

MASSEY FERGUSON 15W40 (45 LTR)

## RECOMMENDATION

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. ( Customer Sample Comment: Fluid: Massey Ferguson 15W-40 CF-4 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KL0014607	---	---
Sample Date		Client Info		27 Jun 2024	---	---
Machine Age	hrs	Client Info		4965	---	---
Oil Age	hrs	Client Info		1138	---	---
Filter Age	hrs	Client Info		1138	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	7	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>50	0	---	---
Titanium	ppm	ASTM D5185m	>2	0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>50	1	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	<1	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION











There is a high amount of particulates present in the oil. There is a moderate amount of fuel present in the oil.

Silicon	ppm	ASTM D5185m	>25	6	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Fuel	%	ASTM D3524	>5	▲ 5.4	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.4	---	---
Nitration	Abs/cm	*ASTM D7624	>20	4.8	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	13.5	---	---
Particles >4µm		ASTM D7647		21836	---	---
Particles >6µm		ASTM D7647	>5000	▲ 11895	---	---
Particles >14µm		ASTM D7647	>640	▲ 2024	---	---
Particles >21µm		ASTM D7647	>160	▲ 682	---	---
Particles >38µm		ASTM D7647	>40	▲ 105	---	---
Particles >71µm		ASTM D7647	>10	▲ 11	---	---
Oil Cleanliness		ISO 4406 (c)	>19/16	▲ 21/18	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m		1	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		25	---	---
Calcium	ppm	ASTM D5185m		3190	---	---
Phosphorus	ppm	ASTM D5185m		874	---	---
Zinc	ppm	ASTM D5185m		1007	---	---
Sulfur	ppm	ASTM D5185m		4056	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	4.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.79	---	---
Visc @ 100°C	cSt	ASTM D445		▲ 11.2	---	---

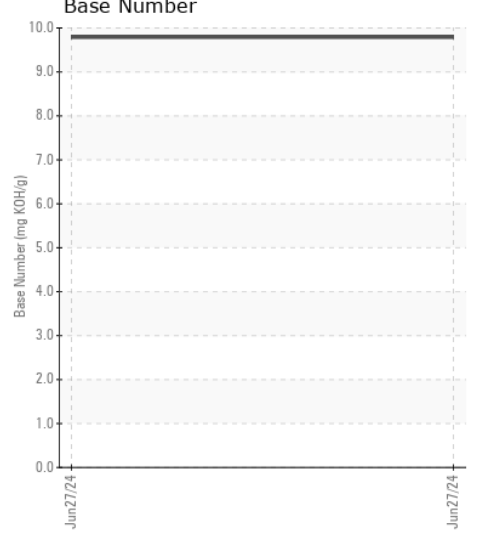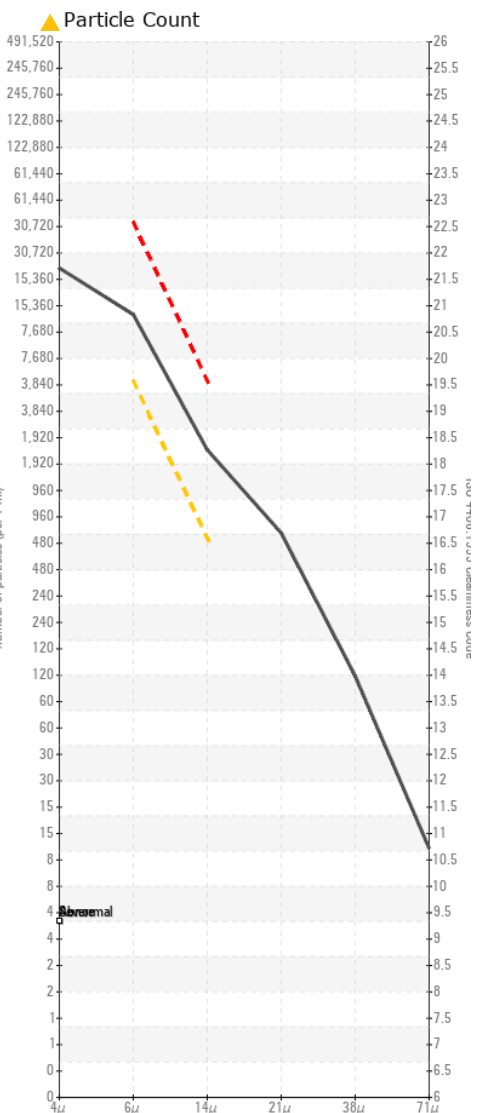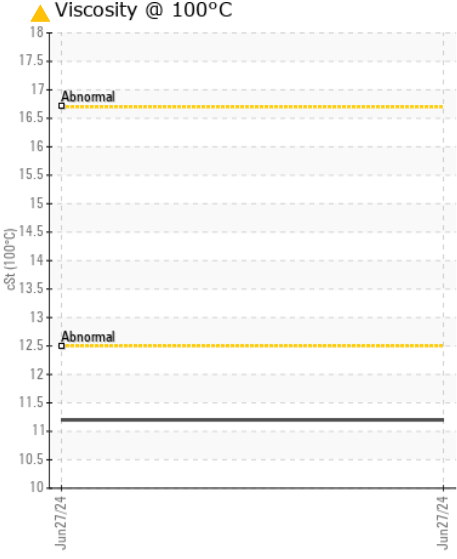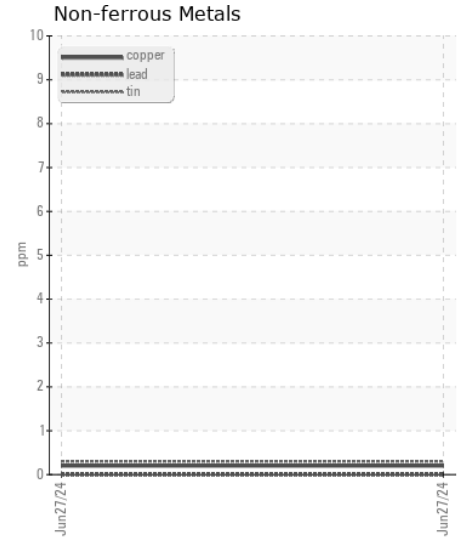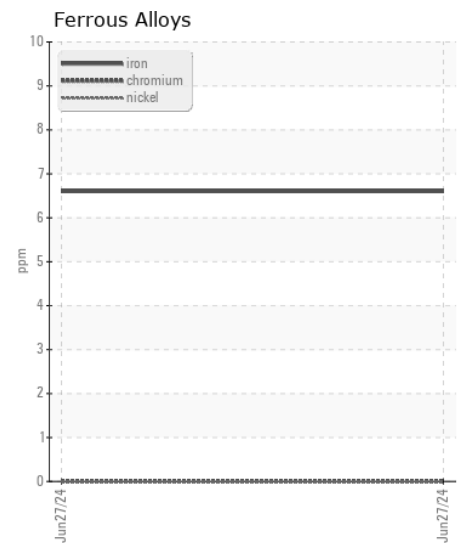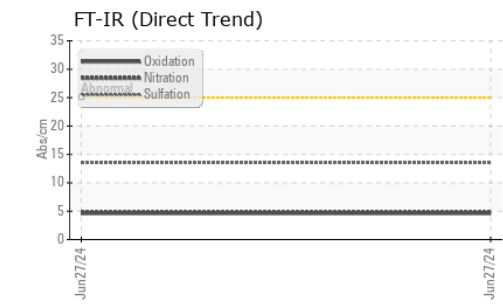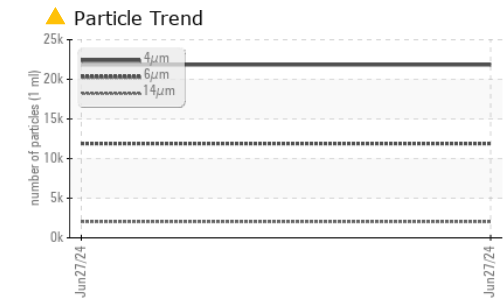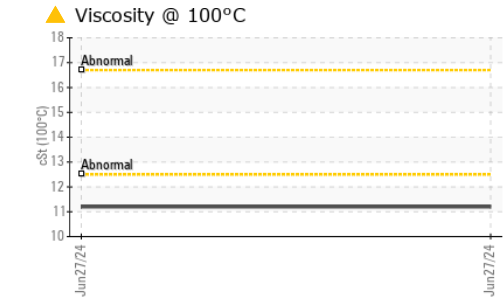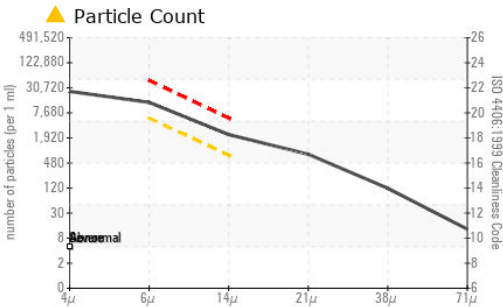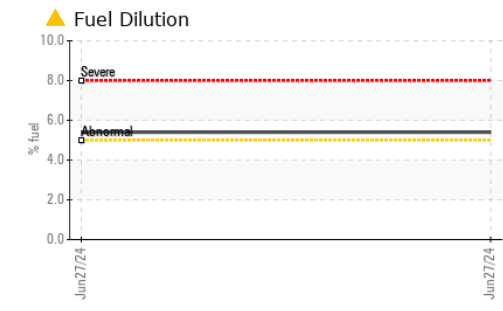

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0014607 **Received** : 02 Jul 2024  
**Lab Number** : 06226444 **Tested** : 05 Jul 2024  
**Unique Number** : 11109937 **Diagnosed** : 05 Jul 2024 - Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel, PrtCount )  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CONOR**  
 JUAREZ 348  
 HERMOSILLO,  
 MX 83140  
 Contact: EDUARDO GARCIA  
 egarcia.comsa@gmail.com  
 T: (526)622-1581 x:81  
 F: x: