



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 7760 1N07760XEE0050252

Component
Front Left Final Drive
Fluid
{not provided} (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.







CONTAMINATION

Elemental level of silicon (Si) above normal indicating ingress of seal material.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0216836	---	---
Sample Date		Client Info		01 Jul 2024	---	---
Machine Age	hrs	Client Info		2760	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---
PQ		ASTM D8184	>1250	349	---	---
Iron	ppm	ASTM D5185m	>750	233	---	---
Chromium	ppm	ASTM D5185m	>9	8	---	---
Nickel	ppm	ASTM D5185m	>10	1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	3	---	---
Lead	ppm	ASTM D5185m	>15	0	---	---
Copper	ppm	ASTM D5185m	>40	<1	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>75	▲ 108	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---
Sodium	ppm	ASTM D5185m	>51	0	---	---
Boron	ppm	ASTM D5185m		215	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		7	---	---
Magnesium	ppm	ASTM D5185m		<1	---	---
Calcium	ppm	ASTM D5185m		135	---	---
Phosphorus	ppm	ASTM D5185m		1119	---	---
Zinc	ppm	ASTM D5185m		47	---	---
Sulfur	ppm	ASTM D5185m		19889	---	---
Visc @ 40°C	cSt	ASTM D445		415	---	---

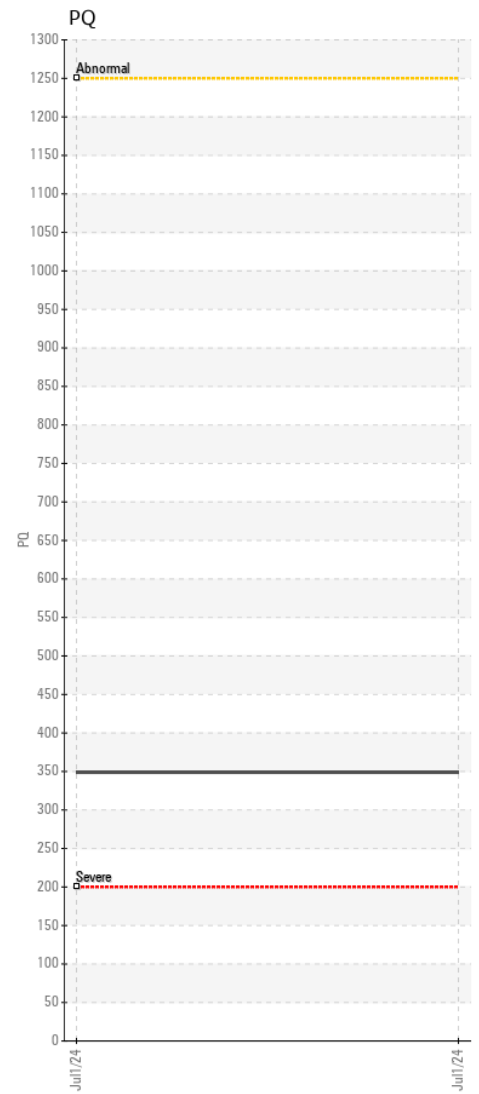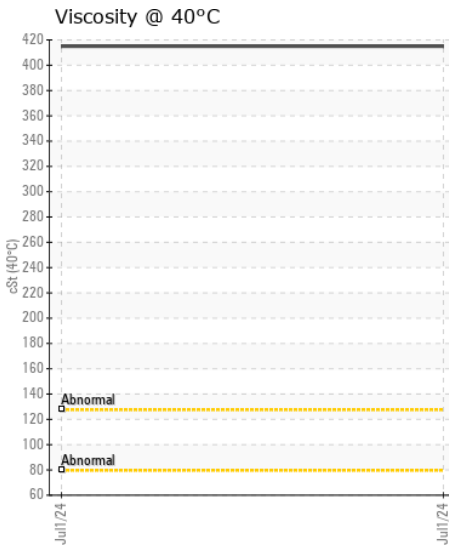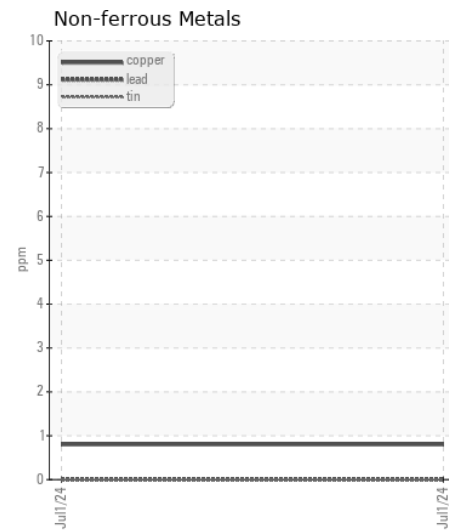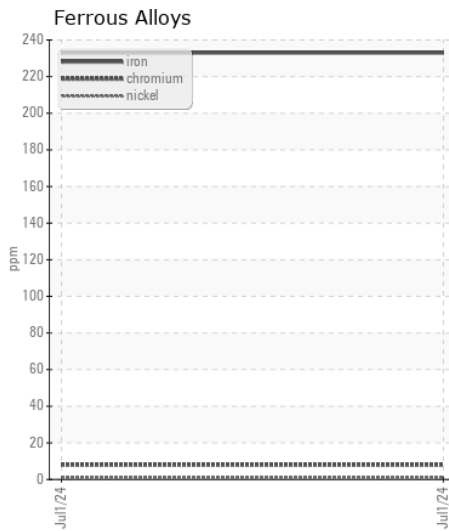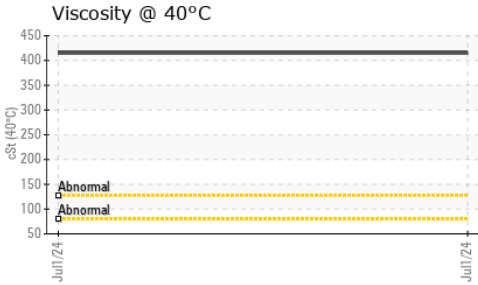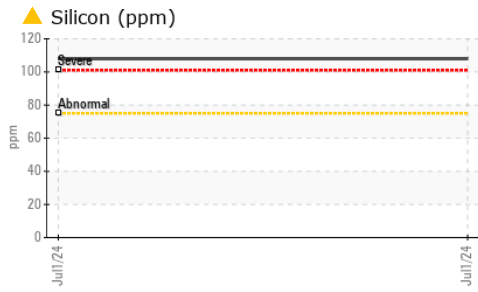

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0216836 **Received** : 02 Jul 2024
Lab Number : 06226536 **Tested** : 03 Jul 2024
Unique Number : 11110029 **Diagnosed** : 05 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - WAKEFIELD
 10489 GENERAL MAHONE HWY
 WAKEFIELD, VA
 US 23888
 Contact: BILL ACKER
 backer@jamesriverequipment.com
 T: (757)899-3232
 F: (757)899-6464