



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[W9131]**

Machine Id

**JOHN DEERE 750L 1DW750LXANF429592**

Component

**Left Inner Final Drive**

Fluid

**JOHN DEERE HY-GARD HYD/TRANS (4 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. ( Customer Sample Comment: W9131 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0197261</b>	JR0197198	---
Sample Date		Client Info		<b>01 Jul 2024</b>	19 Apr 2024	---
Machine Age	hrs	Client Info		<b>3496</b>	2968	---
Oil Age	hrs	Client Info		<b>583</b>	2968	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changed</b>	N/A	---
Filter Changed		Client Info		<b>Not Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>21</b>	31	---
Iron	ppm	ASTM D5185m	>750	<b>12</b>	31	---
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>40	<b>3</b>	2	---
Lead	ppm	ASTM D5185m	>15	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>40	<b>0</b>	<1	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>6</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	---
Water		WC Method	>0.075	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>0</b>	<1	---
Boron	ppm	ASTM D5185m	6	<b>2</b>	8	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	5	---
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m	145	<b>95</b>	116	---
Calcium	ppm	ASTM D5185m	3570	<b>3479</b>	3454	---
Phosphorus	ppm	ASTM D5185m	1290	<b>1111</b>	1120	---
Zinc	ppm	ASTM D5185m	1640	<b>1296</b>	1283	---
Sulfur	ppm	ASTM D5185m		<b>3739</b>	4720	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>50.6</b>	51.5	---

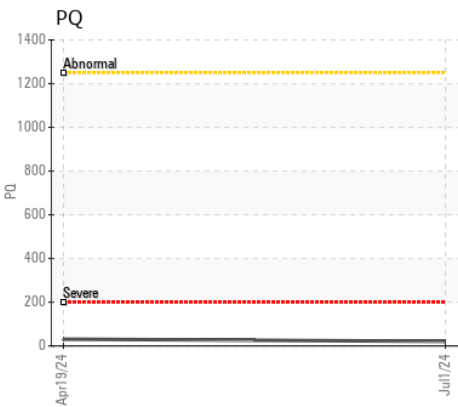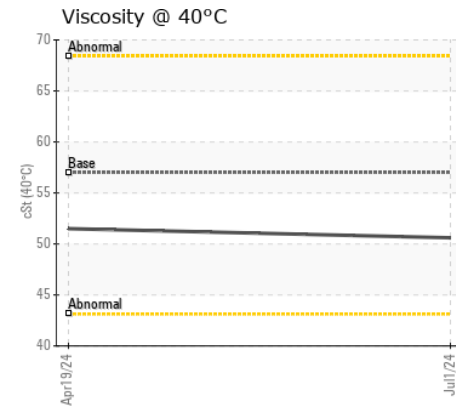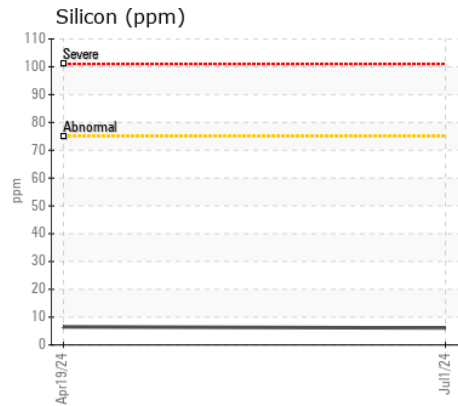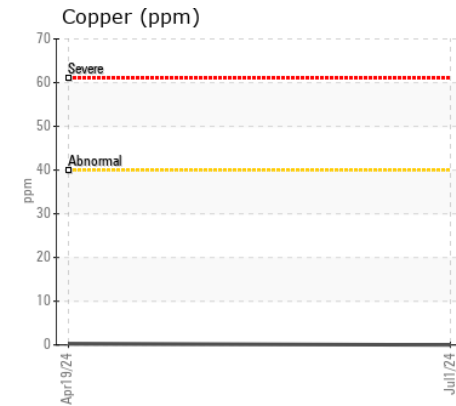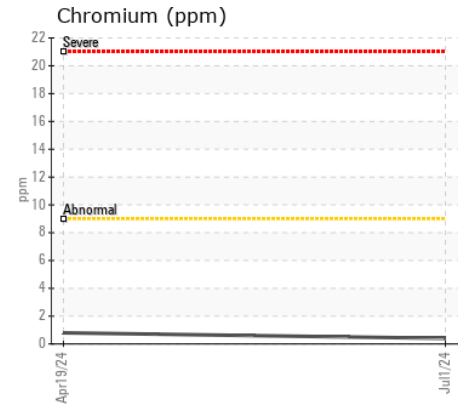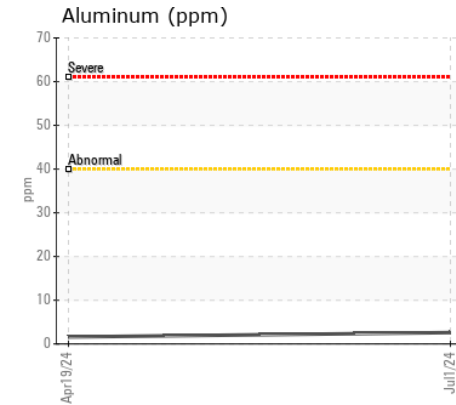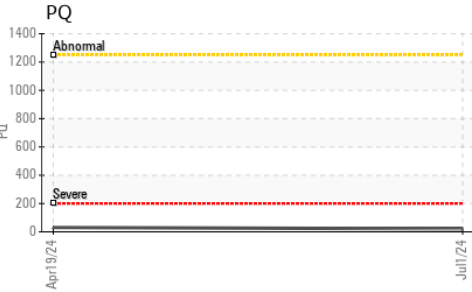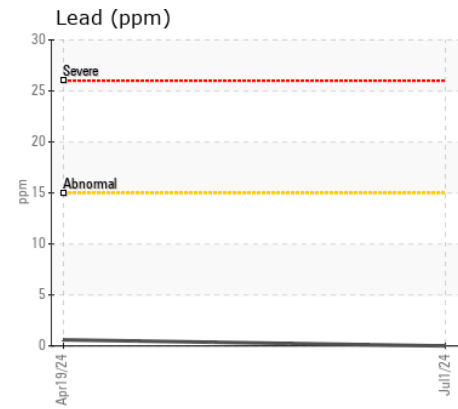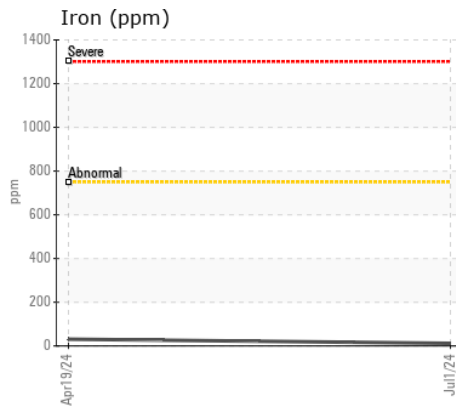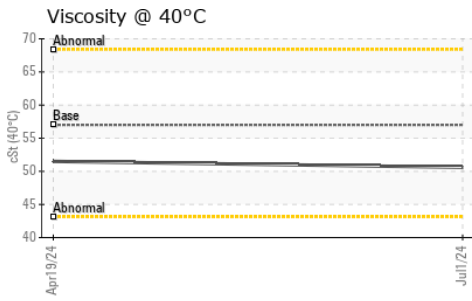

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0197261

**Lab Number** : 06226553

**Unique Number** : 11110046

**Test Package** : MOBCE ( Additional Tests: PQ )

**Received** : 02 Jul 2024

**Tested** : 03 Jul 2024

**Diagnosed** : 05 Jul 2024 - Don Baldrige

**JRE - HOPE MILLS/FAYETTEVILLE**

5039 HWY 301 SOUTH

HOPE MILLS, NC

US 28348

Contact: FAYETTEVILLE SHOP

stephen.mullis@jamesriverequipment.com;canastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: