



WEAR	SEVERE
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

DAVE DAVENPORT [6748]

Machine Id

TWIN DISC MG-3050-A 6KH367 - INBOARD

Component

Port Gearbox

Fluid

{not provided} (--- QTS)

RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

WEAR

Clutch wear is indicated.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION












The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA052771	---	---
Sample Date		Client Info		28 Jun 2024	---	---
Machine Age	hrs	Client Info		1502	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				SEVERE	---	---

PQ		ASTM D8184		89	---	---
Iron	ppm	ASTM D5185m	>200	111	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>25	3	---	---
Lead	ppm	ASTM D5185m	>50	▲ 650	---	---
Copper	ppm	ASTM D5185m	>200	▲ 341	---	---
Tin	ppm	ASTM D5185m	>10	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

Silicon	ppm	ASTM D5185m	>50	3	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		34	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		21	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		3	---	---
Calcium	ppm	ASTM D5185m		2761	---	---
Phosphorus	ppm	ASTM D5185m		1169	---	---
Zinc	ppm	ASTM D5185m		1258	---	---
Sulfur	ppm	ASTM D5185m		4964	---	---
Visc @ 40°C	cSt	ASTM D445		122	---	---

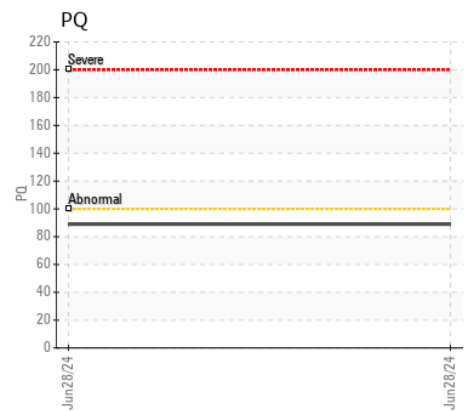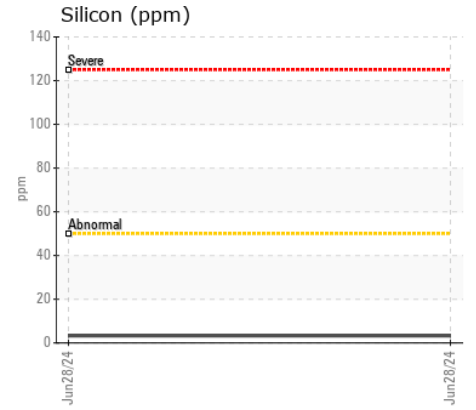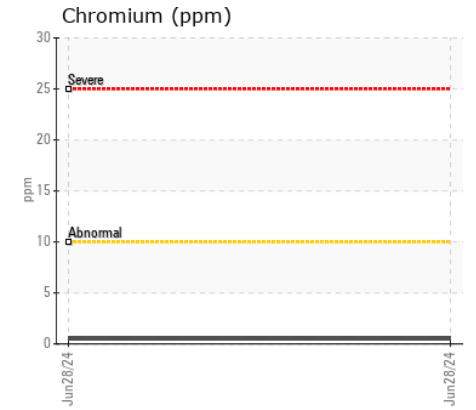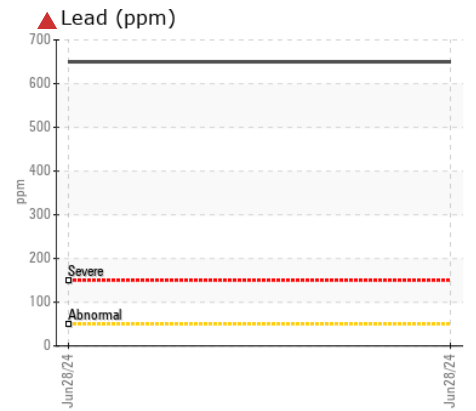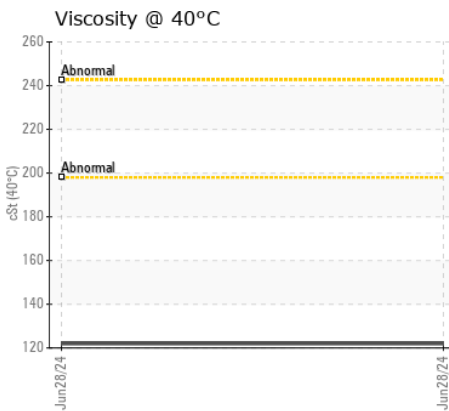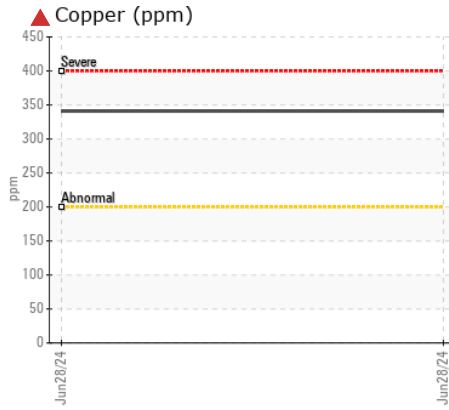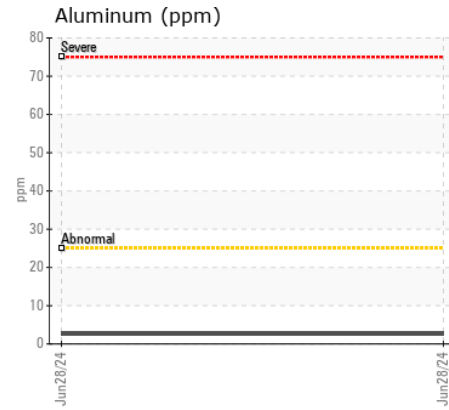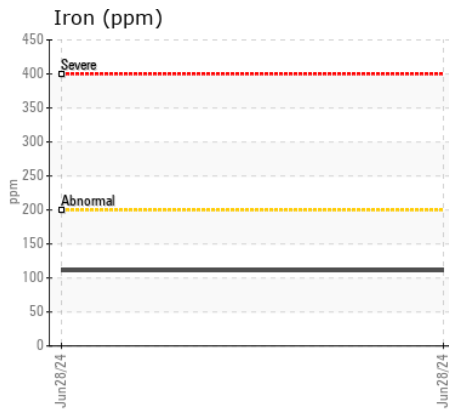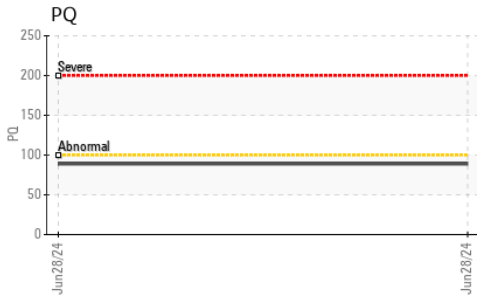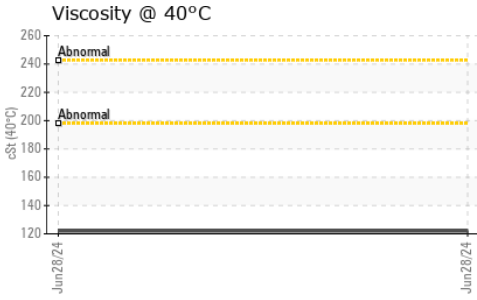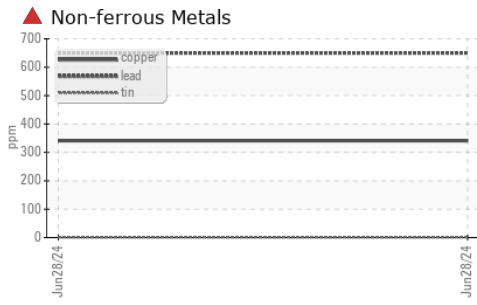

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA052771 **Received** : 02 Jul 2024
Lab Number : 06226567 **Tested** : 03 Jul 2024
Unique Number : 11110060 **Diagnosed** : 05 Jul 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: PQ)

Northwest Diesel Power
 1325 ROEDER AVE SUITE 103
 BELLINGHAM, WA
 US 98225
 Contact: BRANDON ROBERTSON
 parts@nwdieselpower.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: