



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PETERBILT 9571482
Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER15W40 (45 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0018011	RPL0015895	---
Sample Date		Client Info		24 Jun 2024	21 Mar 2024	---
Machine Age	hrs	Client Info		359658	353299	---
Oil Age	hrs	Client Info		6359	30000	---
Filter Age	hrs	Client Info		6359	30000	---
Oil Changed		Client Info		Not Changd	Changed	---
Filter Changed		Client Info		Not Changd	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	7	8	---
Chromium	ppm	ASTM D5185m	>4	<1	<1	---
Nickel	ppm	ASTM D5185m	>2	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>25	3	3	---
Lead	ppm	ASTM D5185m	>45	0	1	---
Copper	ppm	ASTM D5185m	>85	<1	2	---
Tin	ppm	ASTM D5185m	>4	0	1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	7	7	---
Potassium	ppm	ASTM D5185m	>20	2	3	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	7.9	9.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.3	21.1	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	1	---
Boron	ppm	ASTM D5185m	0	81	26	---
Barium	ppm	ASTM D5185m	0	0	<1	---
Molybdenum	ppm	ASTM D5185m	0	117	102	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m	0	656	685	---
Calcium	ppm	ASTM D5185m		1266	1241	---
Phosphorus	ppm	ASTM D5185m		745	831	---
Zinc	ppm	ASTM D5185m		892	936	---
Sulfur	ppm	ASTM D5185m		2745	2797	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.5	18.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	7.2	5.6	---
Visc @ 100°C	cSt	ASTM D445	14	12.7	13.3	---

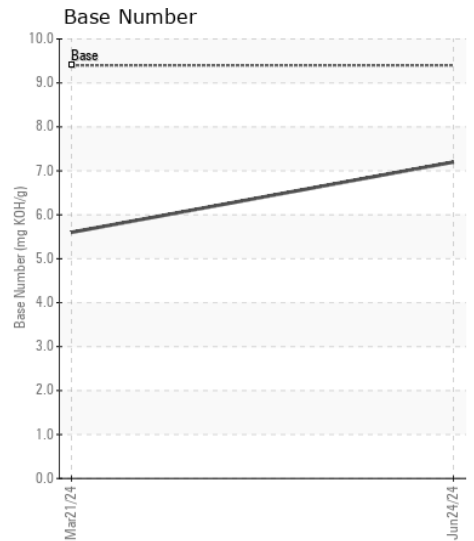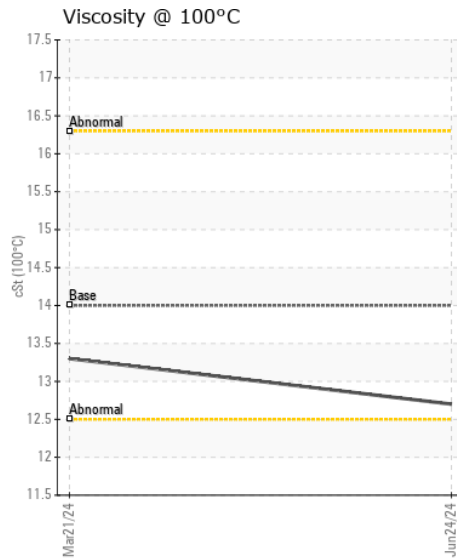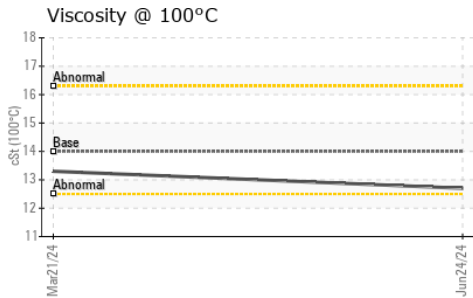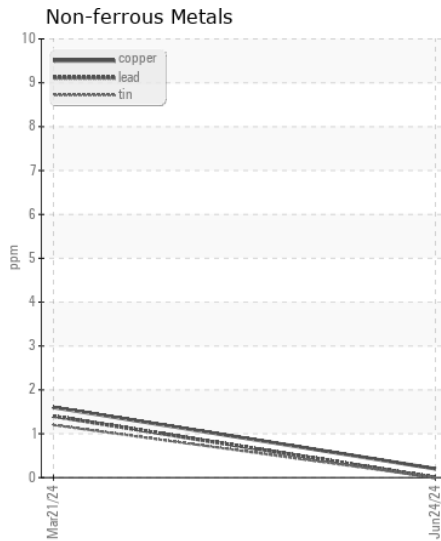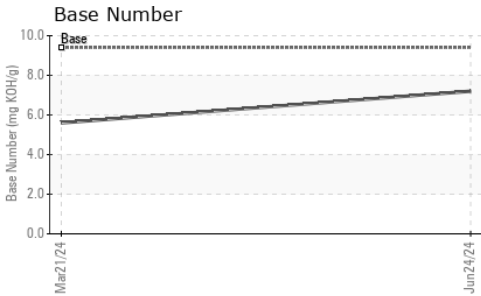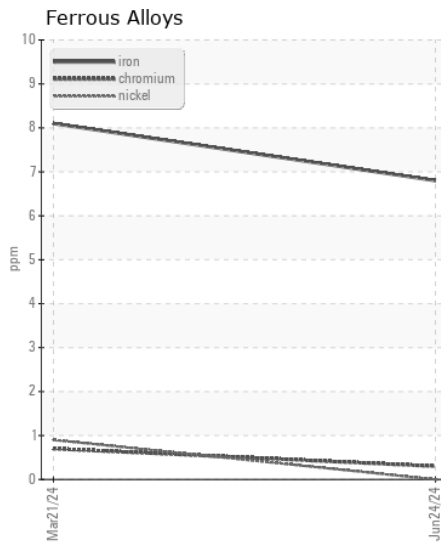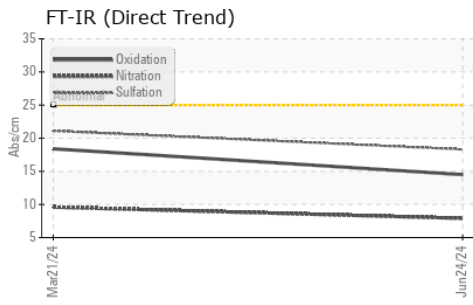

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0018011 **Received** : 03 Jul 2024
Lab Number : 06227096 **Tested** : 05 Jul 2024
Unique Number : 11110589 **Diagnosed** : 05 Jul 2024 - Wes Davis
Test Package : FLEET

RTL PACLEASE - 7004 - Austin
 1205 Smith Road
 Austin, TX
 US 78721
 Contact: David Johnson
 JohnsonD@RushEnterprises.com
 T: (512)401-7063
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)