



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area

(DXE795)

Machine Id

10590

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | GFL0111452 | GFL0068826 | GFL0068907 |
| Sample Date | | Client Info | | 28 Jun 2024 | 11 Mar 2024 | 01 Mar 2024 |
| Machine Age | hrs | Client Info | | 18279 | 18023 | 17907 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Not Changd | Not Changd | Not Changd |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | MARGINAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >100 | 18 | 19 | 16 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >4 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 3 | 3 | 3 |
| Lead | ppm | ASTM D5185m | >40 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >330 | 1 | 1 | <1 |
| Tin | ppm | ASTM D5185m | >15 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION








There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >25 | 8 | 9 | 8 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 1 | 1 |
| Fuel | | WC Method | >5 | <1.0 | <1.0 | ▲ 4.9 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >3 | 0.5 | 0.7 | 0.6 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 7.6 | 9.1 | 9.2 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 18.7 | 19.1 | 18.8 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|------|------|
| Sodium | ppm | ASTM D5185m | | 6 | 4 | 5 |
| Boron | ppm | ASTM D5185m | 0 | 10 | 5 | 2 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 60 | 56 | 53 | 54 |
| Manganese | ppm | ASTM D5185m | 0 | 0 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 1010 | 898 | 861 | 869 |
| Calcium | ppm | ASTM D5185m | 1070 | 1028 | 961 | 969 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 1014 | 954 | 918 |
| Zinc | ppm | ASTM D5185m | 1270 | 1227 | 1146 | 1091 |
| Sulfur | ppm | ASTM D5185m | 2060 | 2833 | 2837 | 2757 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 14.4 | 16.0 | 15.8 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 8.6 | 7.9 | 7.9 |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.6 | 13.0 | 12.4 |

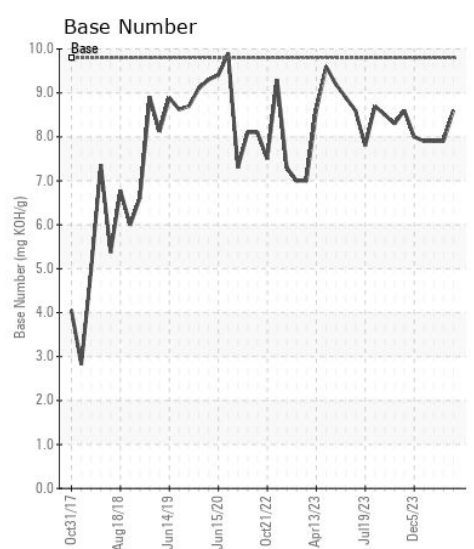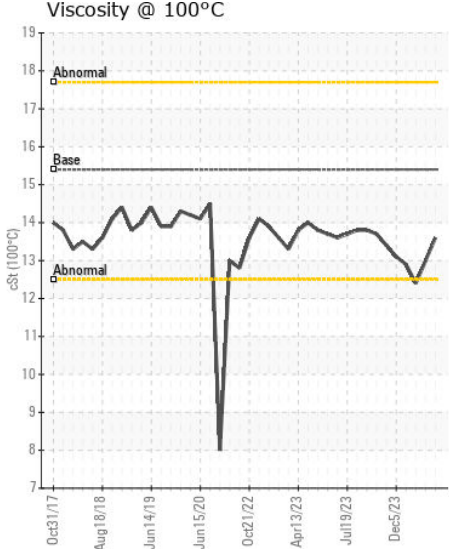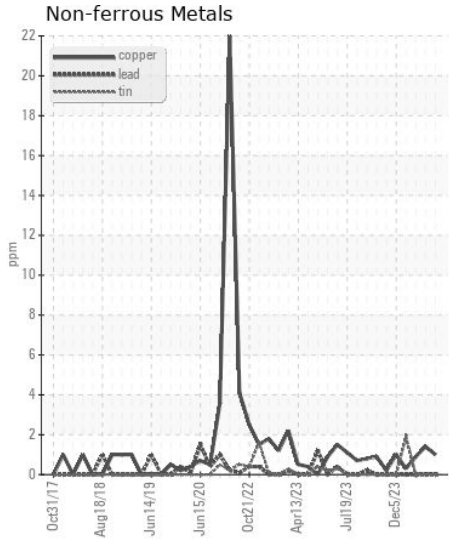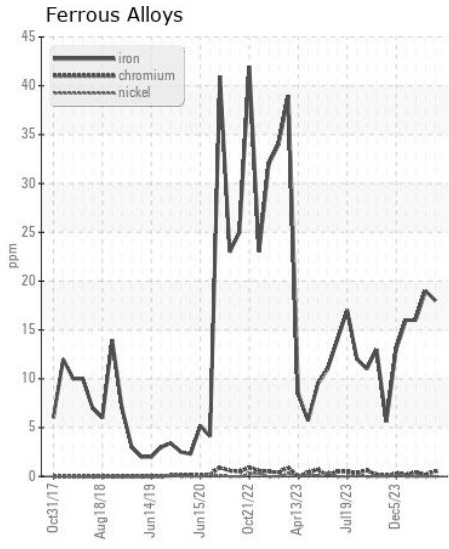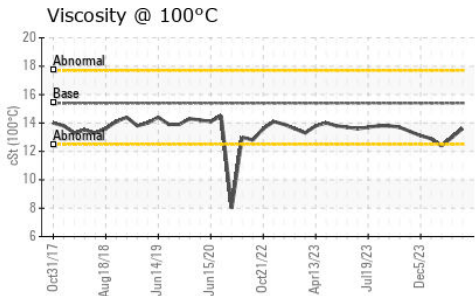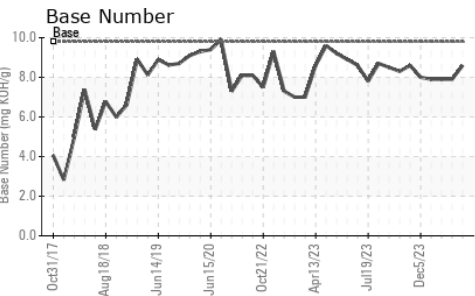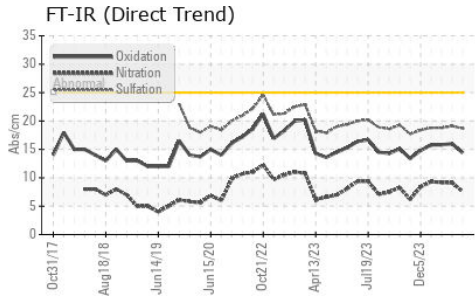

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0111452
Lab Number : 06227103
Unique Number : 11110596
Test Package : FLEET
Received : 03 Jul 2024
Tested : 05 Jul 2024
Diagnosed : 05 Jul 2024 - Wes Davis

GFL Environmental - 073 - Warner Robins - Transwaste
 155 Story Road
 Warner Robins, GA
 US 31093
 Contact: JOSH MALONEY
 jmaloney@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)