



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
HARVEST PRIDE

Machine Id

HPR

Component

Starboard Main Engine

Fluid

CHEVRON DELO 400 MULTIGRADE 15W40 (50 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0063938	MW0063842	MW0054614
Sample Date		Client Info		25 Jun 2024	10 May 2024	27 Mar 2024
Machine Age	hrs	Client Info		39434	38525	37709
Oil Age	hrs	Client Info		859	866	963
Filter Age	hrs	Client Info		859	866	963
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	9	2	2
Chromium	ppm	ASTM D5185m	>8	0	0	0
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>3	12	13	16
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	<1	1
Lead	ppm	ASTM D5185m	>18	0	0	0
Copper	ppm	ASTM D5185m	>80	0	0	<1
Tin	ppm	ASTM D5185m	>14	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	4	3	3
Potassium	ppm	ASTM D5185m	>20	2	<1	2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.2	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	7.7	7.7	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.1	18.2	18.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	3	2	3
Boron	ppm	ASTM D5185m	151	90	99	93
Barium	ppm	ASTM D5185m	0.4	0	0	0
Molybdenum	ppm	ASTM D5185m	250	45	32	29
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	0	730	677	763
Calcium	ppm	ASTM D5185m	2046	1498	1380	1594
Phosphorus	ppm	ASTM D5185m	1043	718	626	697
Zinc	ppm	ASTM D5185m	943	803	733	857
Sulfur	ppm	ASTM D5185m	5012	3572	3188	3768
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.8	12.7	12.8
Base Number (BN)	mg KOH/g	ASTM D2896	12.5	8.2	8.2	8.6
Visc @ 100°C	cSt	ASTM D445	14.4	13.7	13.7	13.7


FT-IR (Direct Trend)

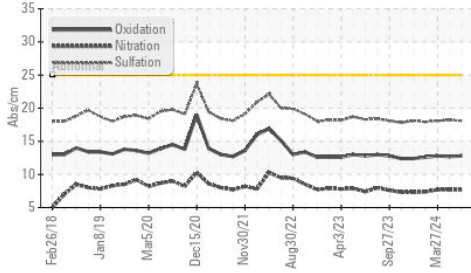


Base Number

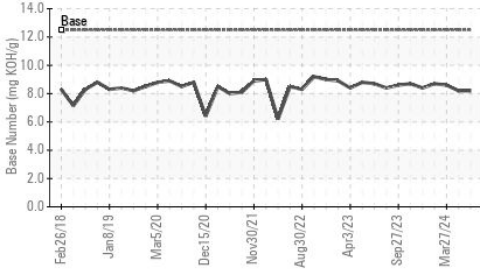


Viscosity @ 100°C

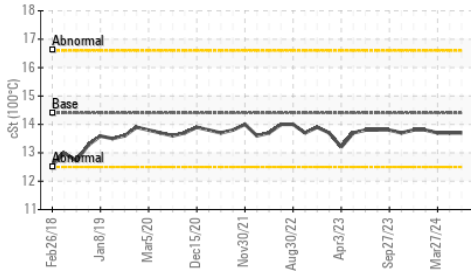


Ferrous Alloys

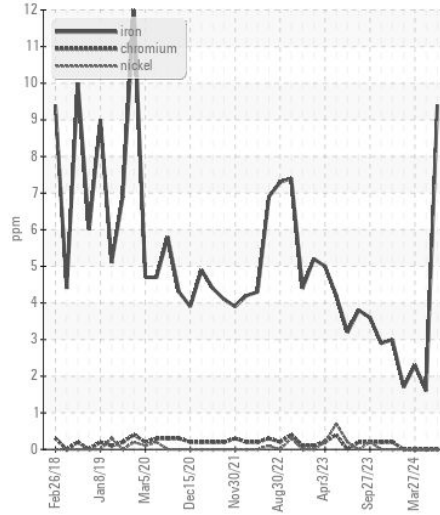


Non-ferrous Metals

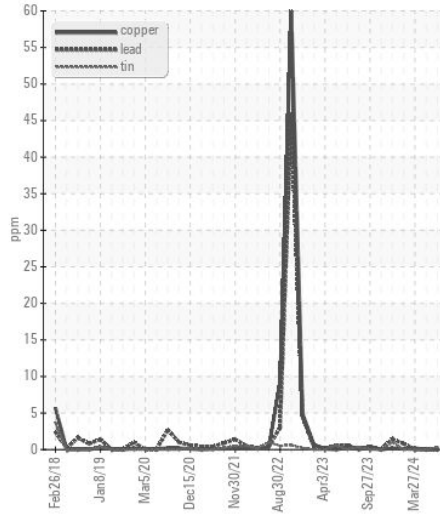

Viscosity @ 100°C

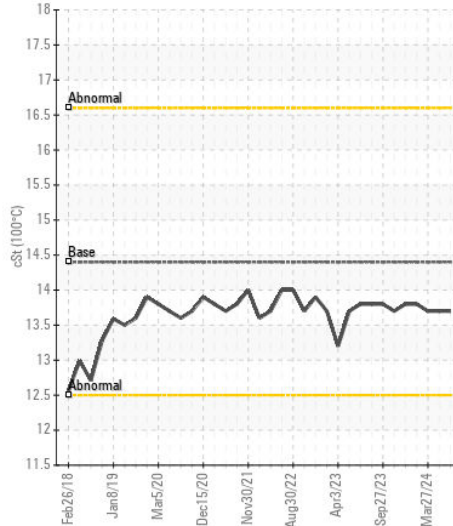

Base Number

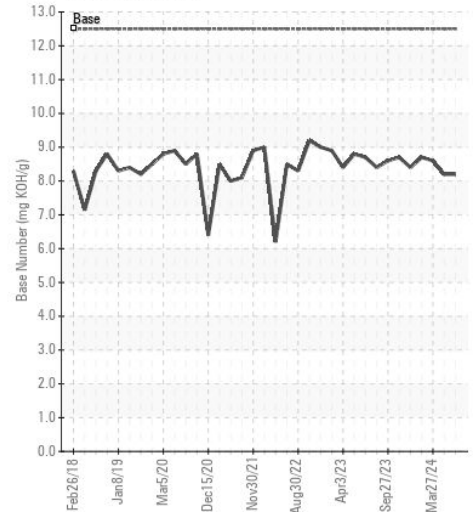

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0063938
Lab Number : 06227149
Unique Number : 11110642
Test Package : MAR 2

Received : 03 Jul 2024
Tested : 05 Jul 2024
Diagnosed : 05 Jul 2024 - Wes Davis

AMERICAN RIVER TRANSPORTATION CO.
 P.O. BOX 2889
 ST. LOUIS, MO
 US 63111
 Contact: BRIAN GRIEWING
 brian.griewing@adm.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (314)481-5278