



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Store 5 - Cross Lanes [RO#152318]

Machine Id
SKYTRAC 8042 0160098598

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (13 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0051152	LEC0036882	LEC0024394
Sample Date		Client Info		24 Jun 2024	29 Nov 2022	09 Nov 2021
Machine Age	hrs	Client Info		1218	883	502
Oil Age	hrs	Client Info		335	381	502
Filter Age	hrs	Client Info		335	381	502
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	37	36	84
Chromium	ppm	ASTM D5185m	>20	<1	1	3
Nickel	ppm	ASTM D5185m	>4	0	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	5
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	34	19	19
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>330	4	13	75
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>120	7	7	12
Potassium	ppm	ASTM D5185m	>20	3	<1	12
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.0	8.8	7.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.4	23.3	19.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	10
Boron	ppm	ASTM D5185m		227	210	38
Barium	ppm	ASTM D5185m		0	0	11
Molybdenum	ppm	ASTM D5185m		228	226	39
Manganese	ppm	ASTM D5185m		1	1	4
Magnesium	ppm	ASTM D5185m		809	832	1001
Calcium	ppm	ASTM D5185m		1451	1418	940
Phosphorus	ppm	ASTM D5185m		912	876	924
Zinc	ppm	ASTM D5185m		1075	1106	1158
Sulfur	ppm	ASTM D5185m		3615	3476	3002
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.2	16.7	14.9
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.5	9.4	7
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	13.0	11.9

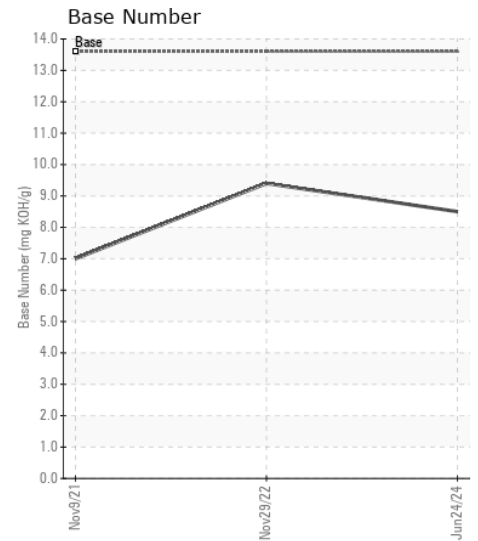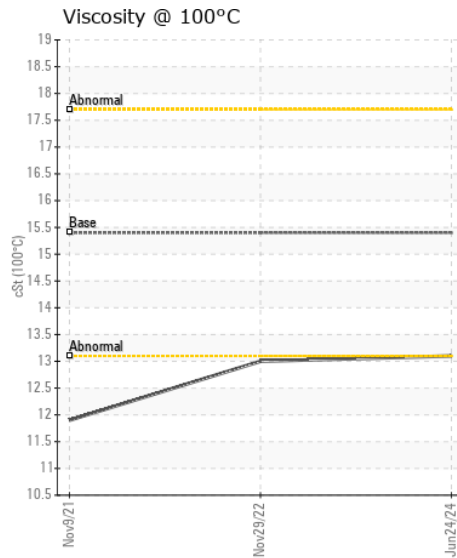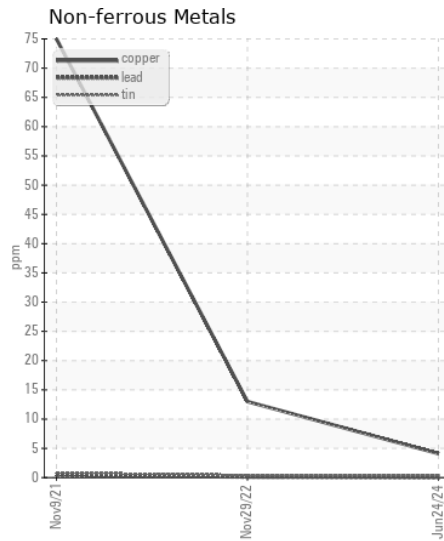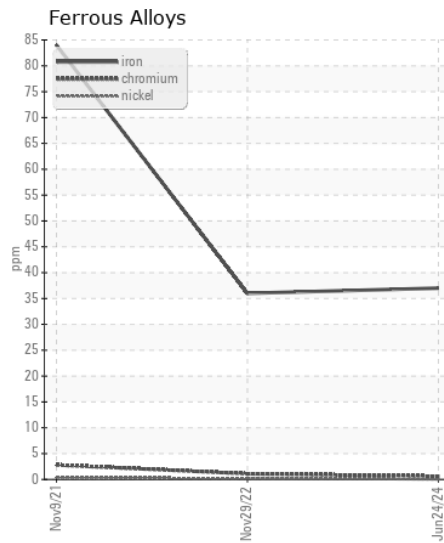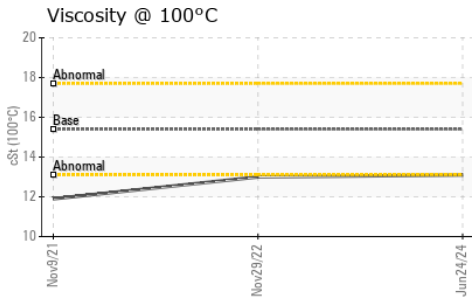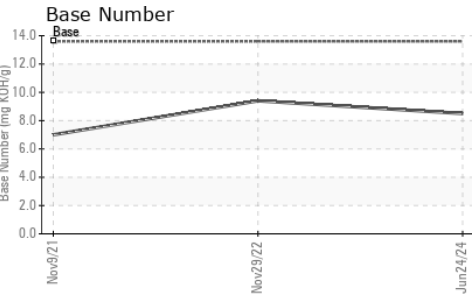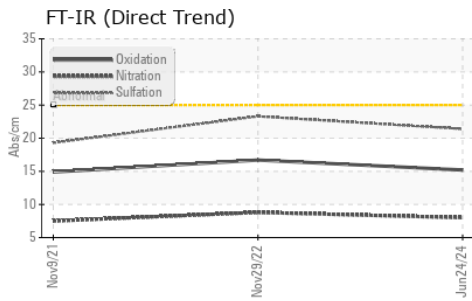

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0051152 **Received** : 03 Jul 2024
Lab Number : 06227185 **Tested** : 05 Jul 2024
Unique Number : 11110678 **Diagnosed** : 05 Jul 2024 - Angela Borella
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

T:
 F: (740)373-5570