



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL



Machine Id
JOHN DEERE 944k 1DW944KSKLF703589
Component
Diesel Engine
Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (12 GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0050042	LEC0048522	LEC0031572
Sample Date		Client Info		01 Jul 2024	05 Apr 2024	13 Nov 2023
Machine Age	hrs	Client Info		5979	5490	4978
Oil Age	hrs	Client Info		489	512	507
Filter Age	hrs	Client Info		489	512	507
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	10	20	16
Chromium	ppm	ASTM D5185m	>11	0	1	0
Nickel	ppm	ASTM D5185m	>5	0	1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>31	5	7	4
Lead	ppm	ASTM D5185m	>26	4	10	12
Copper	ppm	ASTM D5185m	>26	5	8	10
Tin	ppm	ASTM D5185m	>4	2	3	2
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>120	7	9	8
Potassium	ppm	ASTM D5185m	>20	2	4	5
Fuel	%	ASTM D3524	>8.0	4.6	4.4	6.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	0.5	0.6
Nitration	Abs/cm	*ASTM D7624	>20	9.6	9.6	10.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.8	23.8	25.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m	>31	5	6	7
Boron	ppm	ASTM D5185m		72	73	49
Barium	ppm	ASTM D5185m		0	1	<1
Molybdenum	ppm	ASTM D5185m		214	237	247
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m		792	773	829
Calcium	ppm	ASTM D5185m		1352	1344	1373
Phosphorus	ppm	ASTM D5185m		846	862	874
Zinc	ppm	ASTM D5185m		1013	1037	1061
Sulfur	ppm	ASTM D5185m		3305	3089	2952
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.7	18.5	19.8
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.4	7.8	7.5
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.8	▲ 12.0	▲ 11.9


▲ Viscosity @ 100°C

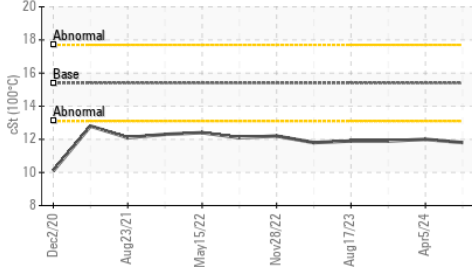


Fuel Dilution

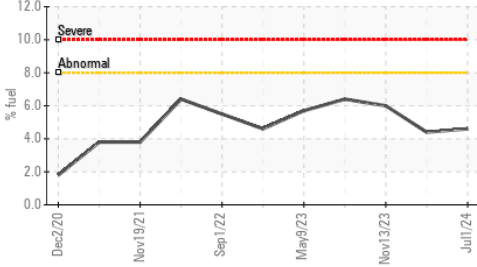


FT-IR (Direct Trend)

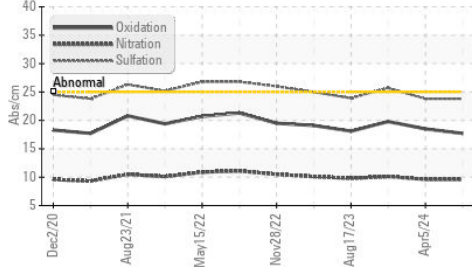


Base Number

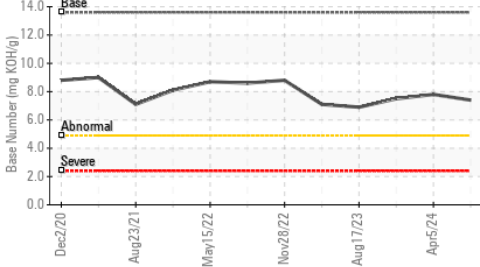


Ferrous Alloys

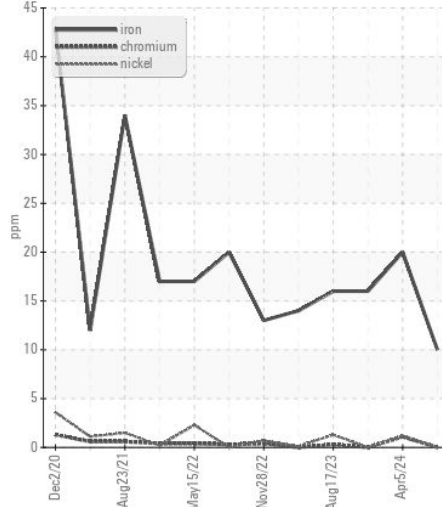


Non-ferrous Metals

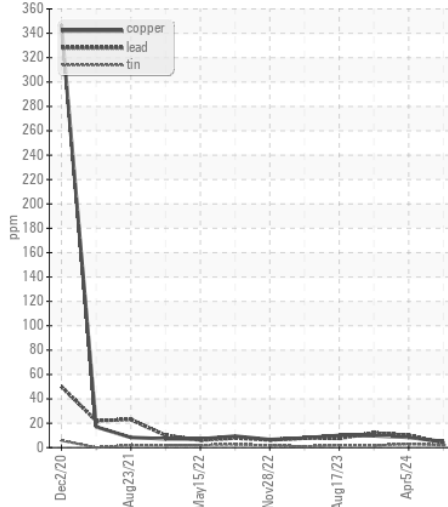

▲ Viscosity @ 100°C

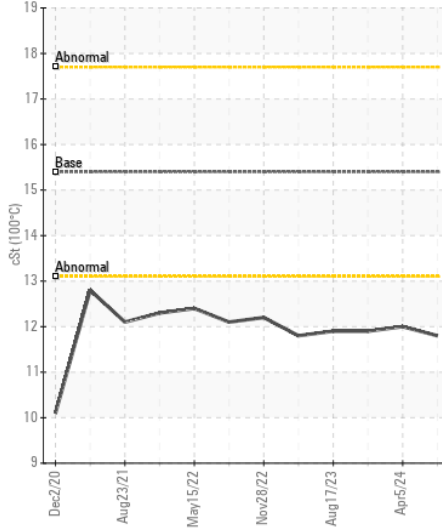

Base Number

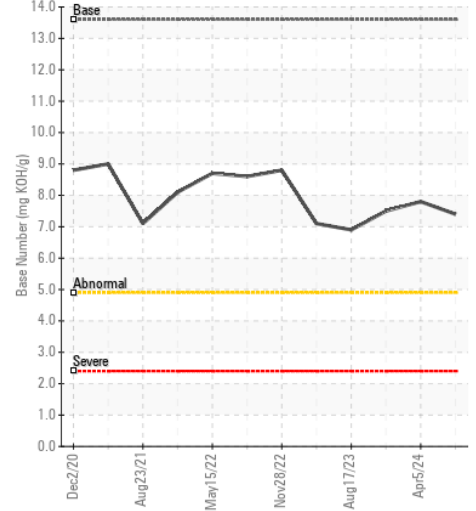

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : LEC0050042 Received : 03 Jul 2024
 Lab Number : 06227190 Tested : 09 Jul 2024
 Unique Number : 11110683 Diagnosed : 09 Jul 2024 - Jonathan Hester
 Test Package : CONST (Additional Tests: FUELDILUTION, PercentFuel, TBN)

APPALACHIAN AGGREGATES
 2950 CHARLES AVENUE
 DUNBAR, WV
 US 25064
 Contact: VERNON SPARKS
 vernon.sparks@appagg.wv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: