



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Store 3 - Norton

Machine Id
JOHN DEERE 160G EX22 (S/N HF056770)

Component
Pump Drive

Fluid
GEAR OIL SAE 90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0049339	---	---
Sample Date		Client Info		24 Jun 2024	---	---
Machine Age	hrs	Client Info		3927	---	---
Oil Age	hrs	Client Info		500	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		22	---	---
Iron	ppm	ASTM D5185m	>151	47	---	---
Chromium	ppm	ASTM D5185m	>11	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		2	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>21	6	---	---
Lead	ppm	ASTM D5185m	>51	0	---	---
Copper	ppm	ASTM D5185m	>51	0	---	---
Tin	ppm	ASTM D5185m	>4	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	19	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	2	---	---
Boron	ppm	ASTM D5185m	400	148	---	---
Barium	ppm	ASTM D5185m	200	<1	---	---
Molybdenum	ppm	ASTM D5185m	12	8	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m	12	2	---	---
Calcium	ppm	ASTM D5185m	150	355	---	---
Phosphorus	ppm	ASTM D5185m	1650	1098	---	---
Zinc	ppm	ASTM D5185m	125	121	---	---
Sulfur	ppm	ASTM D5185m	22500	13173	---	---
Visc @ 40°C	cSt	ASTM D445	183	140	---	---

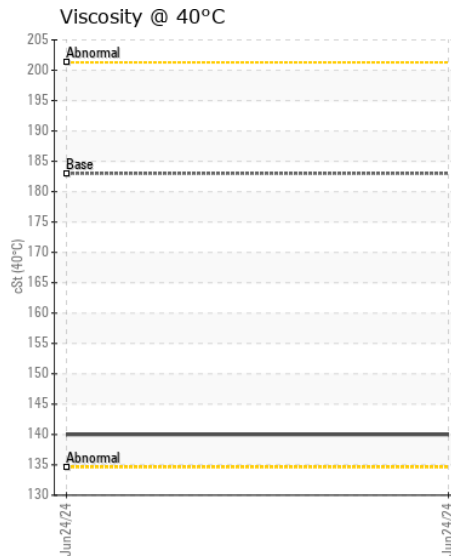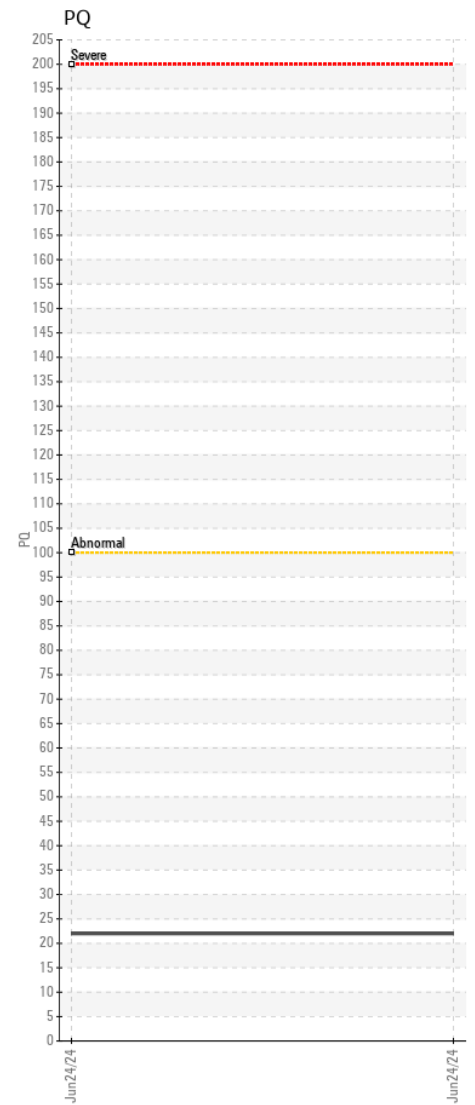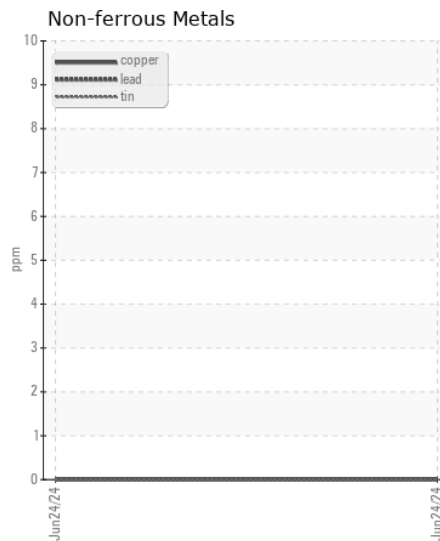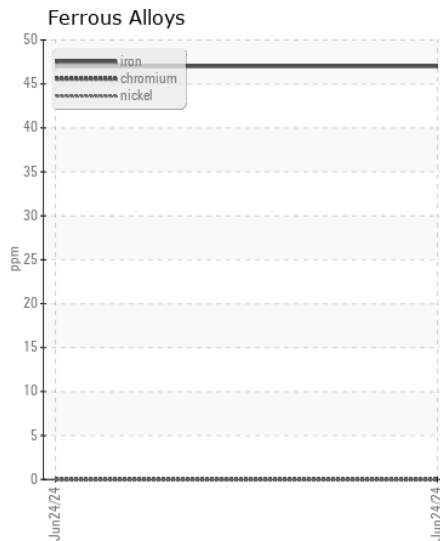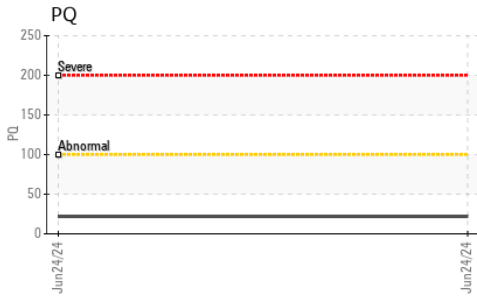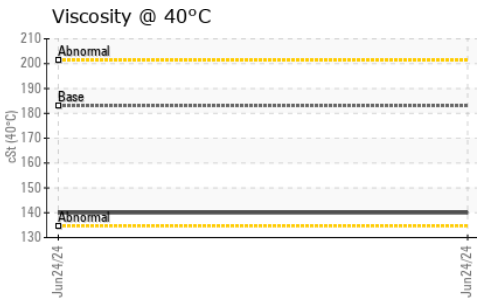

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : LEC0049339 Received : 03 Jul 2024
 Lab Number : 06227736 Tested : 05 Jul 2024
 Unique Number : 11111229 Diagnosed : 05 Jul 2024 - Wes Davis
 Test Package : CONST (Additional Tests: PQ)

LANE PIPELINE
 2946 E MAIN ST
 BRIDGEPORT, WV
 US 26330
 Contact: JESSE WILBURN
 jessewilburn@gmail.com
 T: (740)440-0927
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)