



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**Store 3 - Norton**  
Machine Id  
**JOHN DEERE 750K D14 (S/N 1T0750KXCJF329221)**  
Component  
**Rear Right Final Drive**  
Fluid  
**GEAR OIL SAE 90 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0049316</b>	LEC0040106	---
Sample Date		Client Info		<b>14 Jun 2024</b>	10 Apr 2023	---
Machine Age	hrs	Client Info		<b>4797</b>	3942	---
Oil Age	hrs	Client Info		<b>1000</b>	1000	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	ATTENTION	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>76</b>	198	---
Iron	ppm	ASTM D5185m	>750	<b>115</b>	444	---
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	4	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	2	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>40	<b>2</b>	6	---
Lead	ppm	ASTM D5185m	>15	<b>0</b>	4	---
Copper	ppm	ASTM D5185m	>40	<b>0</b>	1	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>10</b>	25	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	5	---
Water		WC Method	>0.075	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>2</b>	2	---
Boron	ppm	ASTM D5185m	400	<b>107</b>	9	---
Barium	ppm	ASTM D5185m	200	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	12	<b>0</b>	1	---
Manganese	ppm	ASTM D5185m		<b>2</b>	4	---
Magnesium	ppm	ASTM D5185m	12	<b>4</b>	93	---
Calcium	ppm	ASTM D5185m	150	<b>70</b>	3001	---
Phosphorus	ppm	ASTM D5185m	1650	<b>1073</b>	1025	---
Zinc	ppm	ASTM D5185m	125	<b>46</b>	1178	---
Sulfur	ppm	ASTM D5185m	22500	<b>22158</b>	5986	---
Visc @ 40°C	cSt	ASTM D445	183	<b>131</b>	52.7	---

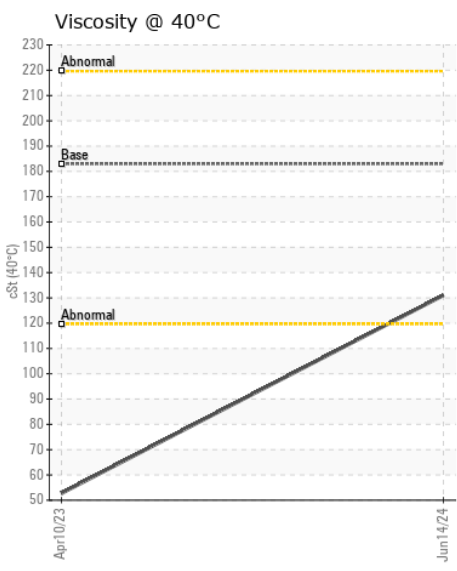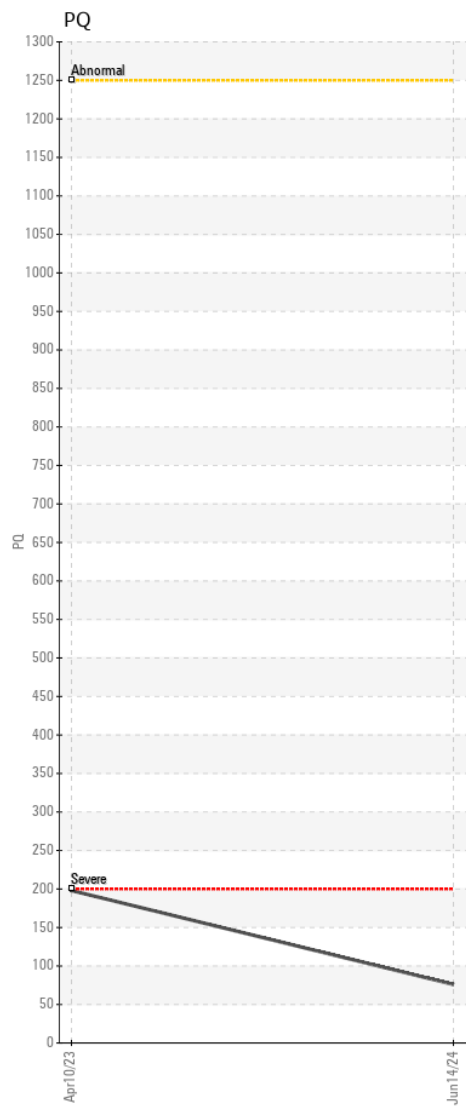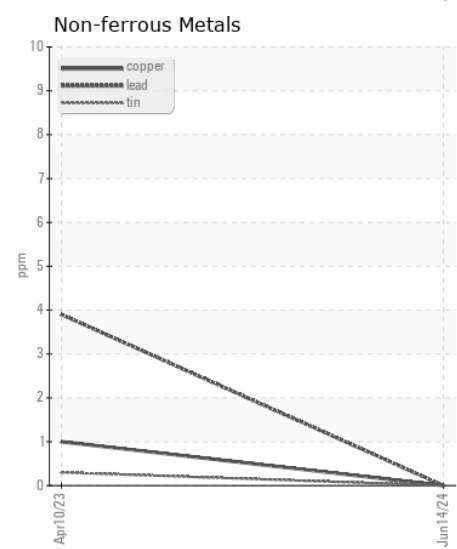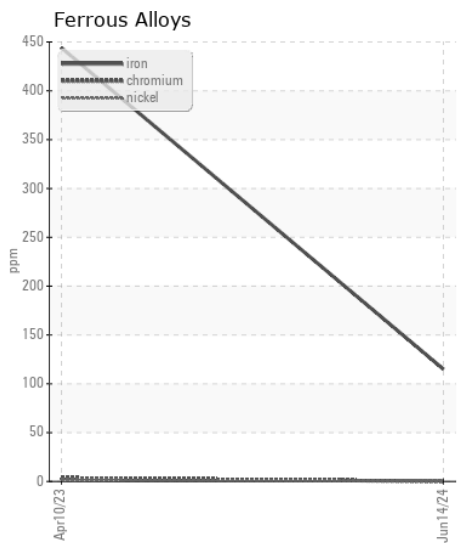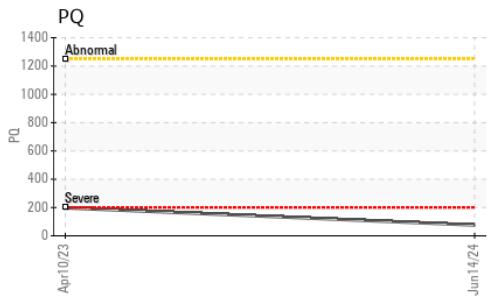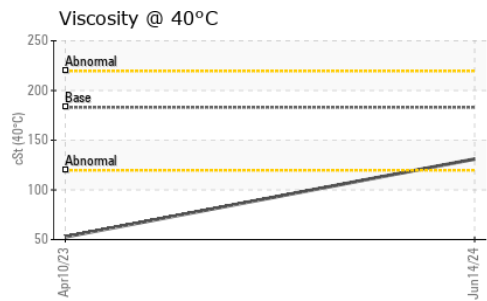

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0049316      **Received** : 03 Jul 2024  
**Lab Number** : 06227743      **Tested** : 05 Jul 2024  
**Unique Number** : 11111236      **Diagnosed** : 05 Jul 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**LANE PIPELINE**  
 2946 E MAIN ST  
 BRIDGEPORT, WV  
 US 26330  
 Contact: JESSE WILBURN  
 jessewilburn@gmail.com  
 T: (740)440-0927  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)