



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 333G 1T0333GMLNF418714
 Component
Right Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0215912	---	---
Sample Date		Client Info		01 Jul 2024	---	---
Machine Age	hrs	Client Info		643	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

PQ		ASTM D8184	>1250	52	---	---
Iron	ppm	ASTM D5185m	>750	868	---	---
Chromium	ppm	ASTM D5185m	>9	10	---	---
Nickel	ppm	ASTM D5185m	>10	8	---	---
Titanium	ppm	ASTM D5185m		2	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	19	---	---
Lead	ppm	ASTM D5185m	>15	0	---	---
Copper	ppm	ASTM D5185m	>40	1	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	56	---	---
Potassium	ppm	ASTM D5185m	>20	13	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	3	---	---
Boron	ppm	ASTM D5185m		9	---	---
Barium	ppm	ASTM D5185m		7	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		8	---	---
Magnesium	ppm	ASTM D5185m		6	---	---
Calcium	ppm	ASTM D5185m		50	---	---
Phosphorus	ppm	ASTM D5185m		282	---	---
Zinc	ppm	ASTM D5185m		34	---	---
Sulfur	ppm	ASTM D5185m		23228	---	---
Visc @ 40°C	cSt	ASTM D445		133	---	---

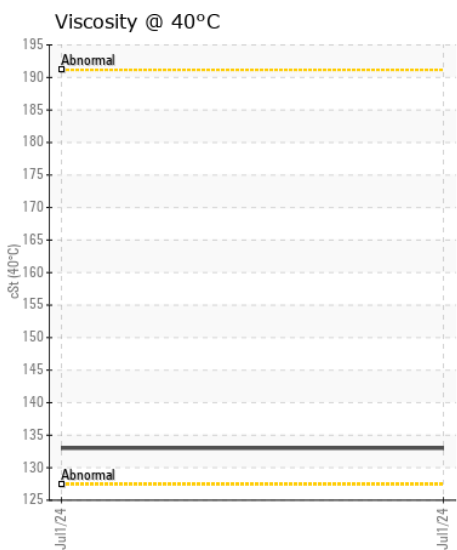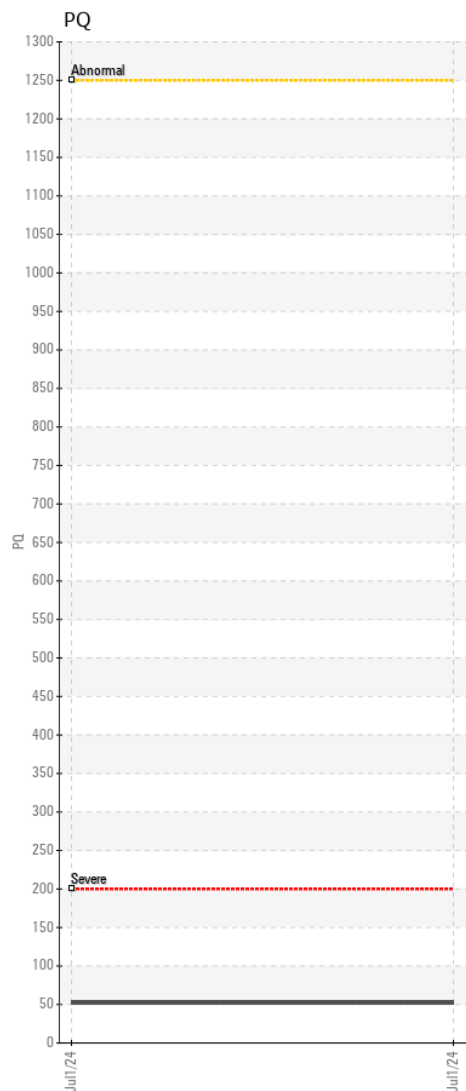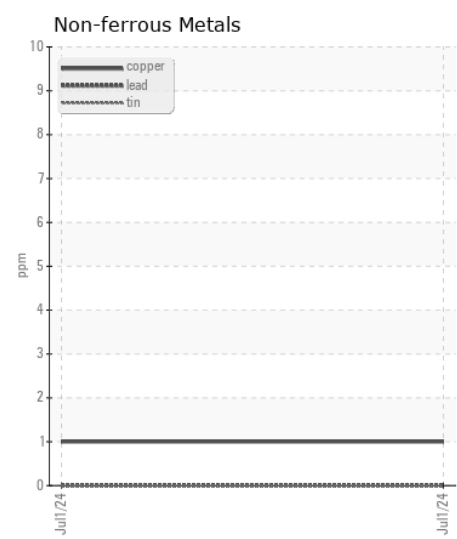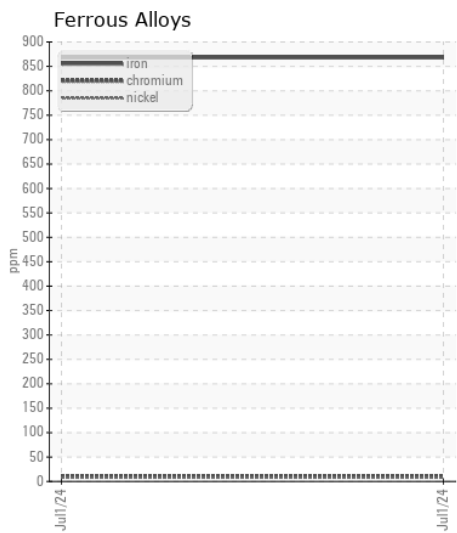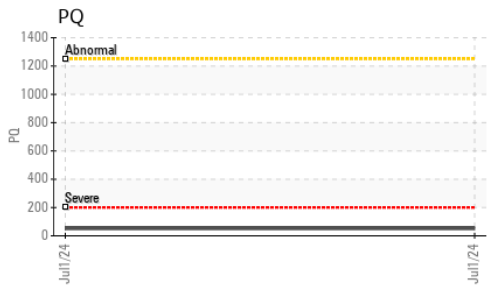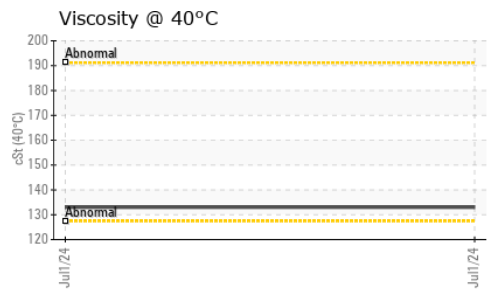

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0215912 **Received** : 03 Jul 2024
Lab Number : 06227795 **Tested** : 05 Jul 2024
Unique Number : 11111288 **Diagnosed** : 06 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: PQ)

JRE - STATESVILLE
 635 MOCKSVILLE HWY
 STATESVILLE, NC
 US 28625

Contact: MIKE CRANFILL
 MCRANFILL@JAMESRIVEREQUIPMENT.COM
 T: (704)872-6411

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)