



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 460P 1DW460PACRFB08088
 Component
Center Differential
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0007906	WE0006889	---
Sample Date		Client Info		01 Jul 2024	09 Apr 2024	---
Machine Age	hrs	Client Info		966	425	---
Oil Age	hrs	Client Info		966	425	---
Filter Age	hrs	Client Info		966	425	---
Oil Changed		Client Info		Not Changd	Changed	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		19	45	---
Iron	ppm	ASTM D5185m	>500	30	35	---
Chromium	ppm	ASTM D5185m	>10	0	<1	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	1	---
Lead	ppm	ASTM D5185m	>25	15	8	---
Copper	ppm	ASTM D5185m	>100	35	20	---
Tin	ppm	ASTM D5185m	>10	3	3	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	5	7	---
Potassium	ppm	ASTM D5185m	>20	<1	3	---
Water		WC Method	>.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	4	---
Boron	ppm	ASTM D5185m	6	4	<1	---
Barium	ppm	ASTM D5185m	0	3	4	---
Molybdenum	ppm	ASTM D5185m	0	0	2	---
Manganese	ppm	ASTM D5185m		2	3	---
Magnesium	ppm	ASTM D5185m	145	103	100	---
Calcium	ppm	ASTM D5185m	3570	3519	3619	---
Phosphorus	ppm	ASTM D5185m	1290	1100	1149	---
Zinc	ppm	ASTM D5185m	1640	1241	1208	---
Sulfur	ppm	ASTM D5185m		4526	4010	---
Visc @ 40°C	cSt	ASTM D445	57.0	49.5	51.4	---

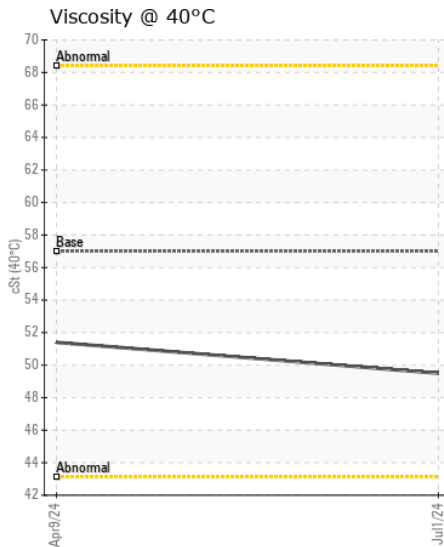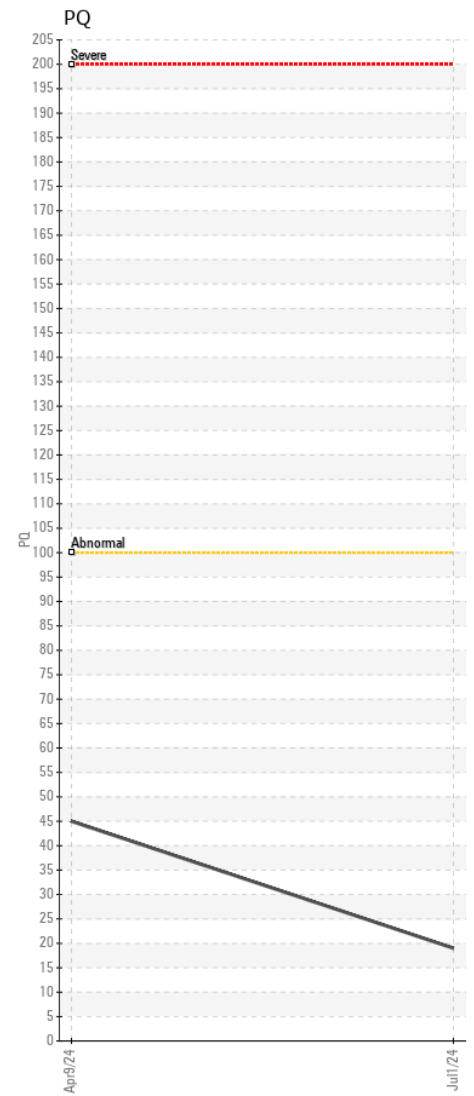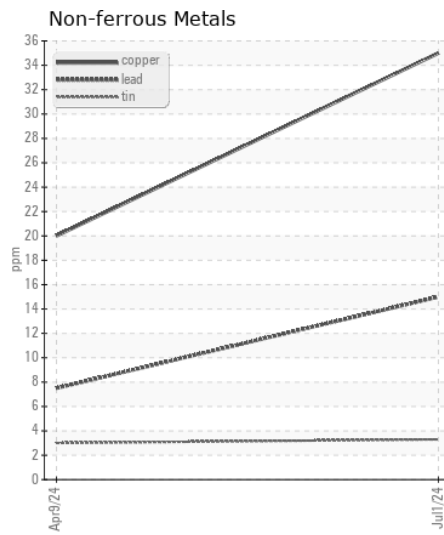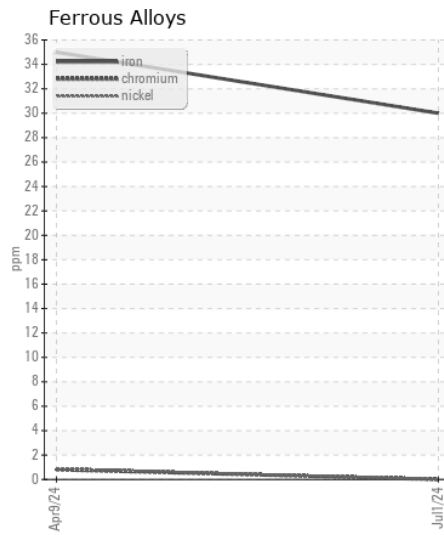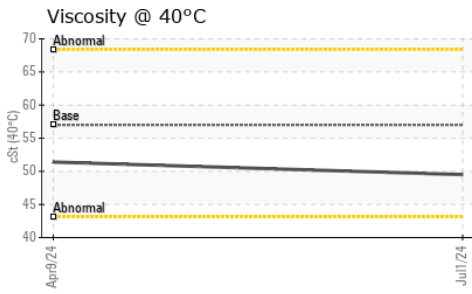

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WE0007906

Lab Number : 06227808

Unique Number : 11111301

Test Package : CONST (Additional Tests: PQ)

Received : 03 Jul 2024

Tested : 05 Jul 2024

Diagnosed : 05 Jul 2024 - Wes Davis

WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT

P.O. BOX 412

NORTHPORT, AL

US 35476

Contact: SCOTT GOOD

sgood@warriortractor.com

T: (205)339-0300

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)