



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[05W47779]

Machine Id

KLEEMAN MC110i EVO2 K1170114

Component

Conveyor Gearbox

Fluid

Wirtgen Group VG 220 (6 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0225698	JR0211153	JR0169745
Sample Date		Client Info		02 Jul 2024	04 Apr 2024	30 Jun 2023
Machine Age	hrs	Client Info		1975	1436	990
Oil Age	hrs	Client Info		1020	927	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		197	995	494
Iron	ppm	ASTM D5185m	>200	109	104	▲ 348
Chromium	ppm	ASTM D5185m	>10	<1	<1	5
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		<1	<1	<1
Lead	ppm	ASTM D5185m		0	0	<1
Copper	ppm	ASTM D5185m		0	<1	<1
Tin	ppm	ASTM D5185m		<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		7	5	11
Potassium	ppm	ASTM D5185m	>20	3	2	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	LIGHT	LIGHT
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	4
Boron	ppm	ASTM D5185m		4	0	0
Barium	ppm	ASTM D5185m		0	0	1
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		1	<1	2
Magnesium	ppm	ASTM D5185m		<1	5	2
Calcium	ppm	ASTM D5185m		3	47	26
Phosphorus	ppm	ASTM D5185m		440	435	396
Zinc	ppm	ASTM D5185m		0	3	5
Sulfur	ppm	ASTM D5185m		646	76	106
Visc @ 40°C	cSt	ASTM D445		230	229	● 228

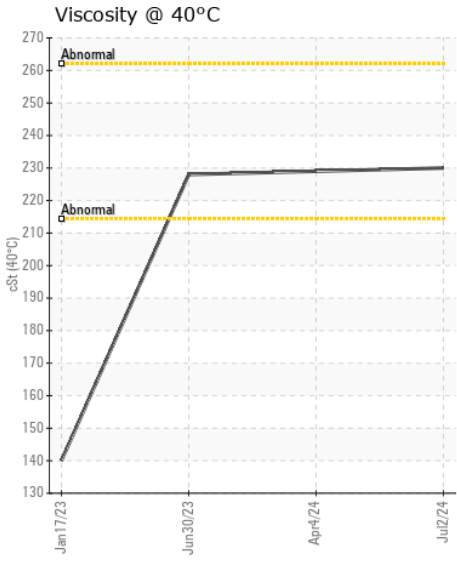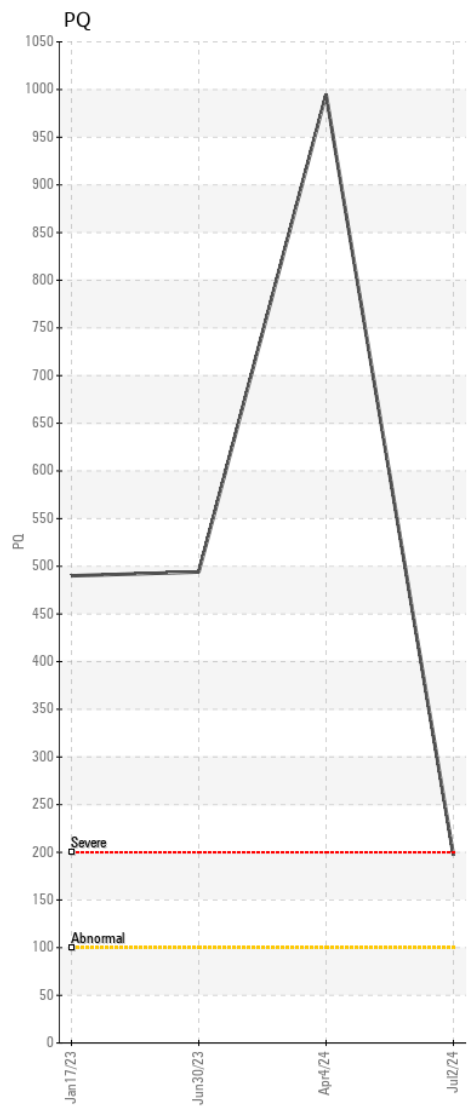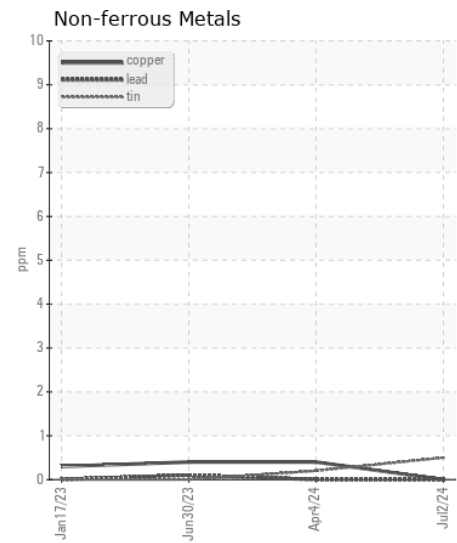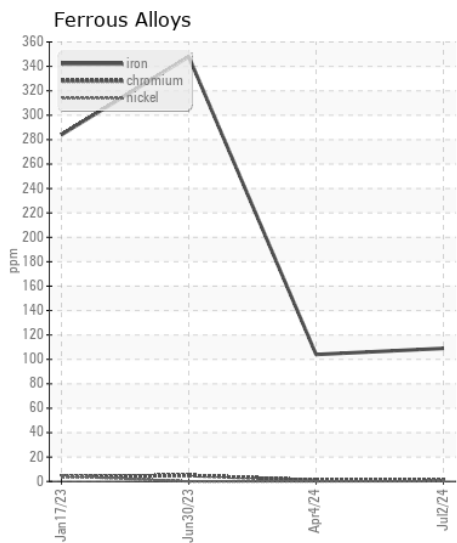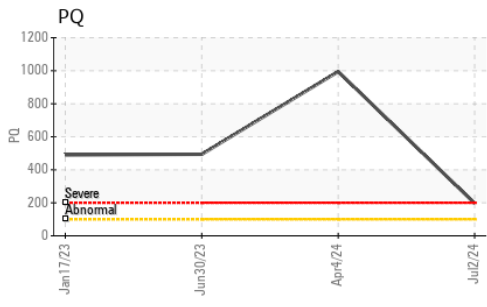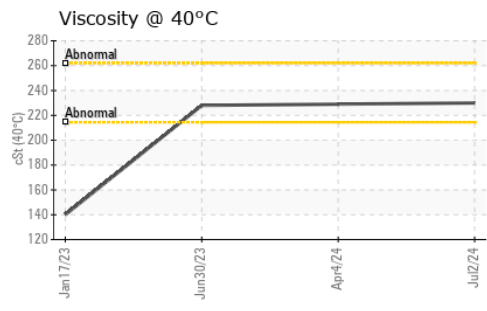

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0225698 **Received** : 03 Jul 2024
Lab Number : 06227813 **Tested** : 05 Jul 2024
Unique Number : 11111306 **Diagnosed** : 07 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: PQ)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111
 Contact: DON VEST
 dvest@jamesriverequipment.com
 T: (703)631-8500
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)