



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**SENNEBOGEN 830M-T 830.0.2922**  
 Component  
**Front Right 6WD Hub**  
 Fluid  
**JOHN DEERE GL-5 80W90 (2 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0214041</b>	JR0213843	JR0193917
Sample Date		Client Info		<b>02 Jul 2024</b>	05 Jun 2024	14 Apr 2024
Machine Age	hrs	Client Info		<b>11681</b>	11185	10160
Oil Age	hrs	Client Info		<b>10160</b>	1025	1594
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>55</b>	67	103
Iron	ppm	ASTM D5185m	>200	<b>91</b>	79	96
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m		<b>&lt;1</b>	0	2
Lead	ppm	ASTM D5185m		<b>0</b>	0	<1
Copper	ppm	ASTM D5185m		<b>3</b>	3	5
Tin	ppm	ASTM D5185m		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		<b>6</b>	6	9
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	<1	2
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>5</b>	5	6
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	1
Manganese	ppm	ASTM D5185m		<b>2</b>	1	2
Magnesium	ppm	ASTM D5185m		<b>1</b>	0	4
Calcium	ppm	ASTM D5185m		<b>19</b>	10	29
Phosphorus	ppm	ASTM D5185m		<b>455</b>	451	534
Zinc	ppm	ASTM D5185m		<b>16</b>	12	27
Sulfur	ppm	ASTM D5185m		<b>20975</b>	19739	22478
Visc @ 40°C	cSt	ASTM D445		<b>123</b>	124	123

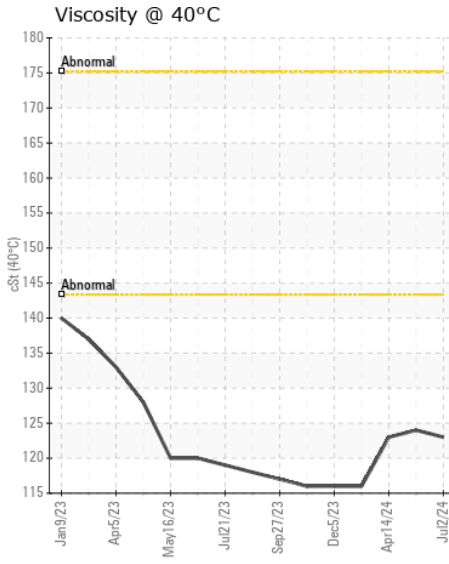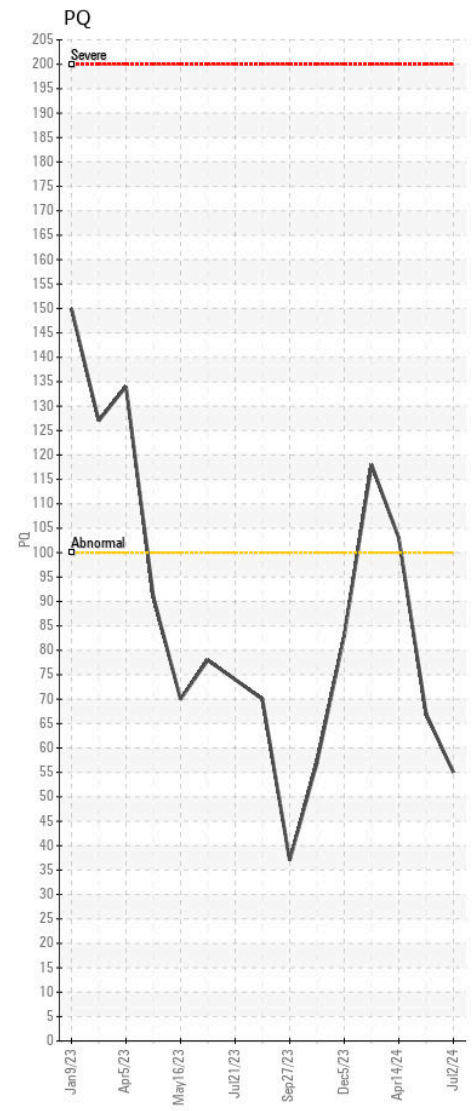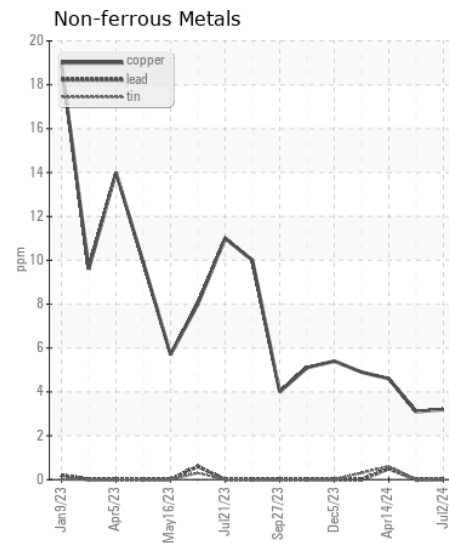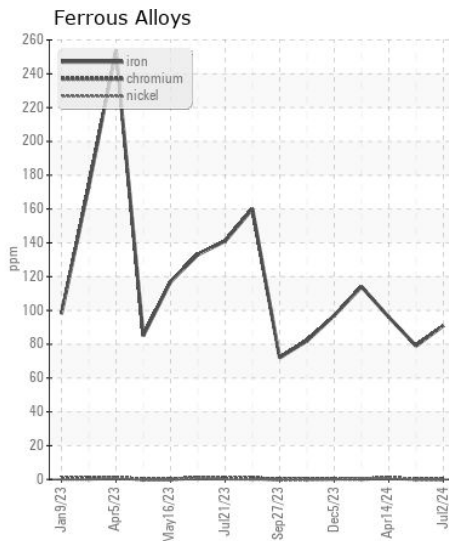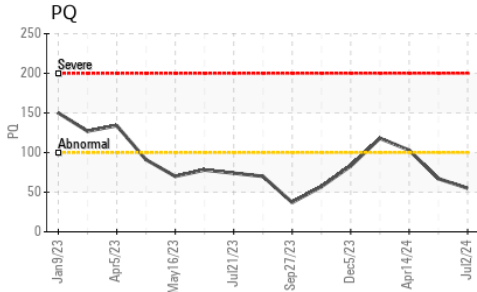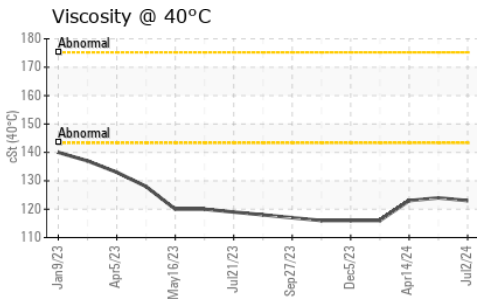

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0214041 **Received** : 03 Jul 2024  
**Lab Number** : 06227823 **Tested** : 05 Jul 2024  
**Unique Number** : 11111316 **Diagnosed** : 07 Jul 2024 - Don Baldridge  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - GREENVILLE**  
 3604 HIGHWAY 264 E  
 GREENVILLE, NC  
 US 27834-5800

Contact: GREENVILLE SHOP  
christopher.martin@jamesriverequipment.com

T:  
F: