



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 944k 1DW944KSKLF703589
Component
Gear Case
Fluid
JOHN DEERE HY-GARD HYD/TRANS (9 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0050044	LEC0048523	LEC0031578
Sample Date		Client Info		01 Jul 2024	05 Apr 2024	13 Nov 2023
Machine Age	hrs	Client Info		5979	5490	4978
Oil Age	hrs	Client Info		1508	1019	507
Filter Age	hrs	Client Info		0	1019	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		N/A	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		17	14	7
Iron	ppm	ASTM D5185m	>200	4	7	3
Chromium	ppm	ASTM D5185m	>5	0	<1	0
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>5	<1	2	1
Lead	ppm	ASTM D5185m	>5	<1	3	2
Copper	ppm	ASTM D5185m	>15	3	3	2
Tin	ppm	ASTM D5185m	>5	0	1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>15	5	6	5
Potassium	ppm	ASTM D5185m	>20	<1	3	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	1	3
Boron	ppm	ASTM D5185m	6	4	0	2
Barium	ppm	ASTM D5185m	0	0	<1	0
Molybdenum	ppm	ASTM D5185m	0	0	1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	145	99	97	104
Calcium	ppm	ASTM D5185m	3570	3586	3491	3576
Phosphorus	ppm	ASTM D5185m	1290	1053	1075	1122
Zinc	ppm	ASTM D5185m	1640	1254	1263	1365
Sulfur	ppm	ASTM D5185m		3996	3951	3915
Visc @ 40°C	cSt	ASTM D445	57.0	50.3	51.1	51.2

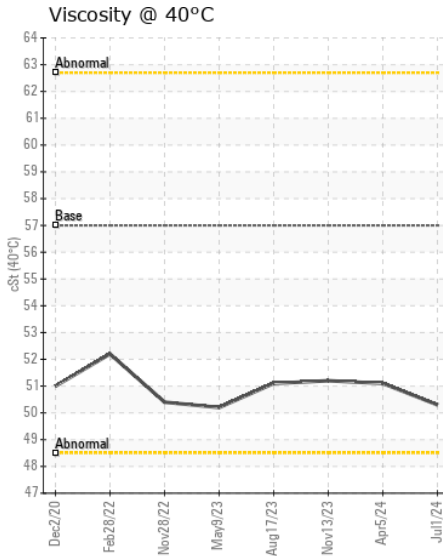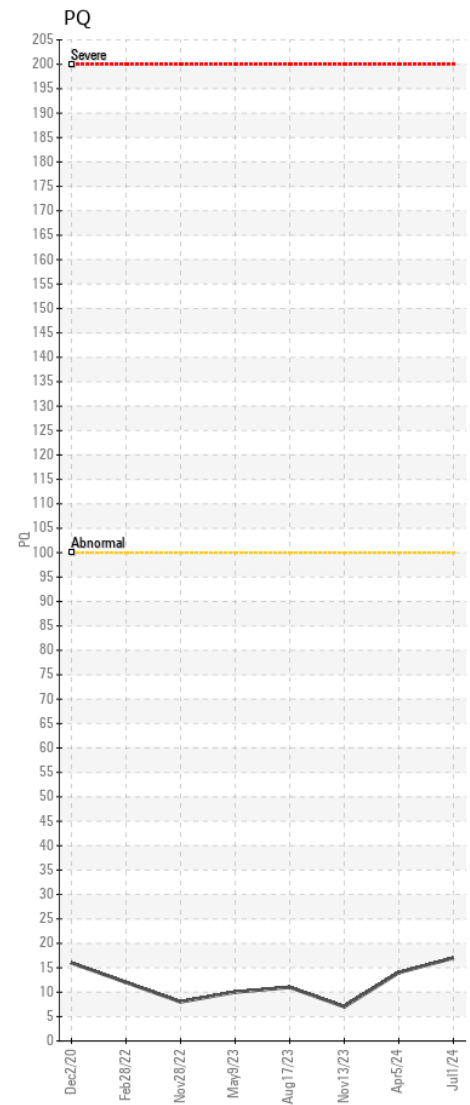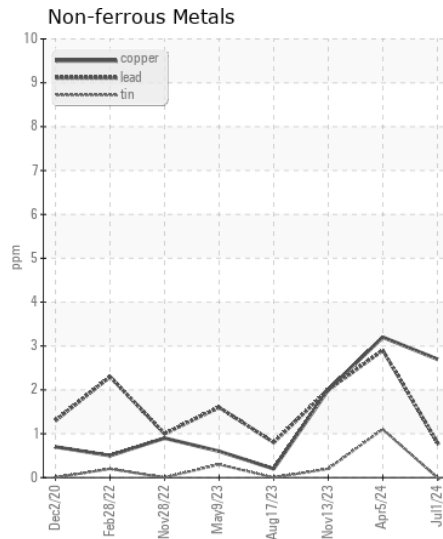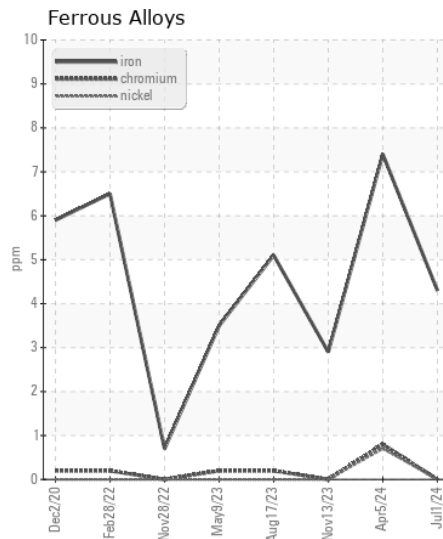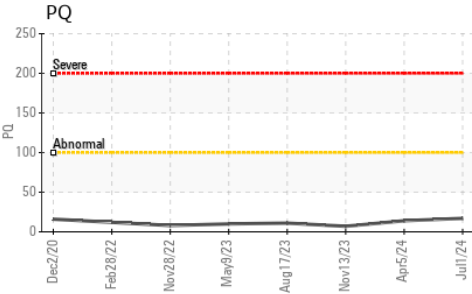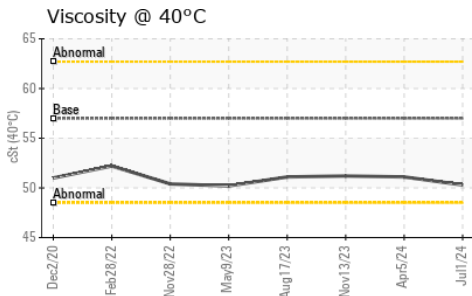

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0050044 **Received** : 03 Jul 2024
Lab Number : 06227843 **Tested** : 05 Jul 2024
Unique Number : 11111336 **Diagnosed** : 07 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

APPALACHIAN AGGREGATES
 2950 CHARLES AVENUE
 DUNBAR, WV
 US 25064
 Contact: VERNON SPARKS
 vernon.sparks@appagg.wv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: