



# OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 944k 1DW944KSKLF703589**  
Component  
**Front Right Final Drive**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (14 GAL)**

## RECOMMENDATION

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0050046</b>	LEC0048526	LEC0031575
Sample Date		Client Info		<b>01 Jul 2024</b>	05 Apr 2024	13 Nov 2023
Machine Age	hrs	Client Info		<b>5979</b>	5490	4978
Oil Age	hrs	Client Info		<b>1974</b>	1485	973
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR

The copper level is abnormal. All other component wear rates are normal.

PQ		ASTM D8184	>1250	<b>14</b>	15	16
Iron	ppm	ASTM D5185m	>750	<b>15</b>	15	13
Chromium	ppm	ASTM D5185m	>9	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>&lt;1</b>	2	2
Lead	ppm	ASTM D5185m	>15	<b>0</b>	<1	1
Copper	ppm	ASTM D5185m	>40	<b>▲ 102</b>	▲ 74	▲ 73
Tin	ppm	ASTM D5185m	>10	<b>0</b>	1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>18</b>	17	17
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	2
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>2</b>	1	2
Boron	ppm	ASTM D5185m	6	<b>2</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	145	<b>98</b>	97	102
Calcium	ppm	ASTM D5185m	3570	<b>3506</b>	3475	3468
Phosphorus	ppm	ASTM D5185m	1290	<b>1049</b>	1124	1091
Zinc	ppm	ASTM D5185m	1640	<b>1245</b>	1276	1344
Sulfur	ppm	ASTM D5185m		<b>4018</b>	4142	3914
Visc @ 40°C	cSt	ASTM D445	57.0	<b>53.1</b>	53.5	54.5

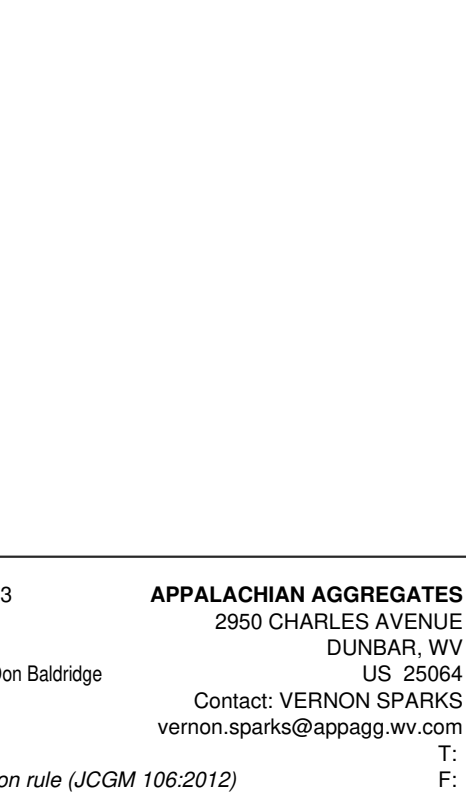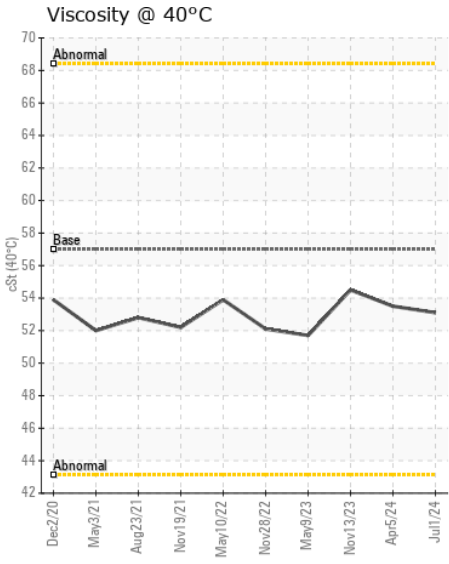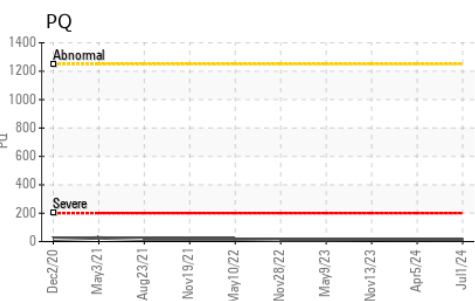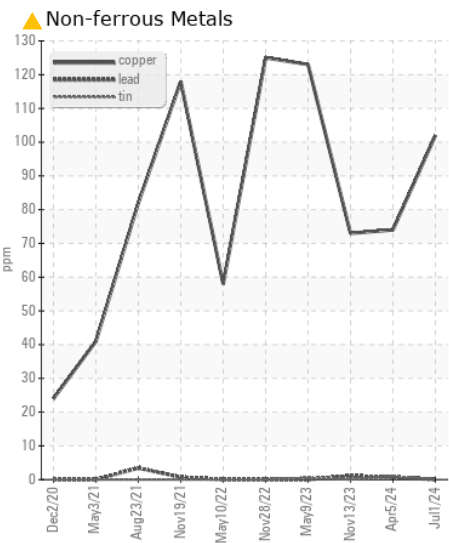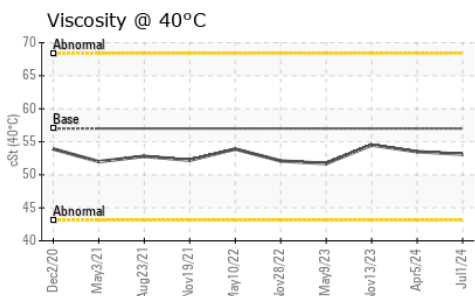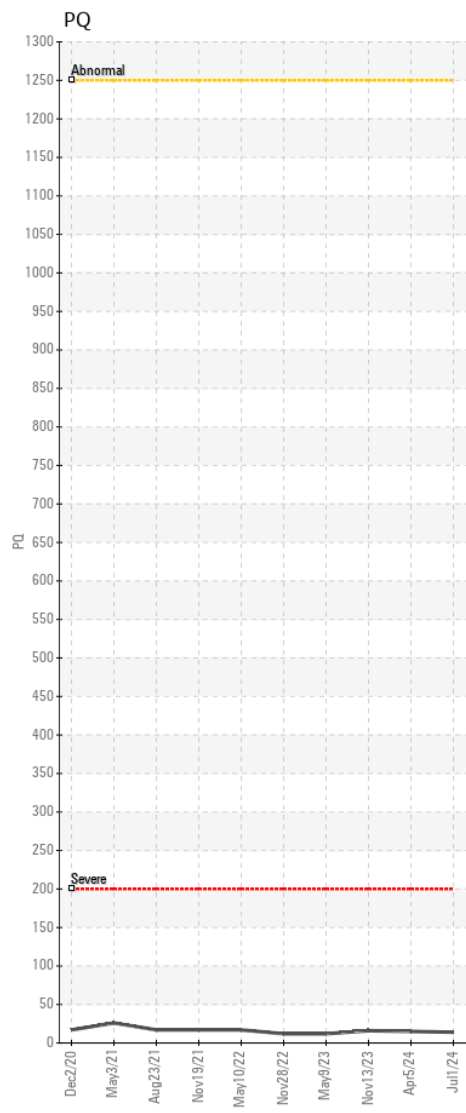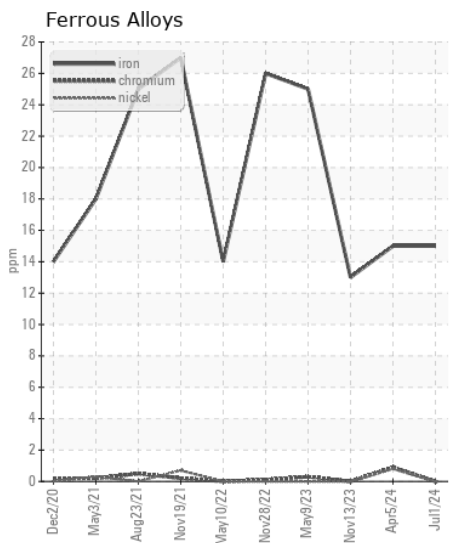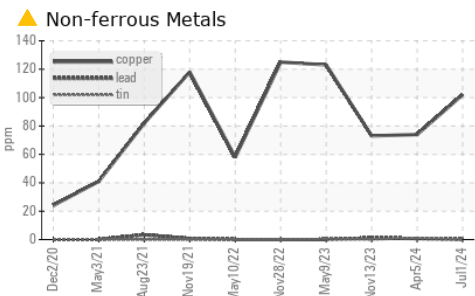

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0050046 **Received** : 03 Jul 2024  
**Lab Number** : 06227844 **Tested** : 05 Jul 2024  
**Unique Number** : 11111337 **Diagnosed** : 07 Jul 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**APPALACHIAN AGGREGATES**  
 2950 CHARLES AVENUE  
 DUNBAR, WV  
 US 25064  
 Contact: VERNON SPARKS  
 vernon.sparks@appagg.wv.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)