



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[232292]

Machine Id

JOHN DEERE 1FF190GWCMF052117

Component

Center Drive

Fluid

JOHN DEERE HY-GARD HYDRAULIC/RANSMISSION (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 232292)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0007690	---	---
Sample Date		Client Info		01 Jul 2024	---	---
Machine Age	hrs	Client Info		1207	---	---
Oil Age	hrs	Client Info		1207	---	---
Filter Age	hrs	Client Info		1207	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		None	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		17	---	---
Iron	ppm	ASTM D5185m	>500	38	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>25	2	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	13	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m		65	---	---
Barium	ppm	ASTM D5185m		4	---	---
Molybdenum	ppm	ASTM D5185m		104	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		23	---	---
Calcium	ppm	ASTM D5185m		4315	---	---
Phosphorus	ppm	ASTM D5185m		1255	---	---
Zinc	ppm	ASTM D5185m		1388	---	---
Sulfur	ppm	ASTM D5185m		9544	---	---
Visc @ 40°C	cSt	ASTM D445	59	60.6	---	---

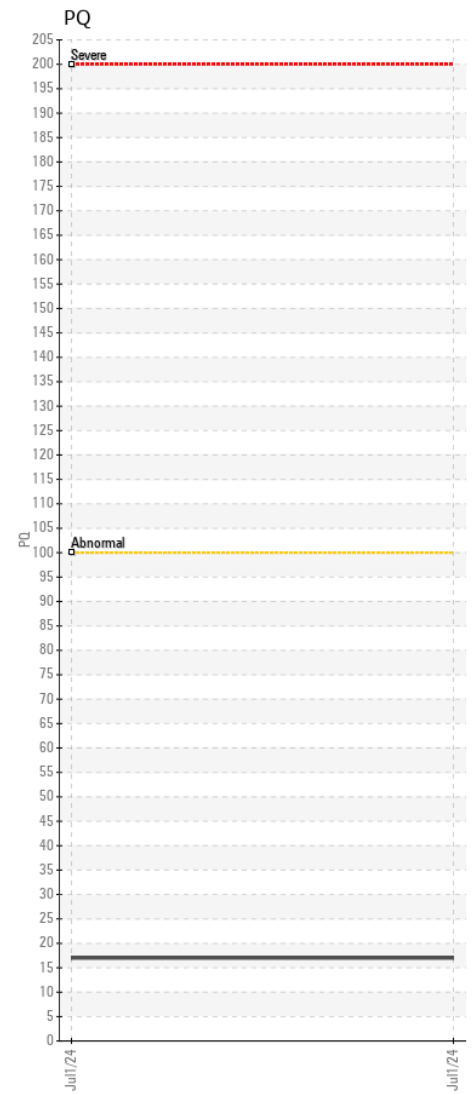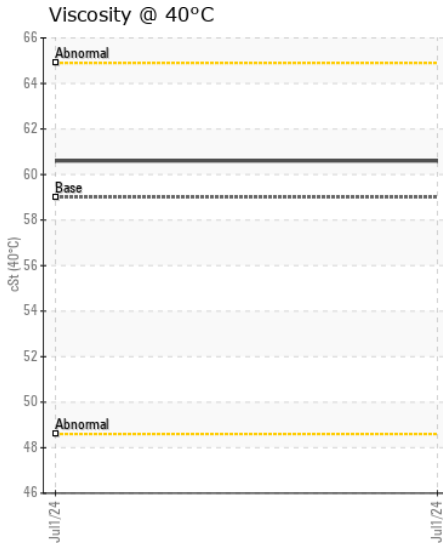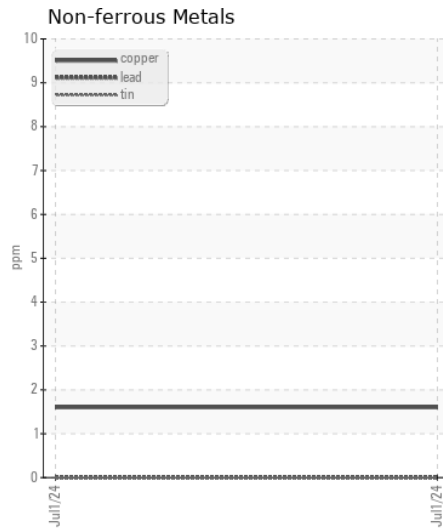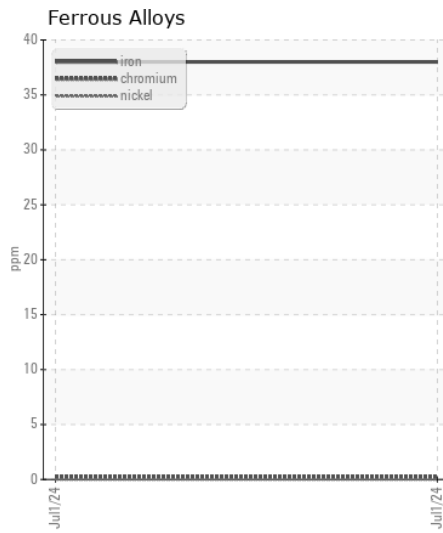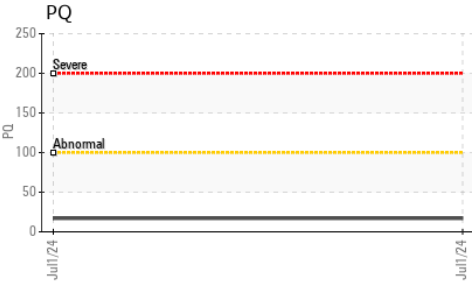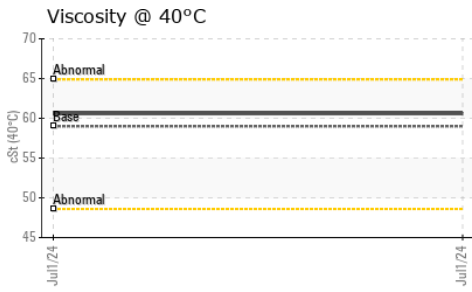

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WE0007690

Lab Number : 06227845

Unique Number : 11111338

Test Package : CONST (Additional Tests: PQ)

Received : 03 Jul 2024

Tested : 07 Jul 2024

Diagnosed : 07 Jul 2024 - Don Baldrige

WARRIOR TRACTOR AND EQUIPMENT - HUNTSVILLE

25135 ONE AVIATION WAY SW

MADISON, AL

US 35756

Contact: BOBBY LUCKY

warriorparts033@gmail.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)